


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

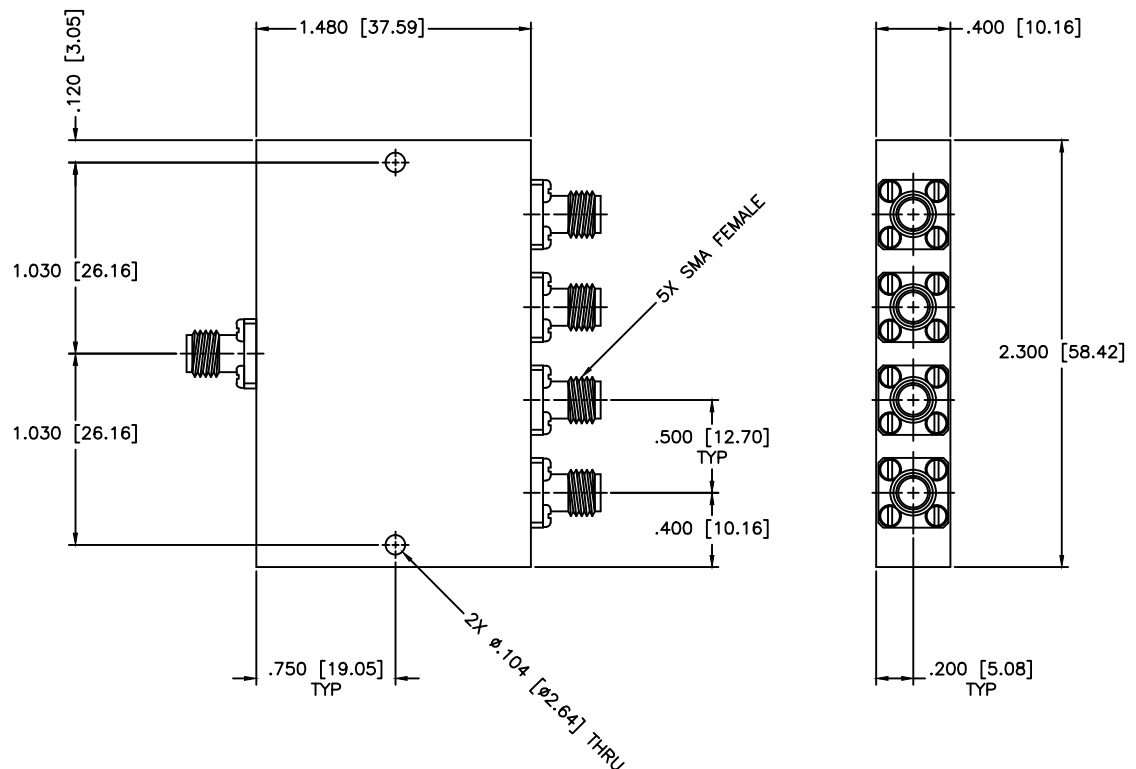

**SPECIFICATIONS**

Frequency Range: 950–2150 MHz  
 Insertion Loss: 0.8dB Max.  
 Isolation: 19dB Min.  
 VSWR Input/Output: 1.50:1/1.40:1 Max.  
 Amplitude Balance: ±0.3dB Max.  
 Phase Balance: ±5 Deg. Max.  
 Power: 30W (Load vswr@1.2)

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWING TITLE:		4-WAY POWER DIVIDER		
PART NO.:		PS4-175		
DRAWN: Paiboon Luekhamhan	DATE: 06-29-1999	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE: A REV: N/A DWG NO.
APPROVED: T. Nguyen	DATE: 06-29-1999		THIRD ANGLE PROJECTION 	OD2L5 DO NOT SCALE THE DRAWING