


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

Frequency Range: 1–2 GHz
 VSWR In/Out: 1.45:1/1.30:1 Max.
 Insertion Loss: 0.8dB Max.
 Isolation: 18dB Min.
 Amplitude Balance: ± 0.3 dB Max.
 Phase Balance: ± 5 Deg. Max.
 Power: 30 Watts

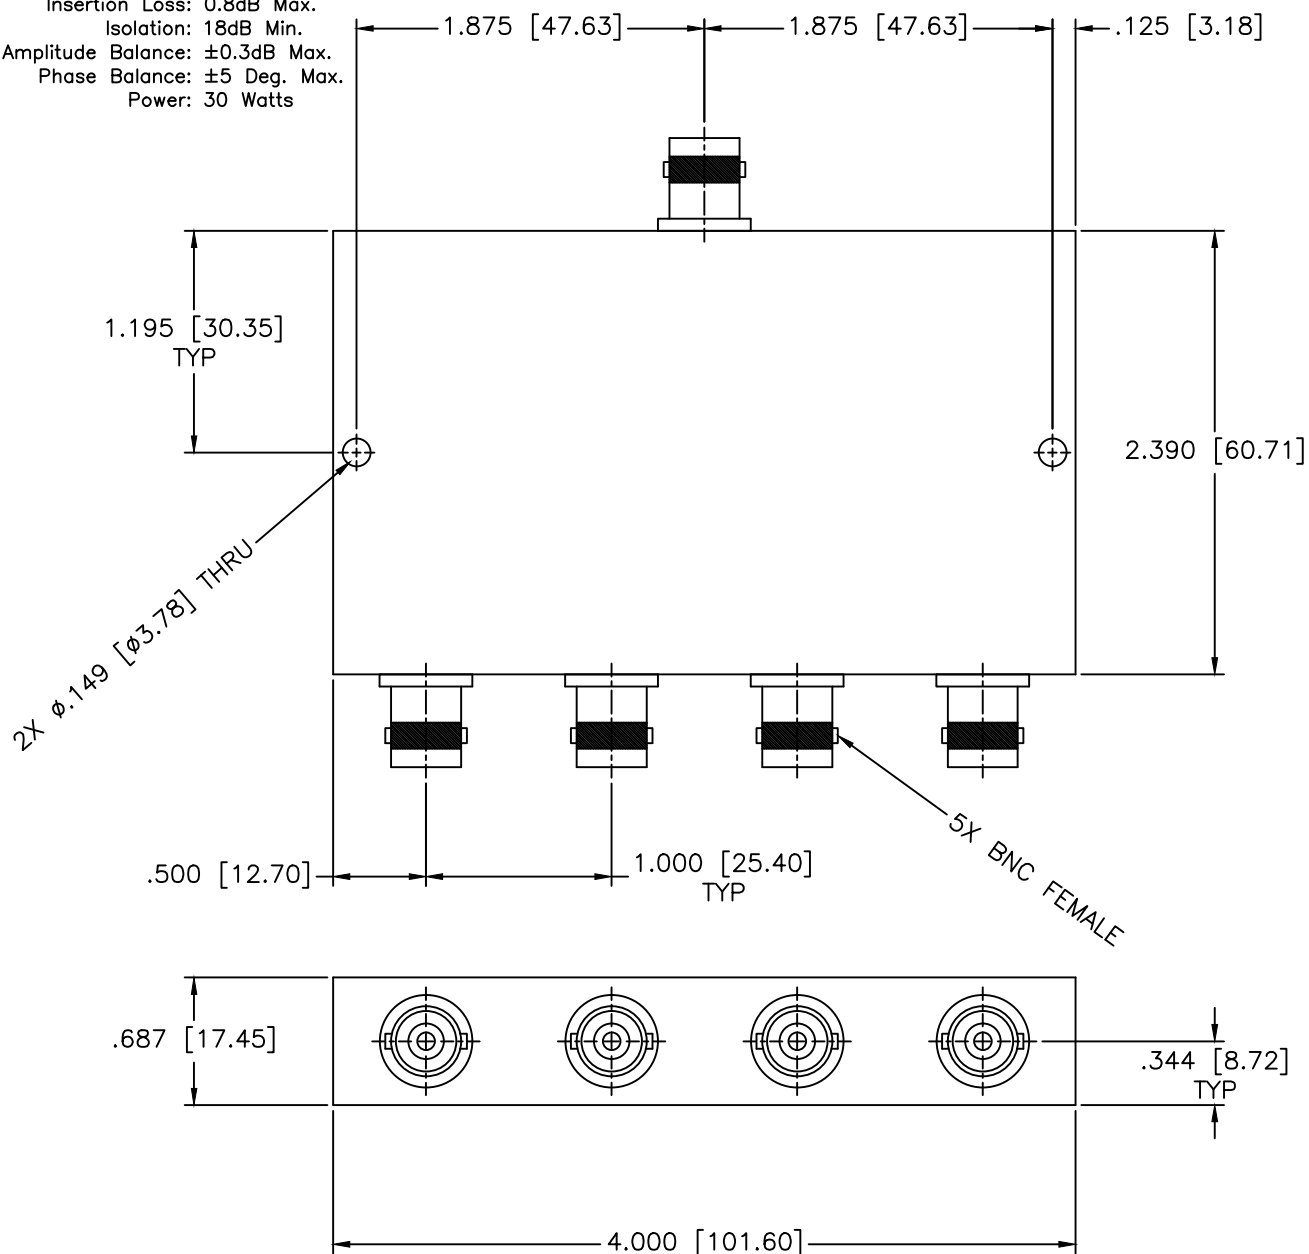

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 09-15-1999 APPROVED: T. Nguyen DATE: 09-15-1999		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .008$ ANGLE: $\pm 1/2^\circ$ PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION		DRAWING TITLE: 4-WAY POWER DIVIDER	
				PART NO. PS4-2-75/BF	
		CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 81376
DO NOT SCALE THE DRAWING					