


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

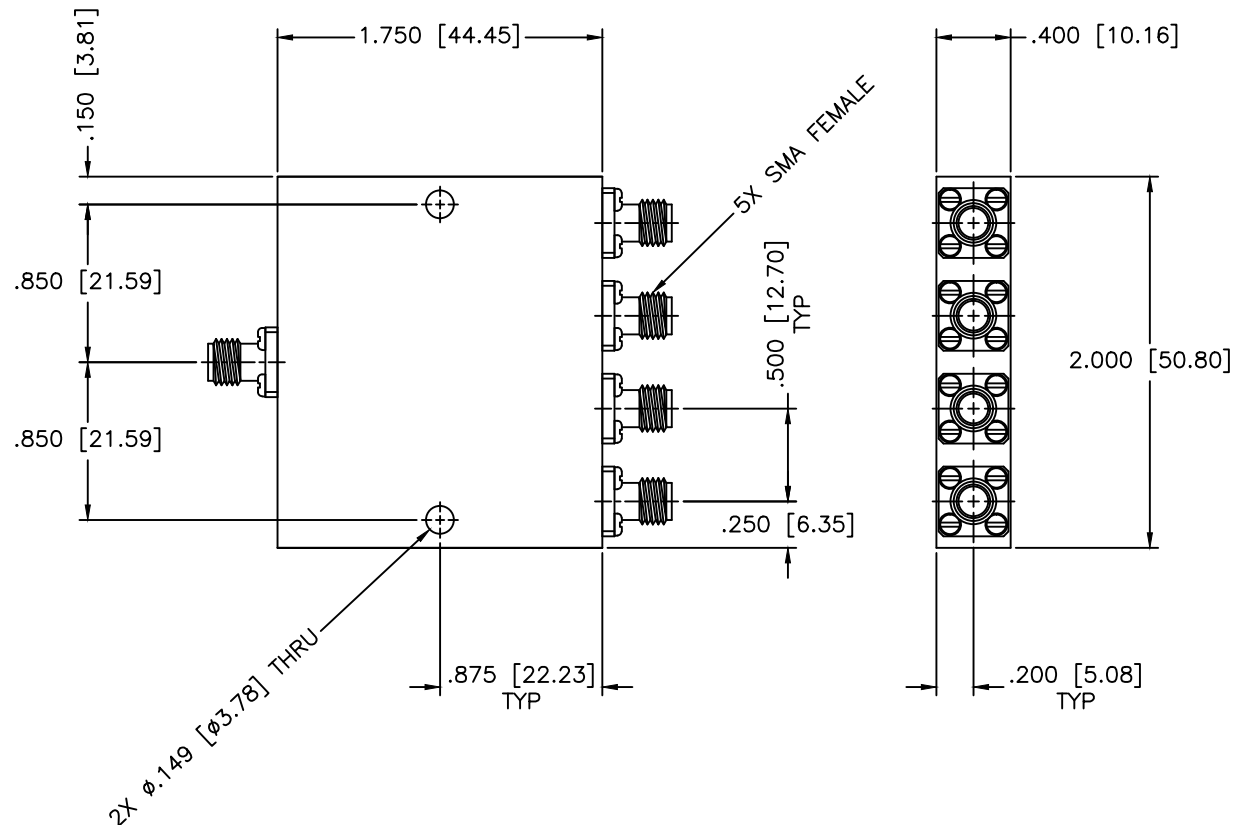

SPECIFICATIONS

Frequency Range: 5.8–6.4 GHz
 Insertion Loss: 0.7dB Max.
 Isolation: 20dB Min.
 VSWR In/Out: 1.30:1/1.20:1 Max.
 Phase Balance: ±4 Deg. Max.
 Amplitude Balance: ±0.3dB Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		4-WAY POWER DIVIDER
DRAWN:		DATE:		PART NO.		PS4-20
Paiboon Luekhamhan 09-07-1999		T. Nguyen 09-07-1999		CAGE CODE:		OD2L5
APPROVED:		DATE:		SIZE:	REV:	DWG NO.
T. Nguyen		09-07-1999		A	N/A	80188
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		