


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

Frequency Range: 2-40 GHz
 Insertion Loss: 5.0dB Max.
 Isolation: 13dB Min.
 VSWR: 1.65:1/1.65:1 Max.
 Amplitude balance: ±0.8dB Max.
 Phase balance: ±9° Max.

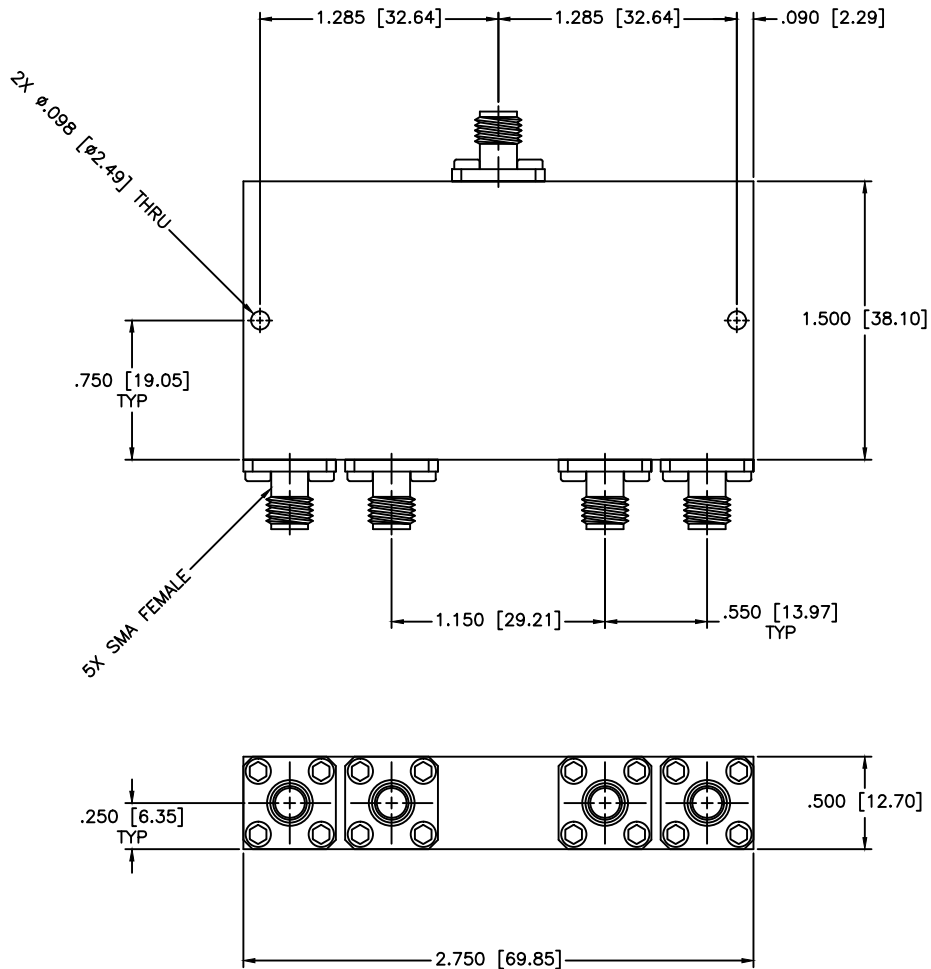

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°		DRAWING TITLE: 4-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 03-05-2010	PART NO. PS4-203		
APPROVED: T. Nguyen		DATE: 03-05-2010	CAGE CODE: OD2L5	SIZE: A	REV: N/A
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DWG NO. 84735	
		THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING	