


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

**SPECIFICATIONS**

Frequency Range: 10–40 GHz  
 Insertion Loss: 2.6dB Max.  
 Isolation: 18dB Min.  
 VSWR: 1.65:1 Max.  
 Amplitude balance: ±0.7dB Max.  
 Phase balance: ±8 Deg. Max.  
 Power: 20W Avg, 3kW Peak.

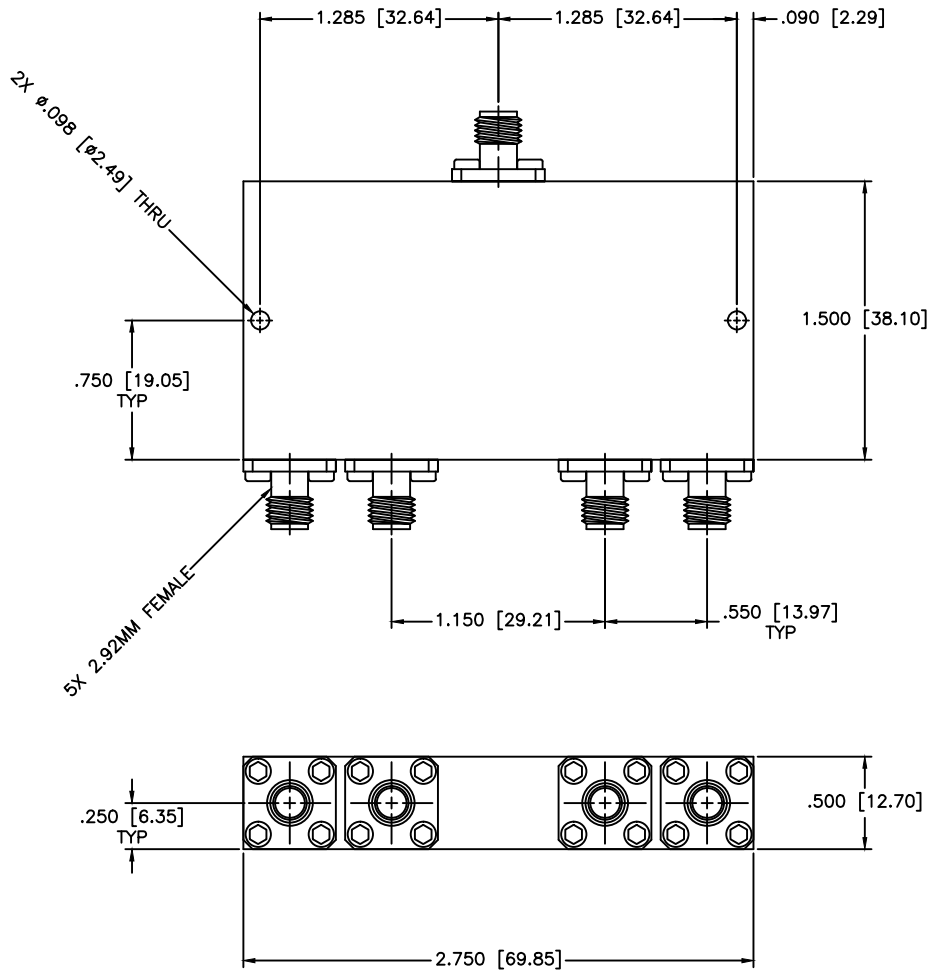

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°		DRAWING TITLE: 4-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PS4-209		
DATE: 09-02-2010	DATE: 09-02-2010	CAGE CODE: OD2L5	SIZE: A	REV: N/A
APPROVED: T. Nguyen	DATE: 09-02-2010	DWG NO. 85048		DO NOT SCALE THE DRAWING

