


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

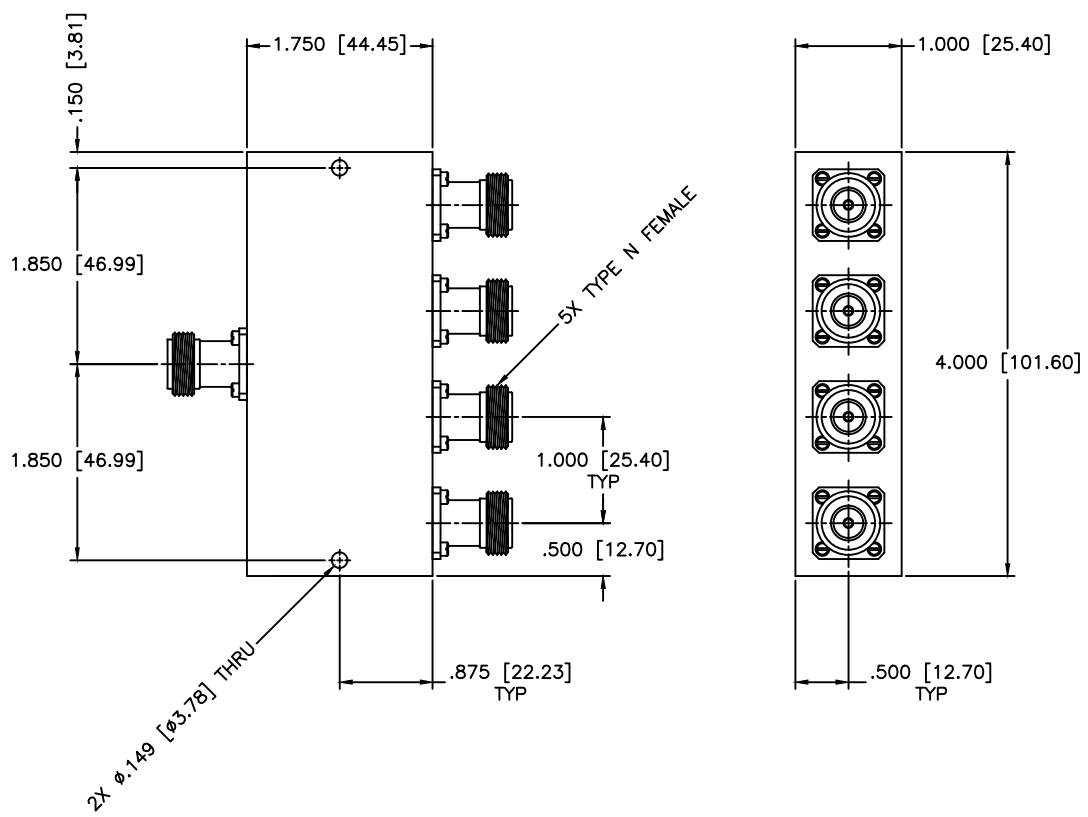

**SPECIFICATIONS**

Frequency Range: 5.8–6.45 GHz  
 Insertion Loss: 0.6dB Max.  
 Isolation: 19dB Min.  
 VSWR In/Out: 1.35:1/1.30:1 Max.  
 Phase Balance: ±4 Deg. Max.  
 Amplitude Balance: ±0.3dB Max.  
 Power: 30W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		4-WAY POWER DIVIDER	
DRAWING:		PART NO.:		PS4-20/NF		
DATE:		CAGE CODE:		SIZE:	REV:	DWG NO.:
Paiboon Luexhamhan		05-19-1999		N/A		80205
APPROVED:		DATE:		DO NOT SCALE THE DRAWING		
T. Nguyen		05-19-1999				
THIRD ANGLE PROJECTION						