


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

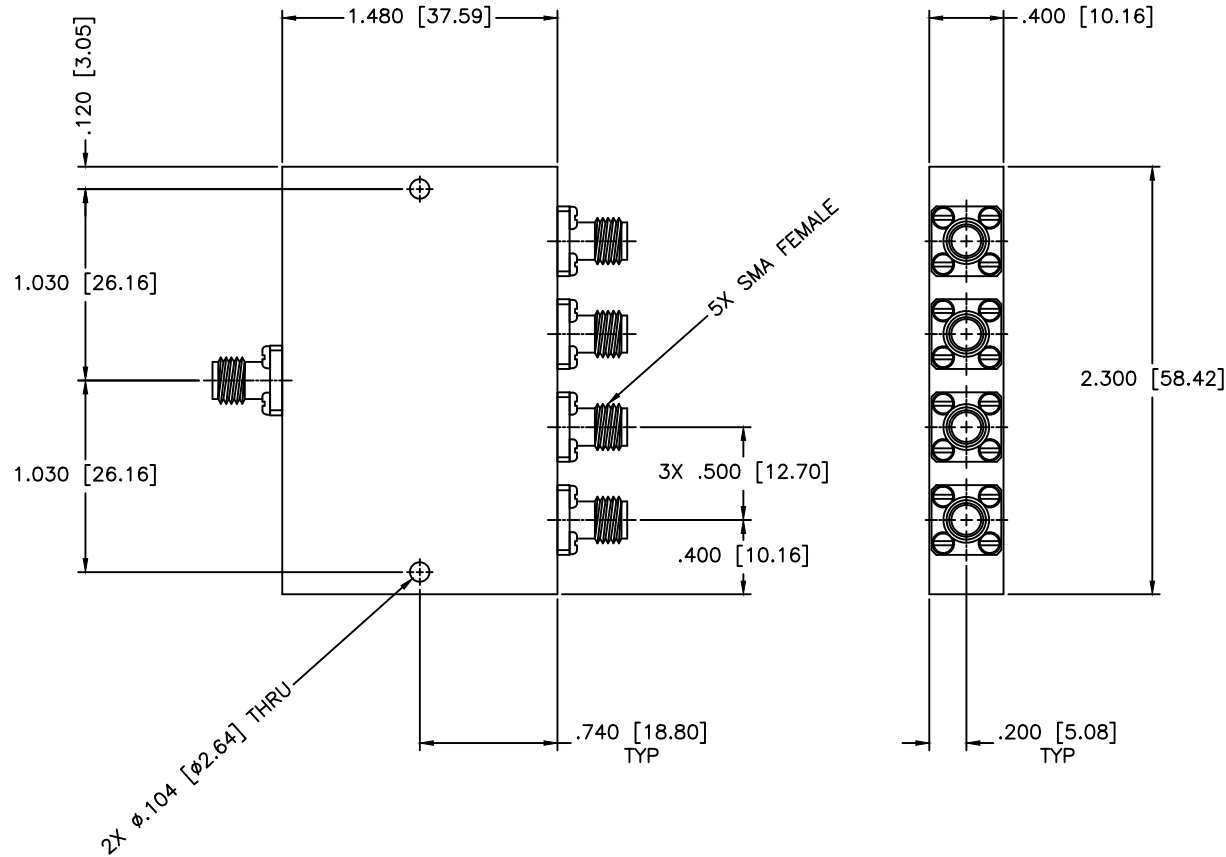

**SPECIFICATIONS**

Frequency Range: 1.95–4.25 GHz  
 Insertion Loss: 0.5dB Max.  
 Isolation: 20dB Min.  
 VSWR: 1.30:1 Max.  
 Amplitude Balance: ±0.2dB Max.  
 Power: 2 Watts CW

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 09-07-2011
APPROVED: T. Nguyen	DATE: 09-07-2011

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: 4-WAY POWER DIVIDER			
PART NO. PS4-214			
CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 85885
DO NOT SCALE THE DRAWING			

FREQUENTLY MISUSED:  
THE INFORMATION IN THIS DRAWING IS PROPRIETARY  
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN  
PERMISSION FROM MICROWAVE COMMUNICATIONS  
LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION