


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

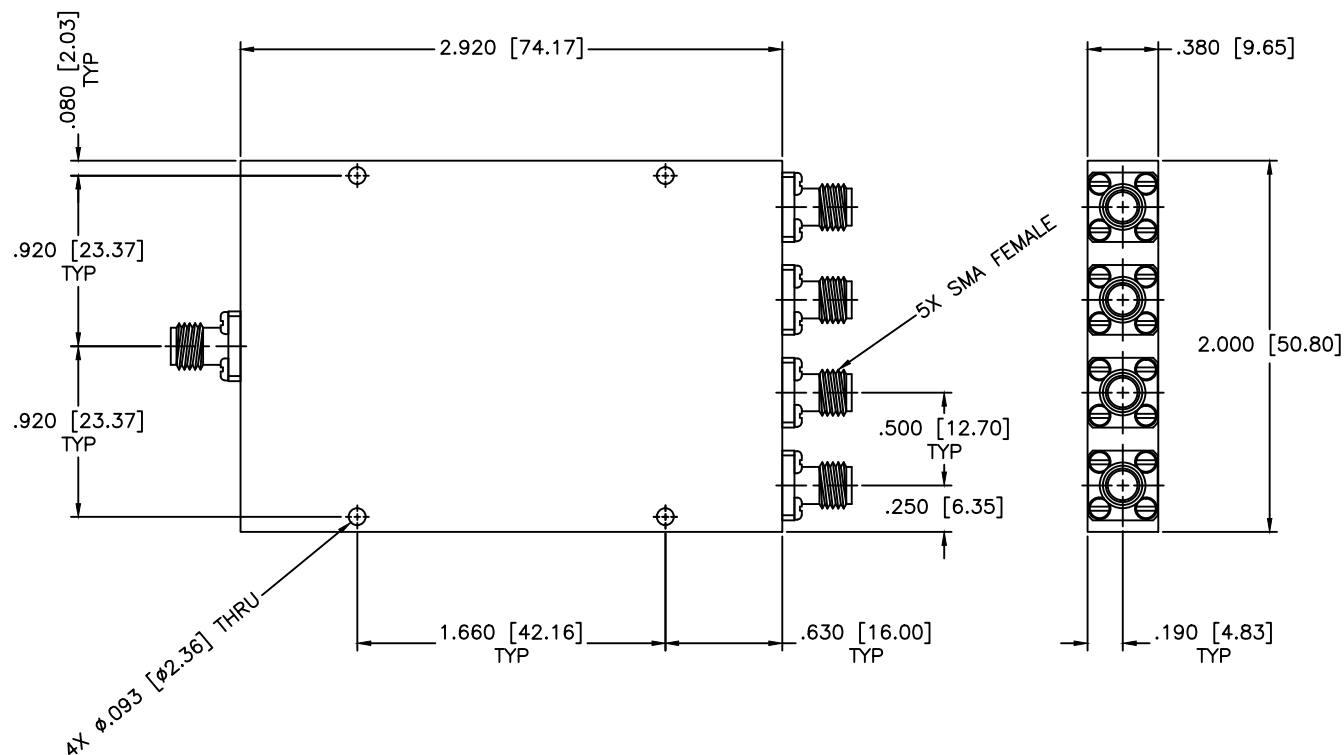

SPECIFICATIONS

Frequency Range: 0.5–2.0 GHz
 Insertion Loss: 0.7dB Max.
 Isolation: 20dB Min.
 VSWR In/Out: 1.45:1/1.30:1 Max.
 Amplitude Balance: ± 0.2 dB Max.
 Phase Balance: ± 6 Deg. Max.
 Power: 30 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 4-WAY POWER DIVIDER
DRAWN: Paiboon Luekhamhan DATE: 04-29-2014		PART NO.: PS4-3-MA		
APPROVED: T. Nguyen DATE: 04-29-2014		CAGE CODE: OD2L5 SIZE: A REV: N/A DO NOT SCALE THE DRAWING	DWG NO.: 86516	