


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

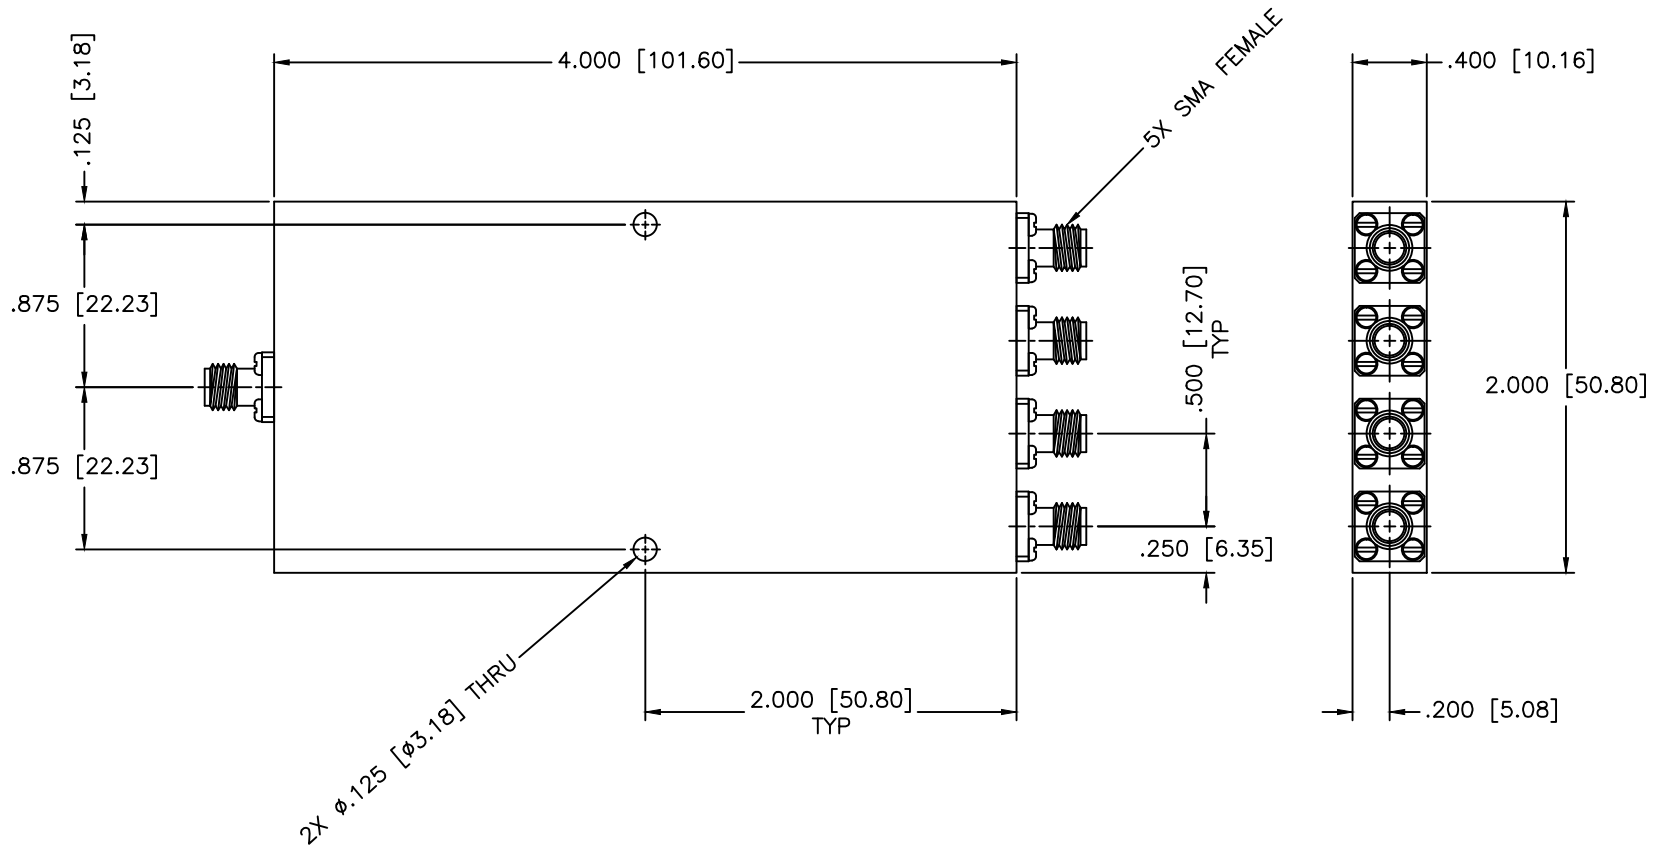

SPECIFICATIONS

Frequency Range: 0.8–1.5 GHz
 Insertion Loss: 2.0dB Max.
 Isolation: 18dB Min.
 VSWR: 1.50:1 Max.
 Amplitude Balance: ± 0.25 dB Max.
 Phase Balance: ± 6 Deg. Max.
 Power: 30W (vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
					SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE:			
			4-WAY POWER DIVIDER			
			PART NO.			
			PS4-31			
DRAWN:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE:	REV:	DWG NO.
Paiboon Luekhamhan	02-24-1998		OD2L5	A	N/A	80925
APPROVED:	DATE:		DO NOT SCALE THE DRAWING			
T. Nguyen	02-24-1998					