


4 | 3 | 2 | 1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

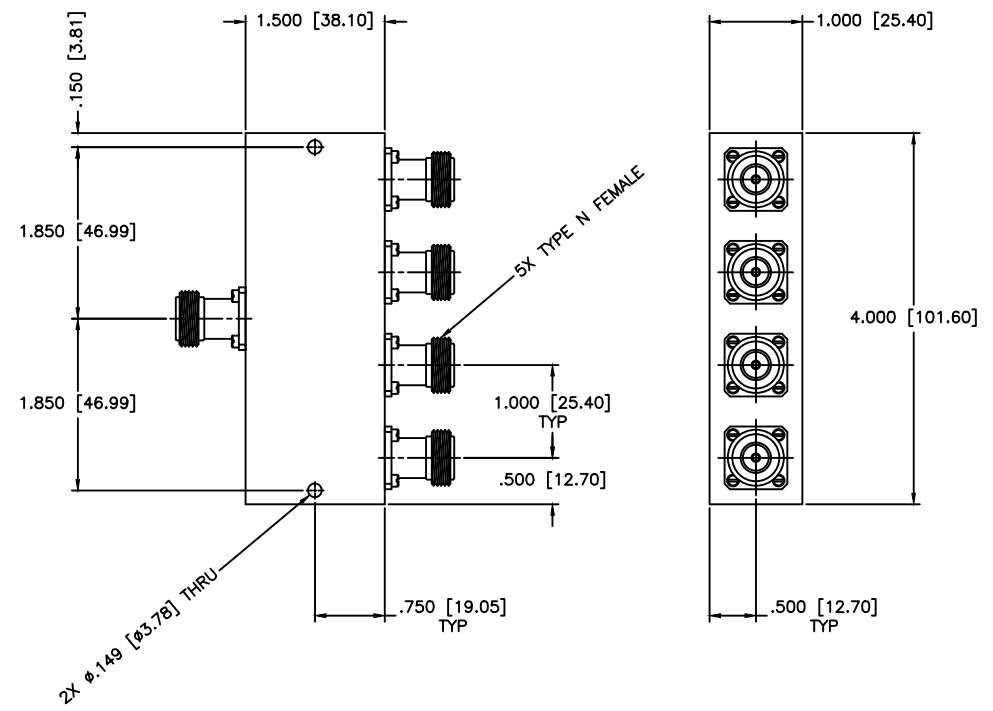

SPECIFICATIONS

Frequency Range: 3.4–4.2 GHz
 Insertion Loss: 0.6dB Max.
 Isolation: 19dB Min.
 VSWR Input/Output: 1.35:1/1.30:1 Max.
 Phase Balance: ±4 Deg. Max.
 Amplitude Balance: ±0.3dB Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM	SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:	4-WAY POWER DIVIDER
DRAWING: Paiboon Luekhamhan DATE: 08-10-1999		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.:	PS4-344/NF
APPROVED: T. Nguyen DATE: 08-10-1999		THIRD ANGLE PROJECTION 	CAGE CODE:	0D2L5
		SIZE:	C	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO.:
				81901

4 | 3 | 2 | 1

D
C
B
A

D
C
B
A