


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

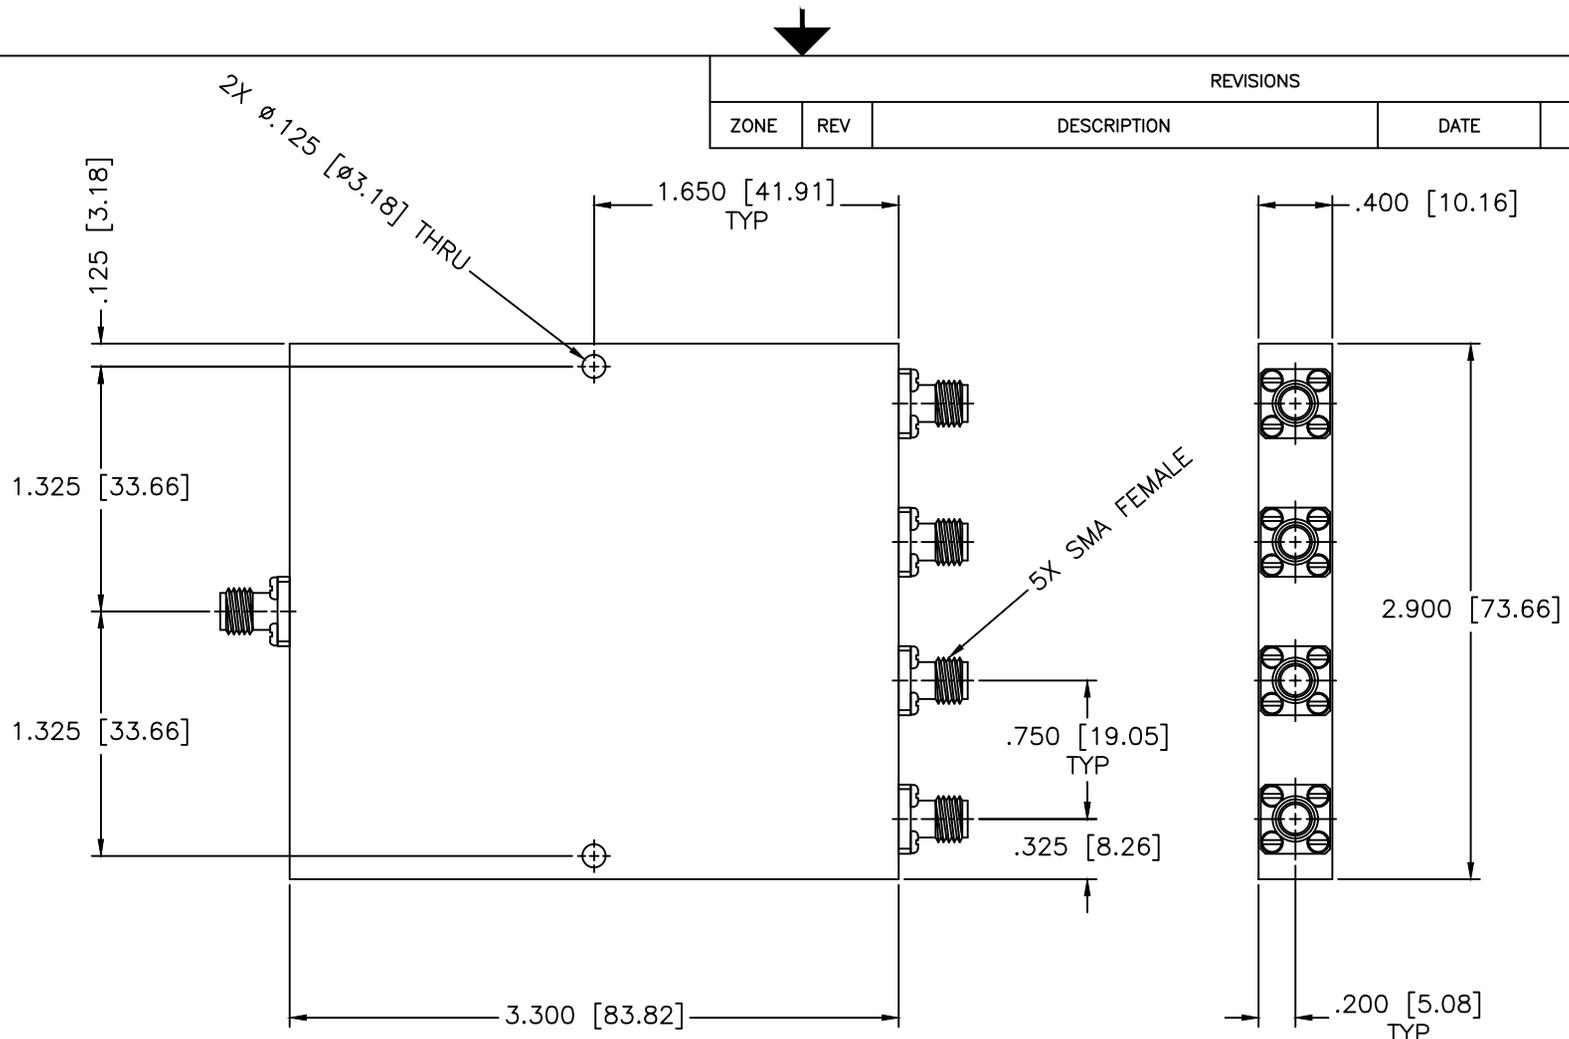

SPECIFICATIONS

Frequency Range: 0.5–2.5 GHz
 Isolation: 20dB Min.
 VSWR In/Out: 1.40:1/1.25:1 Max.
 Insertion Loss: 1.0dB Max.
 Amplitude Balance: ±0.30dB Max.
 Phase Balance: ±4 Deg. Max.
 Power: 30 Watts

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 10-25-1997
APPROVED: T. Nguyen	DATE: 10-25-1997

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 4-WAY POWER DIVIDER		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PS4-4		
THIRD ANGLE PROJECTION	CAGE CODE: 0D2L5	SIZE: A	REV: A
	DO NOT SCALE THE DRAWING		DWG NO. 80178