


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

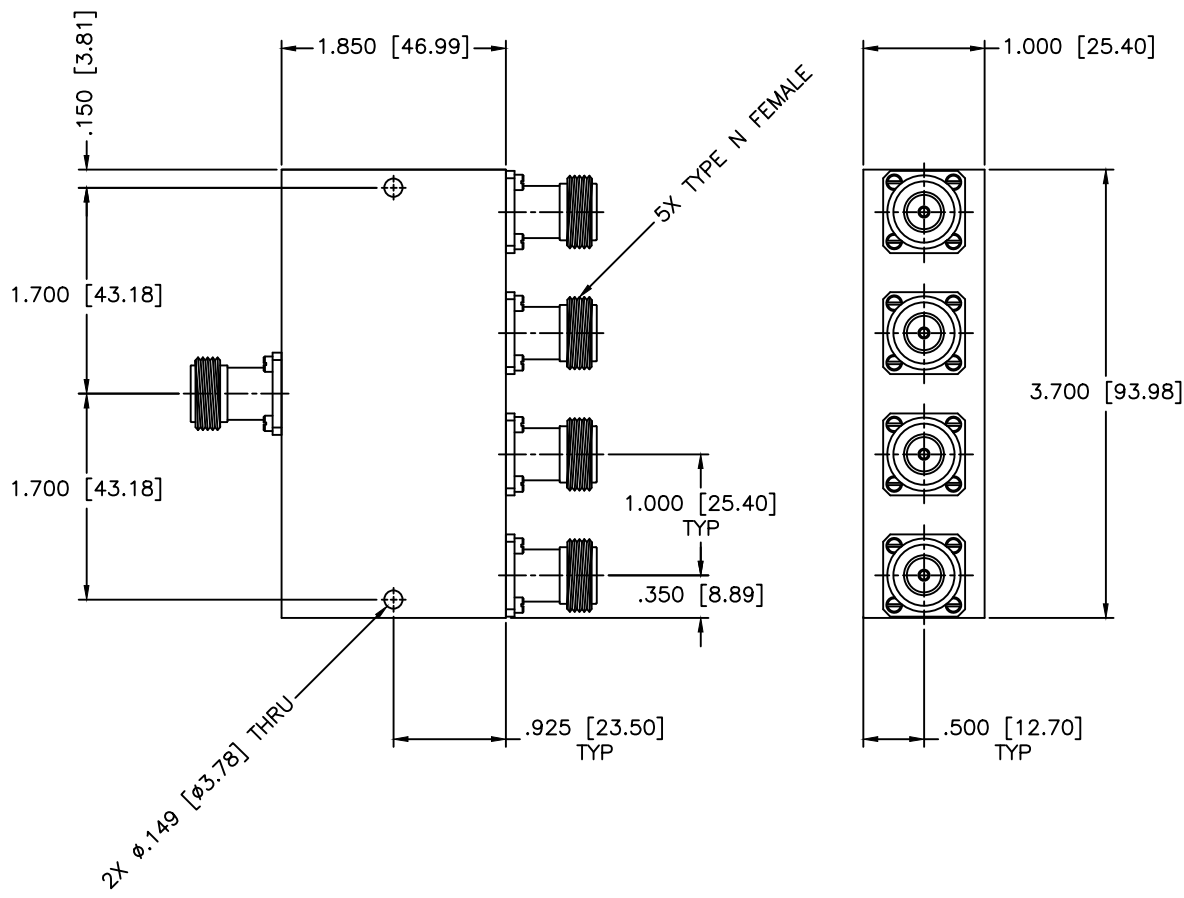

SPECIFICATIONS

Frequency Range: 3.75–5.0 GHz
 Insertion Loss: 0.6dB Max.
 Isolation: 17dB Min.
 VSWR In/Out: 1.40:1/1.20:1 Max.
 Phase Balance: ±6 Deg. Max.
 Amplitude Balance: ±0.3dB Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:		 MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 4-WAY POWER DIVIDER	
DRAWN: Paiboon Luengkhamhan		DATE: 02-28-1998	PART NO. PS4-44/NF	
APPROVED: T. Nguyen		DATE: 02-28-1998	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG. NO. 80955
		THIRD ANGLE PROJECTION	DO NOT SCALE THE DRAWING	