


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

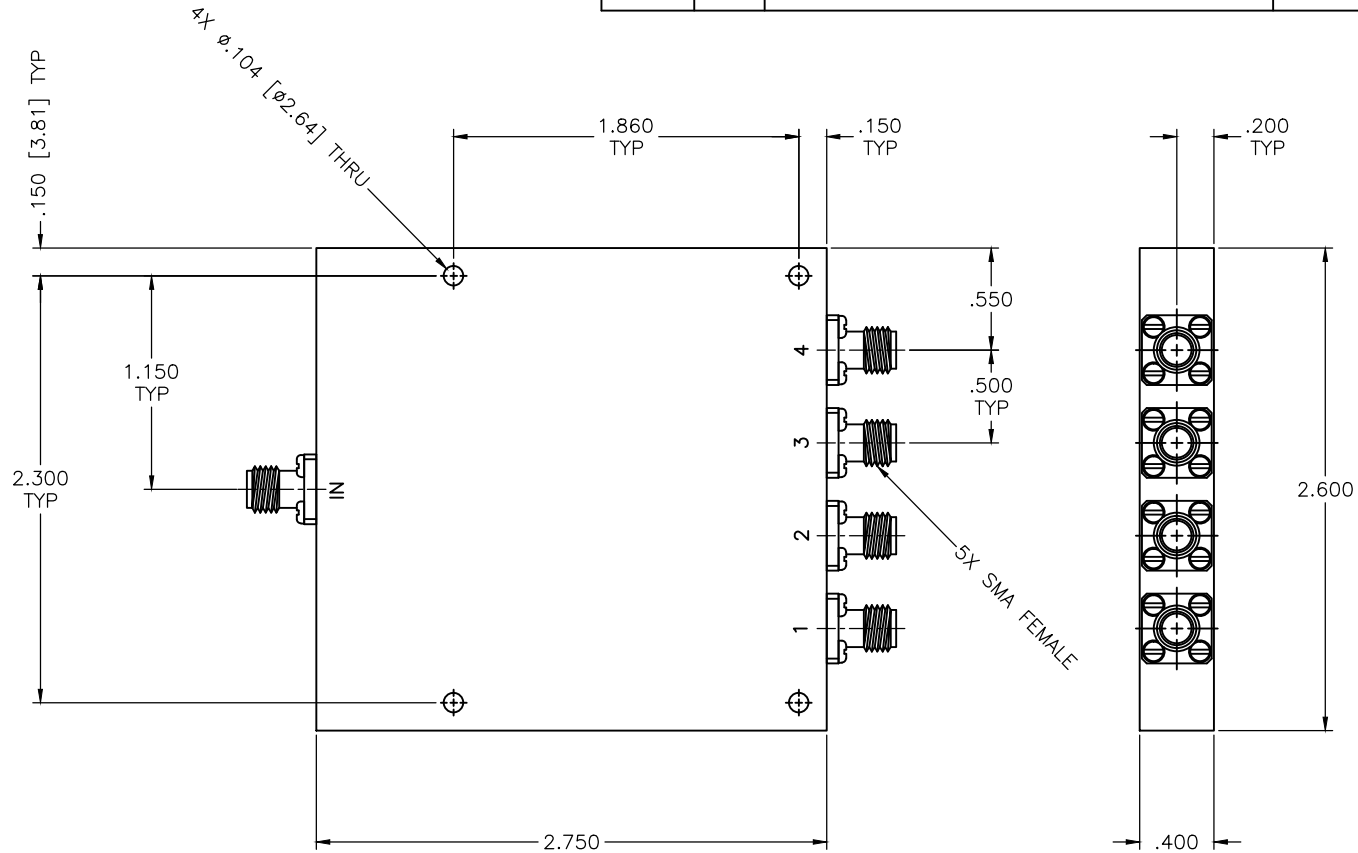

SPECIFICATIONS

Frequency Range: 0.815–0.855 GHz
 Insertion Loss: 1.0dB Max.
 Isolation: 25dB Min.
 VSWR: 1.40:1 Max.
 Amplitude Balance: ± 0.20 dB Max.
 Phase Balance: ± 2 Deg. Max.
 Power: 10W (vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$			DRAWING TITLE:		SHEET:	
DRAWN:		PART NO.		4-WAY POWER DIVIDER		
DATE:		CAGE CODE:		PS4-48		
APPROVED:		SIZE:		DO NOT SCALE THE DRAWING		
T. Nguyen		A		81317		
DATE:		REV:		N/A		
06-16-1999		N/A		DWG NO.		
THIRD ANGLE PROJECTION		OD2L5		81317		