


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

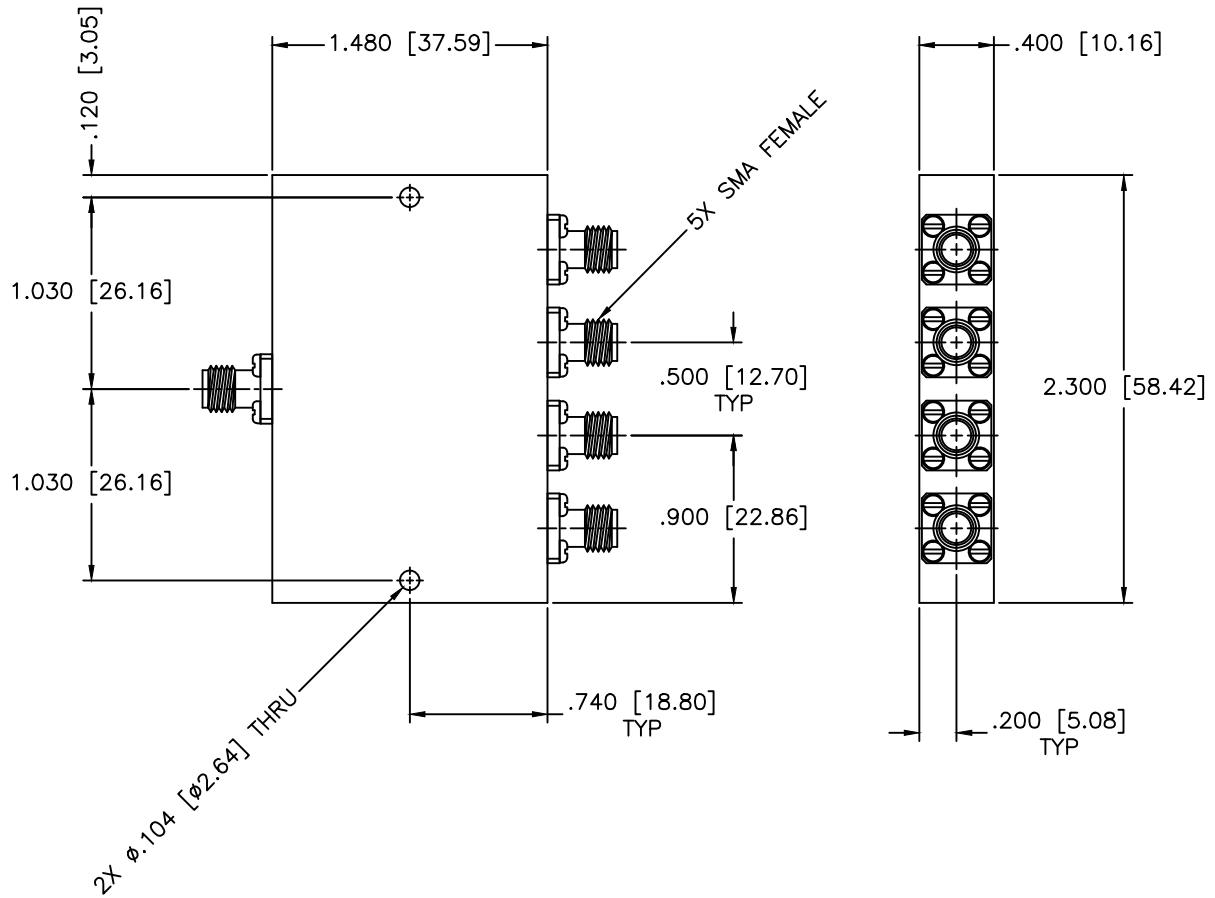

SPECIFICATIONS

- Frequency Range: 2-4 GHz
- Insertion Loss: 0.6dB Max.
- Isolation: 20dB Min.
- VSWR: 1.35:1 Max.
- Amplitude Balance: ±0.3dB Max.
- Phase Balance: ±6 Deg. Max.
- Power: 30 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 4-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PS4-5		
DATE: 06-21-1999	DATE: 06-21-1999	CAGE CODE: OD2L5	SIZE: A	REV: N/A
APPROVED: T. Nguyen	DATE: 06-21-1999	DO NOT SCALE THE DRAWING		DWG NO. 80177