


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

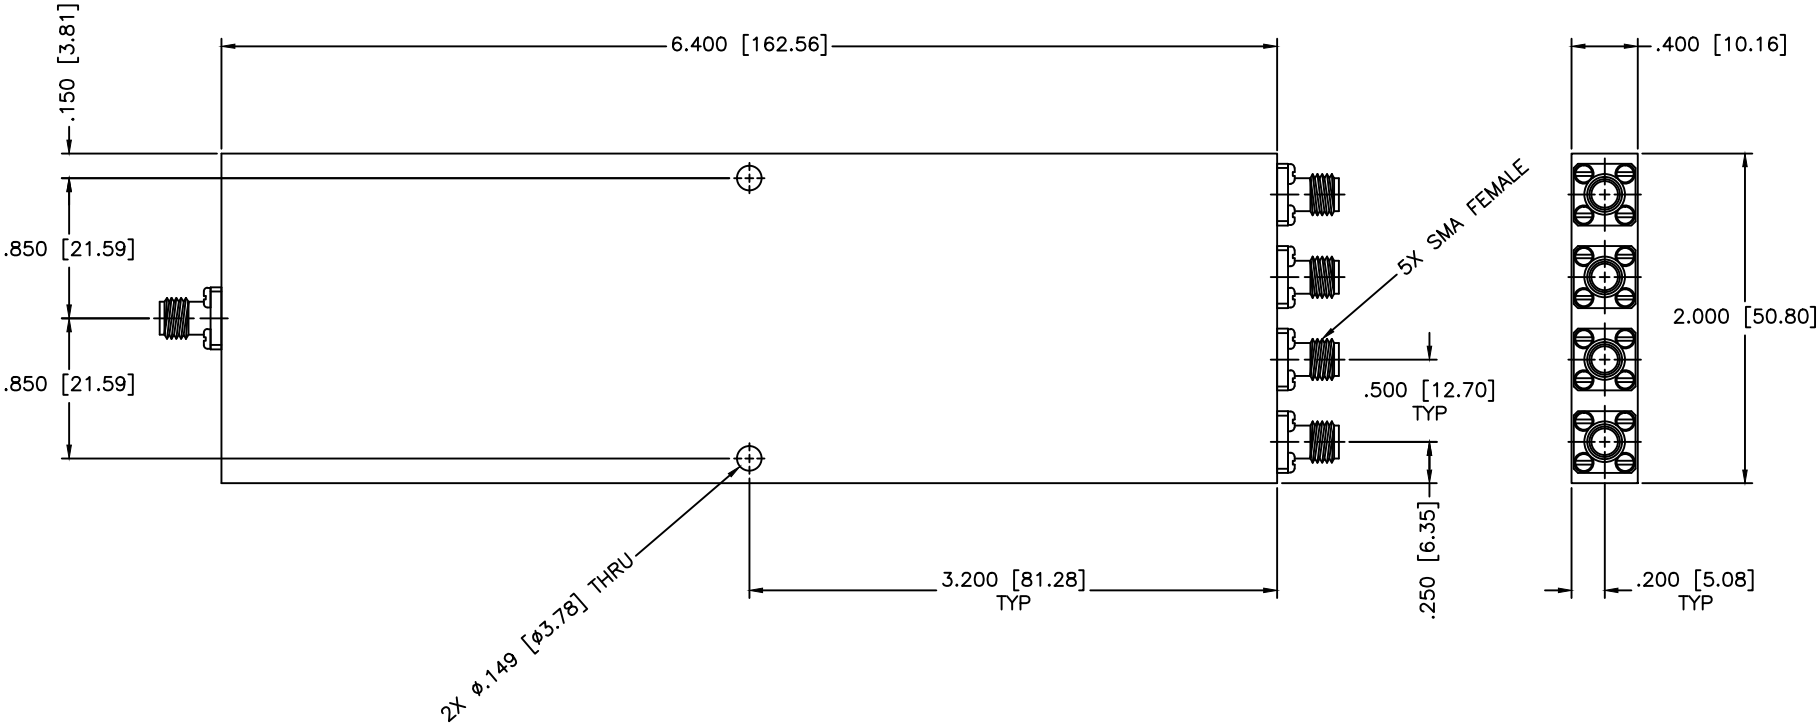

SPECIFICATIONS

Frequency Range: 1-4 GHz
 Insertion Loss: 0.6dB Max.
 Isolation: 18dB Min.
 VSWR Input/Output: 1:35:1/1.25:1Max.
 Amplitude Balance: ±0.3dB Max.
 Phase Balance: ±6 Deg. Max.
 Power: 10W (Load VSWR @1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 06-29-1999
APPROVED: T. Nguyen	DATE: 06-29-1999

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
	SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 4-WAY POWER DIVIDER	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: PS4-51	
THIRD ANGLE PROJECTION	CAGE CODE:	DWG NO.:
	SIZE: N/A REV: N/A	80936
	DO NOT SCALE THE DRAWING	