


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

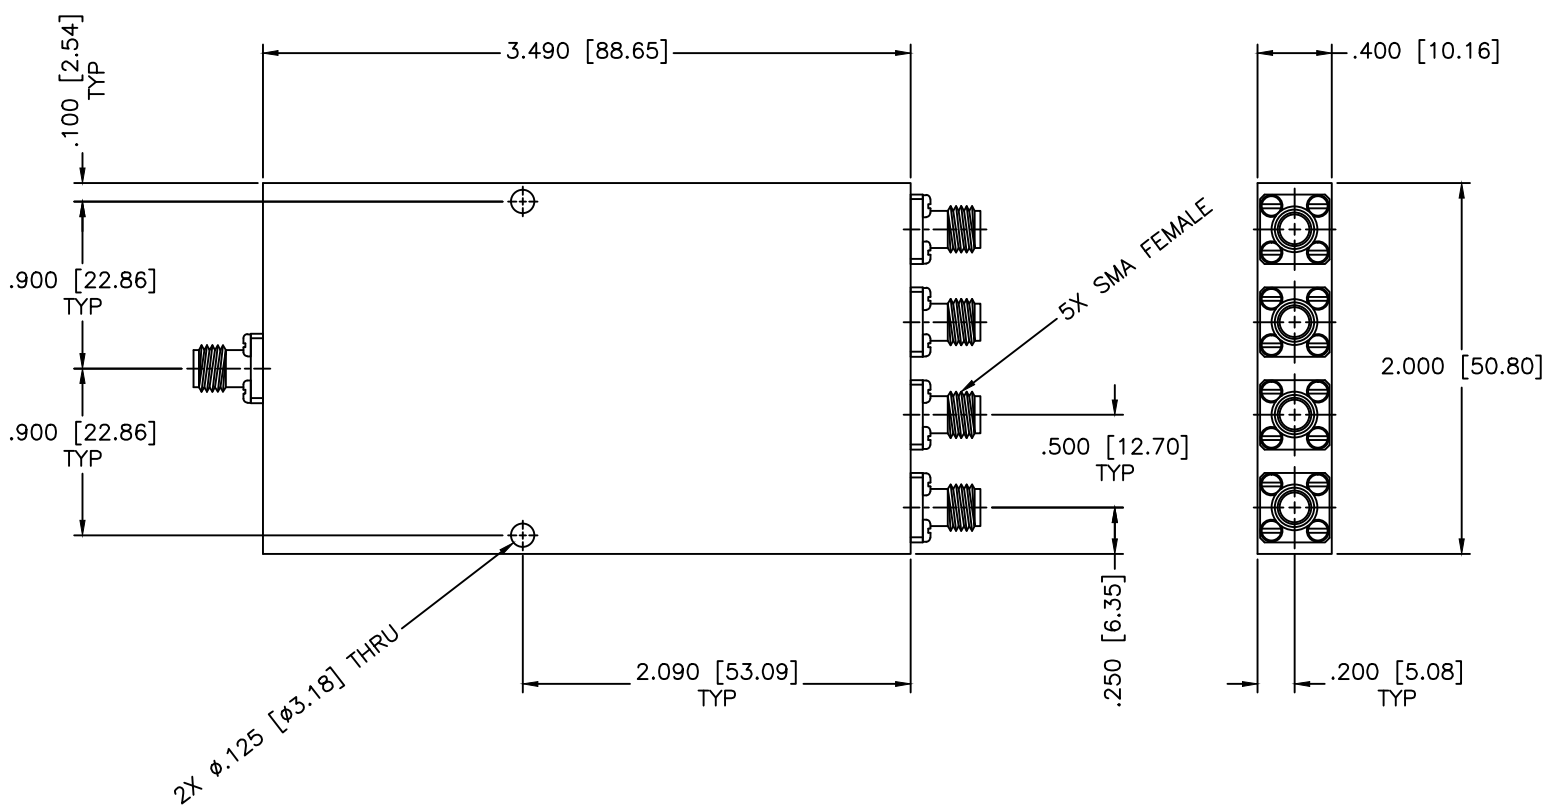

SPECIFICATIONS

Frequency Range: 0.85–3.7 GHz
 Insertion Loss: 1.8dB Max.
 Isolation: 18dB Min.
 VSWR Input/Output: 1:35:1/1.25:1 Max.
 Amplitude Balance: ±0.3dB Max.
 Phase Balance: ±6 Deg. Max.
 Power: 20W (Load VSWR @1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWING TITLE:		4-WAY POWER DIVIDER		PART NO.		
DRAWN:		Paiboon Luekhamhan		DATE:		
DATE:		07-18-2007		DRAWING TITLE:		
APPROVED:		T. Nguyen		DATE:		
DATE:		07-18-2007		DRAWING TITLE:		
CAGE CODE:		OD2L5		PART NO.:		
SIZE:		A		REV:		
REV:		N/A		DWG NO.:		
DO NOT SCALE THE DRAWING		81338		THIRD ANGLE PROJECTION		