


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

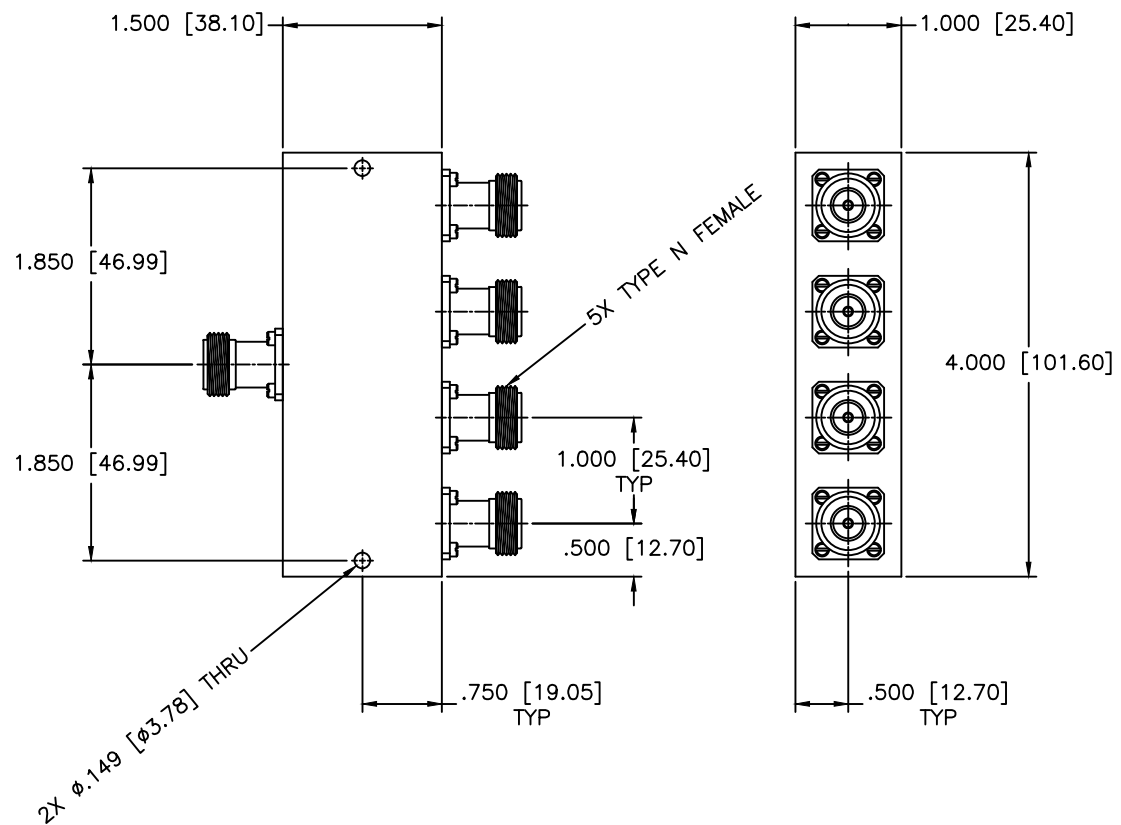

**SPECIFICATIONS**

Frequency Range: 2-4 GHz  
 Isolation: 18dB Min.  
 VSWR: 1.40:1 Max.  
 Insertion Loss: 0.6dB Max.  
 Amplitude Balance: ±0.3dB Max.  
 Phase Balance: ±6 Deg. Max.  
 Average Power: 30 Watts

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		SHEET:		N/A
DRAWN:		DATE:		DRAWING TITLE:			A
Paiboon Luengkhamhan		10-26-1998		4-WAY POWER DIVIDER			
APPROVED:		DATE:		PART NO.			A
T. Nguyen		10-26-1998		PS4-5/NF			
THIRD ANGLE PROJECTION		CAGE CODE:		SIZE:		DWG NO.	
		OD2L5		N/A			80194
				REV: N/A			
				DO NOT SCALE THE DRAWING			