


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

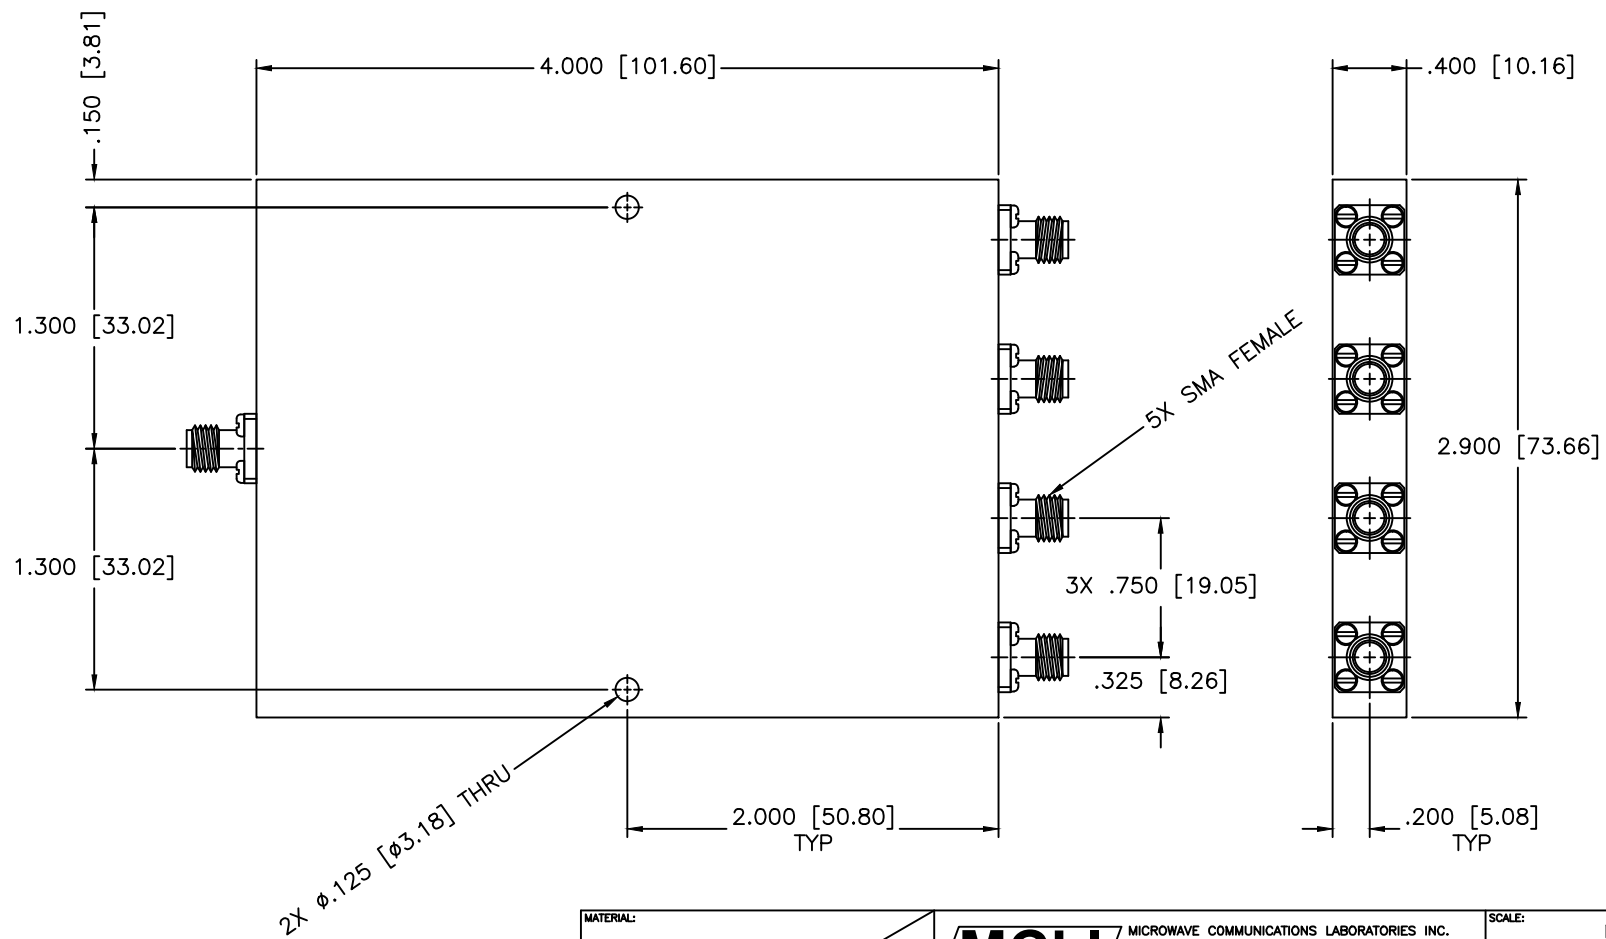

SPECIFICATIONS

Frequency Range: 0.55–1.28 MHz
 Insertion Loss: 0.3dB Max.
 Isolation: 20dB Min.
 VSWR Input/Output: 1.45:1/1.20:1 Max.
 Amplitude Balance: ±0.30dB Max.
 Phase Balance: ±4 Deg. Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
					SHEET: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 4-WAY POWER DIVIDER		
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PS4-62		
DRAWN: Paiboon Luekhamhan	DATE: 02-27-1998		CAGE CODE:	SIZE: A	REV: N/A
APPROVED: T. Nguyen	DATE: 02-27-1998		OD2L5	DO NOT SCALE THE DRAWING	