


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

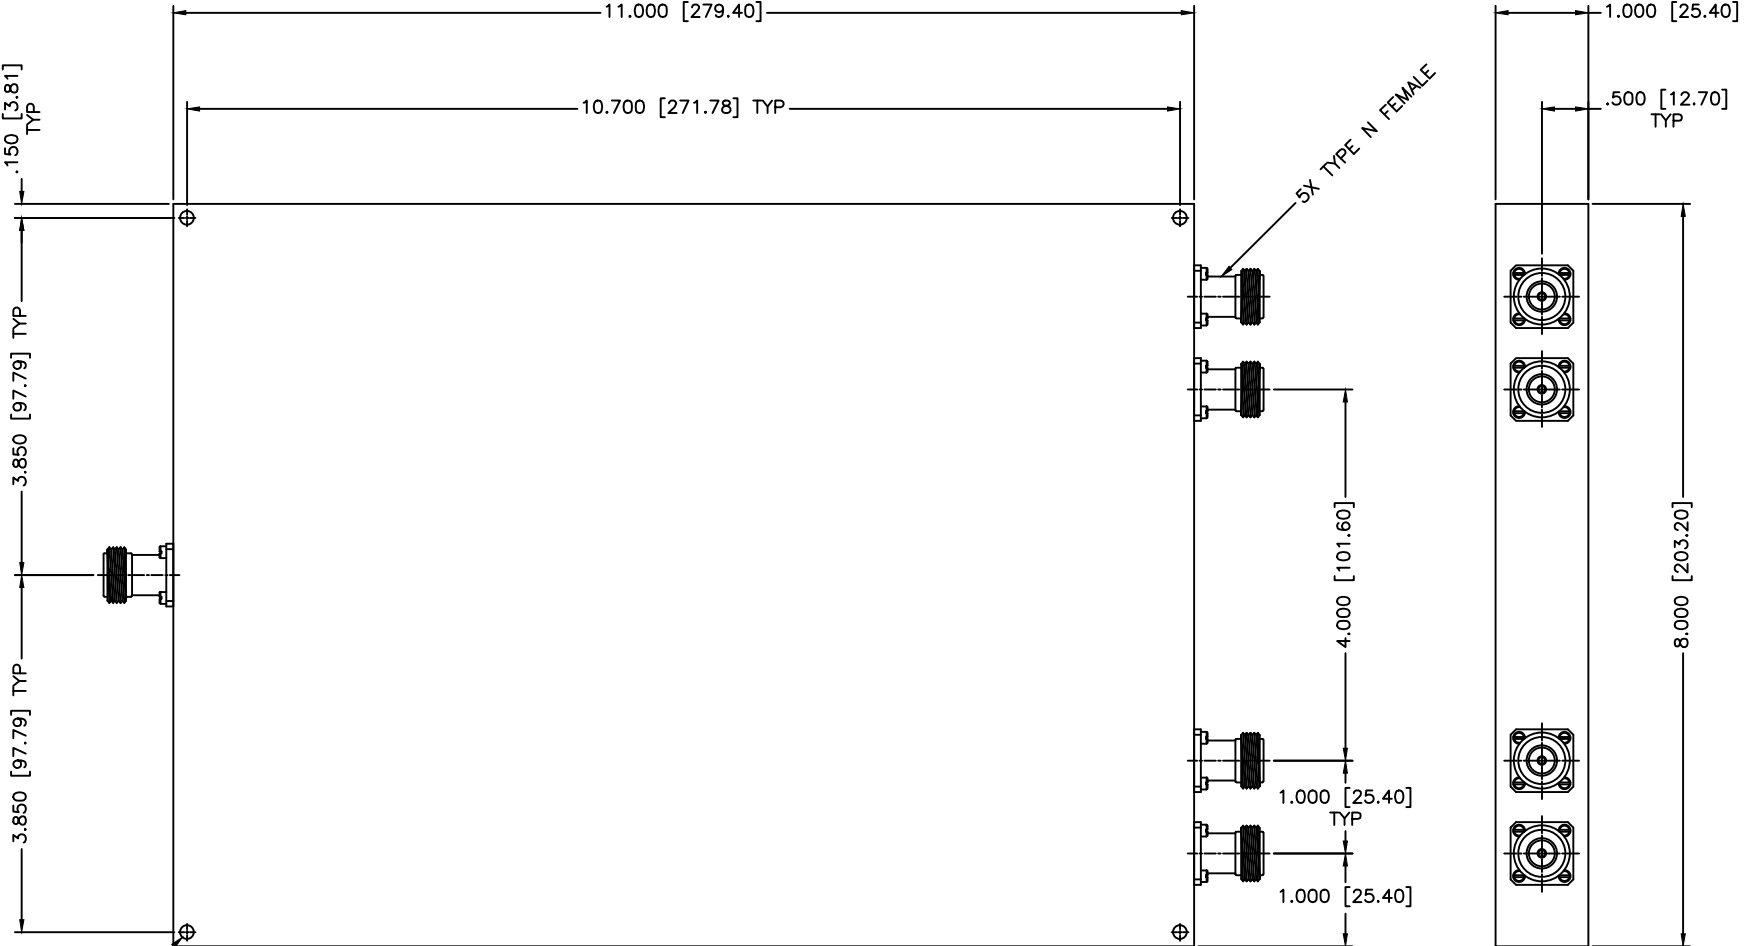

SPECIFICATIONS

Frequency Range: 0.1–0.4 GHz
 Insertion Loss: 0.6dB Max.
 Isolation: 19dB Min.
 VSWR In/Out: 1.40:1/1.25:1 Max.
 Power Rating: 20W CW
 Amplitude Balance: ±0.5dB Max.
 Phase Balance: ±10 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		SHEET:	
DRAWING: Paiboon Luekhamhan		DATE: 03-01-1998		DRAWING TITLE:		4-WAY POWER DIVIDER
APPROVED: T. Nguyen		DATE: 03-01-1998		PART NO.:		PS4-69/NF
THIRD ANGLE PROJECTION		CAGE CODE:		SIZE:	REV:	DWG NO.:
		OD2L5		C	N/A	80965
DO NOT SCALE THE DRAWING						