


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

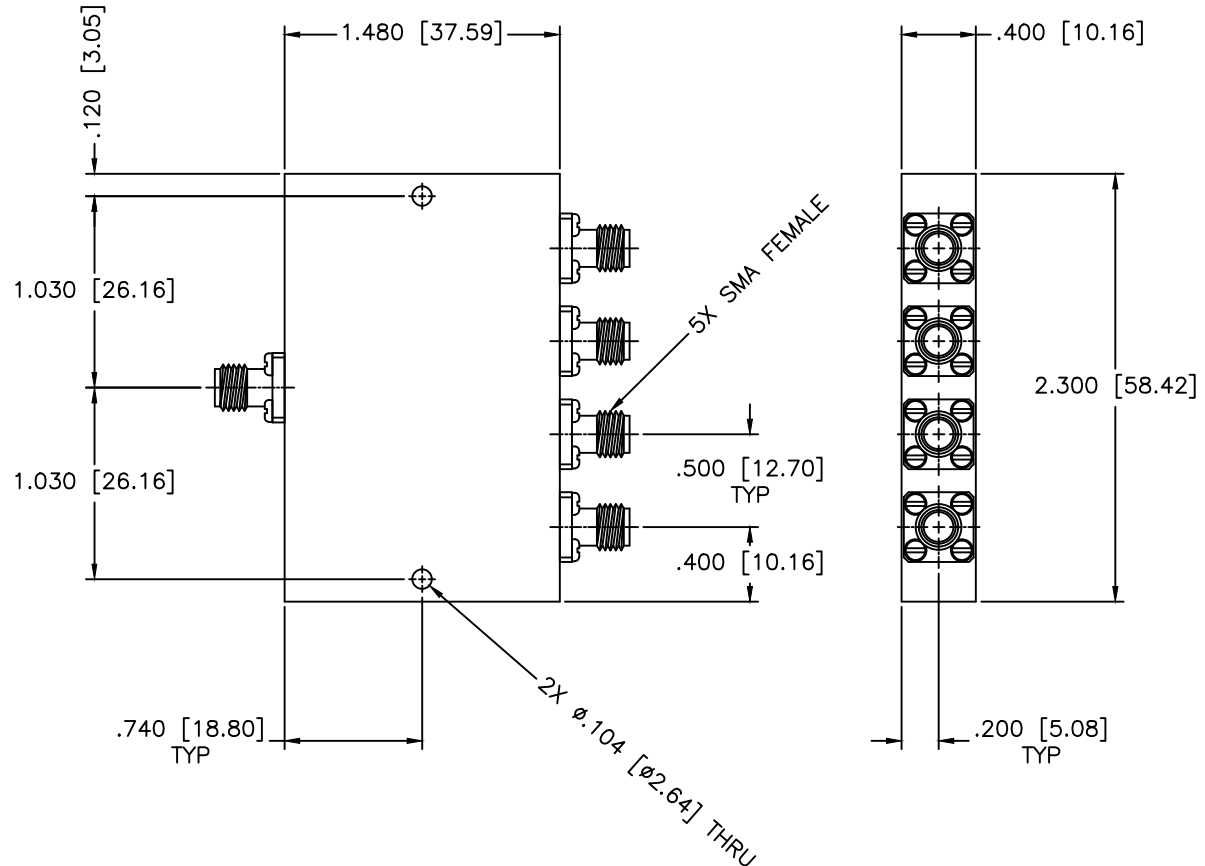

SPECIFICATIONS

Frequency Range: 2.7–2.9 GHz
 VSWR: 1.45:1 Max.
 Amplitude Balance: ±0.3dB Max.
 Phase Balance: ±4 Deg. Max.
 Insertion Loss: 1.2dB Max.
 Isolation: 18dB Min.
 Power Rating: 30W (VSWR @ 1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 06-21-1999
APPROVED: T. Nguyen	DATE: 06-21-1999



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 544-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ± .01 ± .005
 ANGLE: ± 1/2°

DRAWING TITLE:
4-WAY POWER DIVIDER

PART NO.
PS4-74

THIRD ANGLE PROJECTION

CAGE CODE:
OD2L5

SIZE: **A** REV: **N/A**
 DO NOT SCALE THE DRAWING

DWG NO.
80100