


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

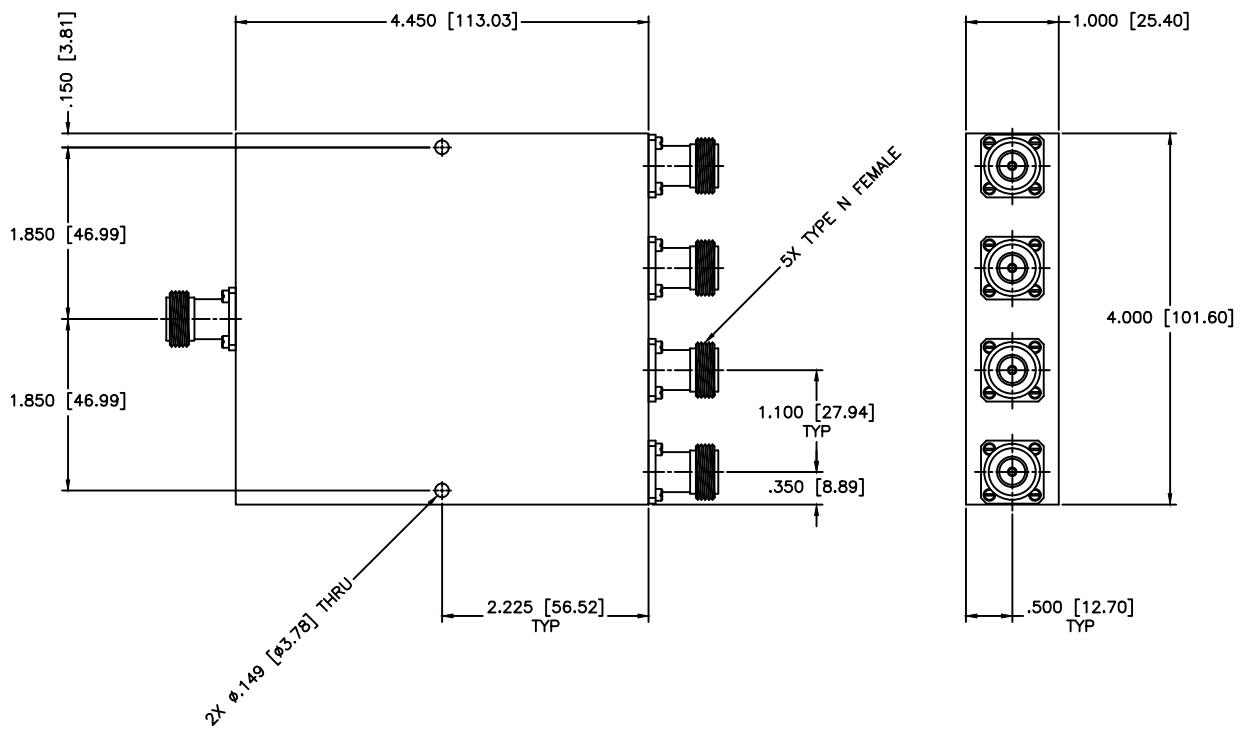

SPECIFICATIONS

Frequency Range: 2–8 GHz
 Isolation: 17dB Min.
 Insertion Loss: 1.2dB Max.
 Amplitude Balance: ±0.4dB Max.
 VSWR In/Out: 1.50:1/1.40:1 Max.
 Phase Balance: ±7 Deg. Max.
 Power Rating: 20W (vswr@1.2)
 Storage Temperature Range: -65°C to +125°C
 Operating Temperature Range: -55°C to +95°C

MATERIAL:		 MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWING TITLE:		4-WAY POWER DIVIDER		
PART NO.:		PS4-7/NF		
DRAWING:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE:
Paiboon Luekhamhan	07-23-1999		OD2L5	C
APPROVED:	DATE:	THIRD ANGLE PROJECTION	DWG NO.:	
T. Nguyen	07-23-19992		80196	
			DO NOT SCALE THE DRAWING	