


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

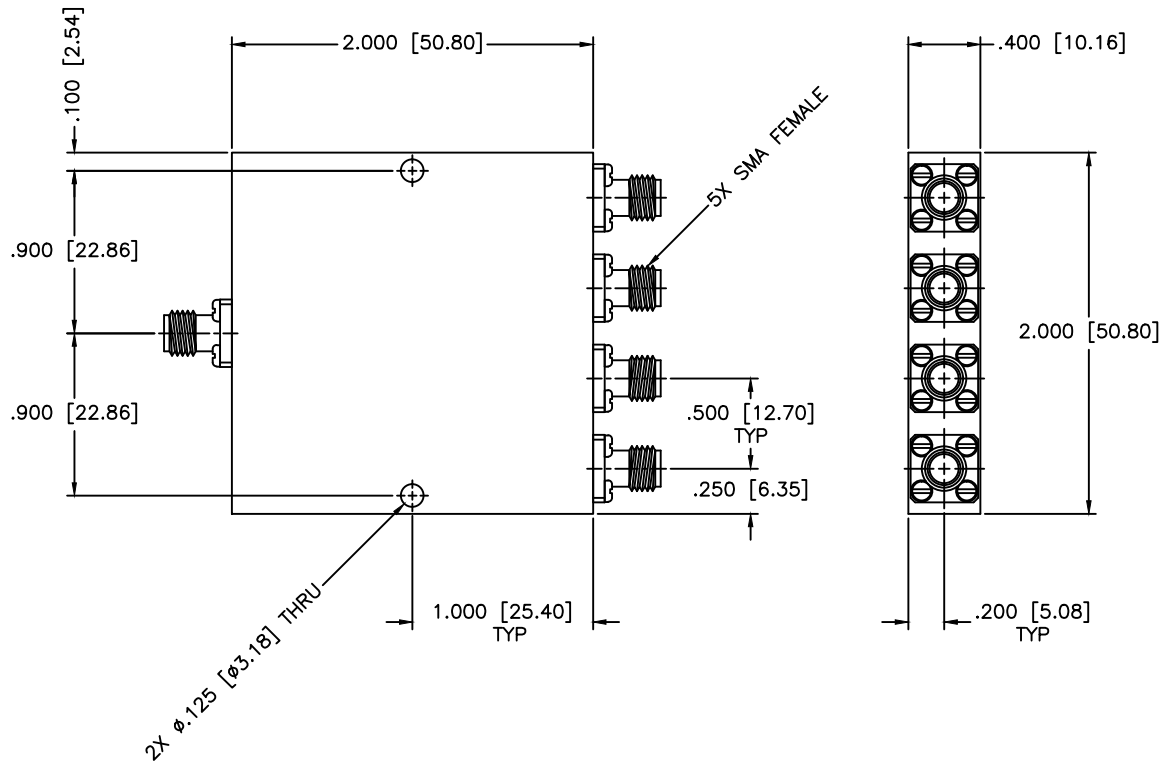

SPECIFICATIONS

Frequency Range: 18.1–18.6 GHz
 VSWR: 1.80:1 Max.
 Amplitude Balance: ±0.75dB Max.
 Phase Balance: ±8 Deg. Max.
 Insertion Loss: 1.9dB Max.
 Isolation: 15dB Min.
 Power Rating: 20W Avg, 3kW Peak
 Operating Temperature: -55°C to +85°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 05-18-1998
APPROVED: T. Nguyen	DATE: 05-18-1998



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE: 4-WAY POWER DIVIDER			
PART NO. PS4-84			
CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 82052
DO NOT SCALE THE DRAWING			

PROCEDURE NOTE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION