


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

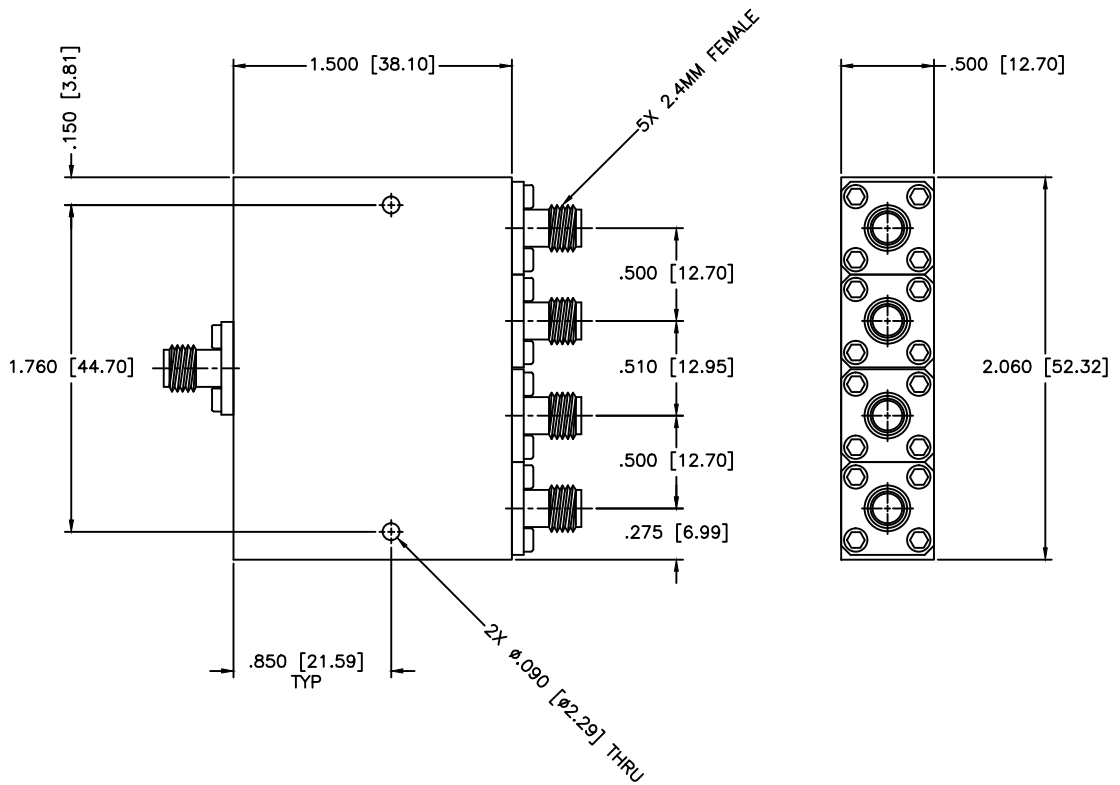

**SPECIFICATIONS**

Frequency Range: 18–50 GHz  
 VSWR: 1.70:1 Max.  
 Amplitude Balance: ±0.6dB Max.  
 Phase Balance: ±6 Deg. Max.  
 Insertion Loss: 2.6dB Max.  
 Isolation: 16dB Min.  
 Power Rating: 20W Avg, 3kW Peak

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°	DRAWING TITLE:		SHEET:
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.		4-WAY POWER DIVIDER	
DRAWN:	DATE:	THIRD ANGLE PROJECTION 	CAGE CODE:		SIZE:	REV:
APPROVED:	DATE:		OD2L5		A	B
				DO NOT SCALE THE DRAWING		85681