REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

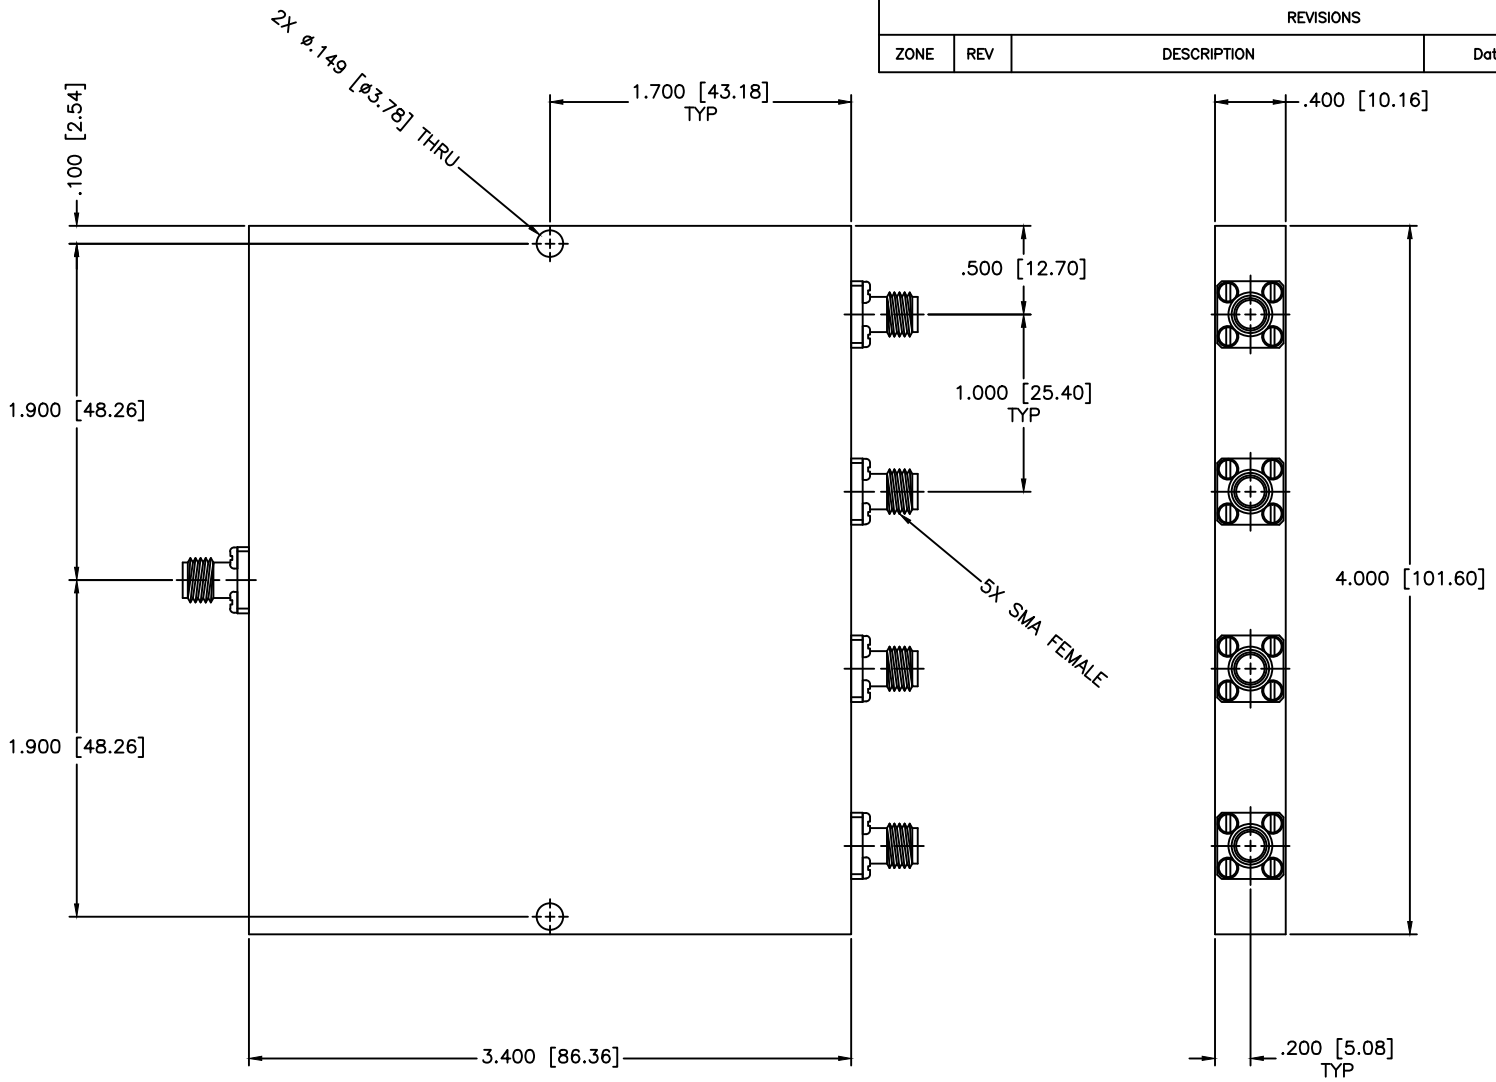

SPECIFICATIONS

Frequency Range: 0.34–0.4 GHz
Insertion Loss: 1.0dB Max.
Isolation: 22dB Min.
VSWR: 1.50:1 Max.
Amplitude Balance: ±0.8dB Max.
Phase Balance: ±9 Deg. Max.
Power: 30W (Load VSWR @1.2)

MATERIAL:

MCLI
MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344–6254 FAX: (727) 381–6116
hhtp://WWW.MCLI.COM

SCALE: N/A
SHEET: N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

DRAWING TITLE: 4–WAY POWER DIVIDER

PART NO. PS4–95

DRAWN: Paiboon Luekhamhan DATE: 08–12–2009

APPROVED: T. Nguyen DATE: 08–12–2009

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

CAGE CODE: 0D2L5
SIZE: A
REV: N/A
DO NOT SCALE THE DRAWING
DWG NO. 84577