


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

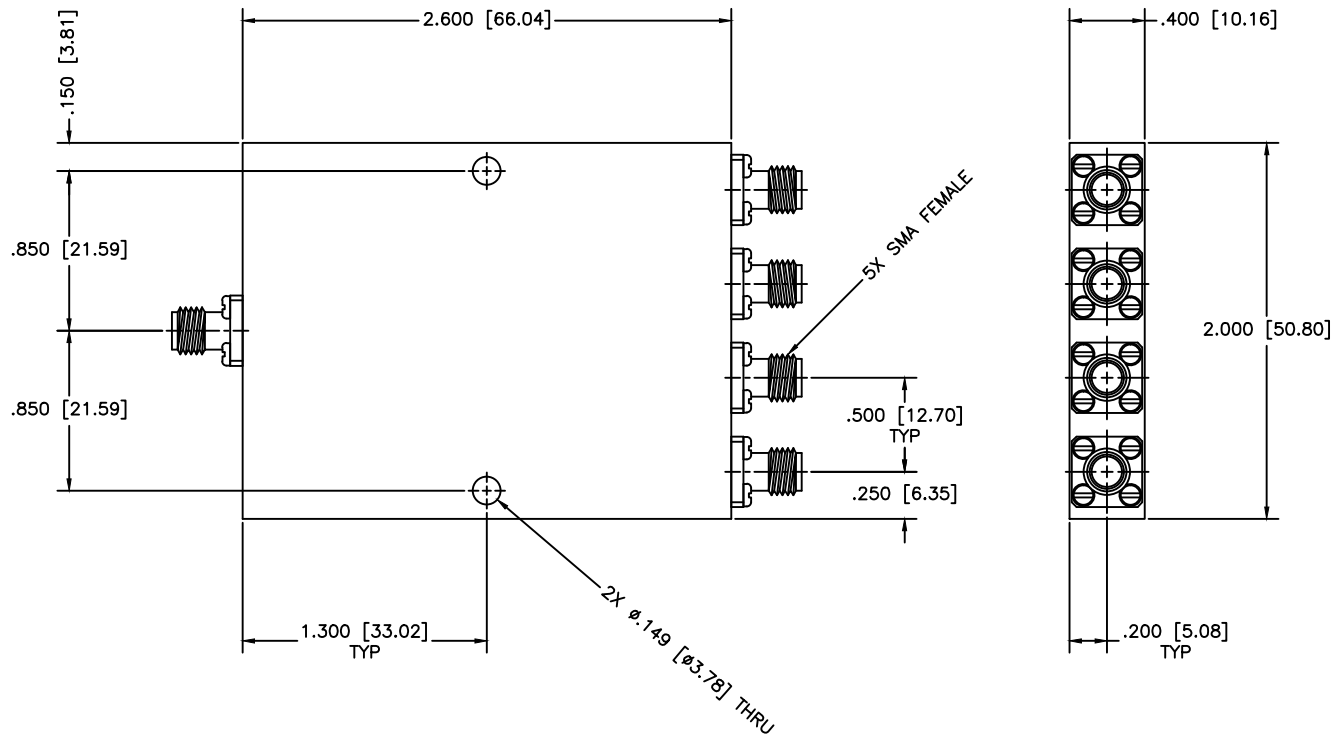

SPECIFICATIONS

Frequency Range: 1.5–3 GHz
 VSWR In/Out: 1.50:1/1.45:1 Max.
 Amplitude Balance: ± 0.3 dB Max.
 Phase Balance: ± 5 Deg. Max.
 Insertion Loss: 0.9dB Max.
 Isolation: 16dB Min.
 Power Rating: 30W (VSWR @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 03-27-2002		DRAWING TITLE: 4-WAY POWER DIVIDER	
APPROVED: T. Nguyen		DATE: 03-27-2002		PART NO. PS4-96	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	SIZE: A
				REV: N/A	DWG NO. 81929
				DO NOT SCALE THE DRAWING	