


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

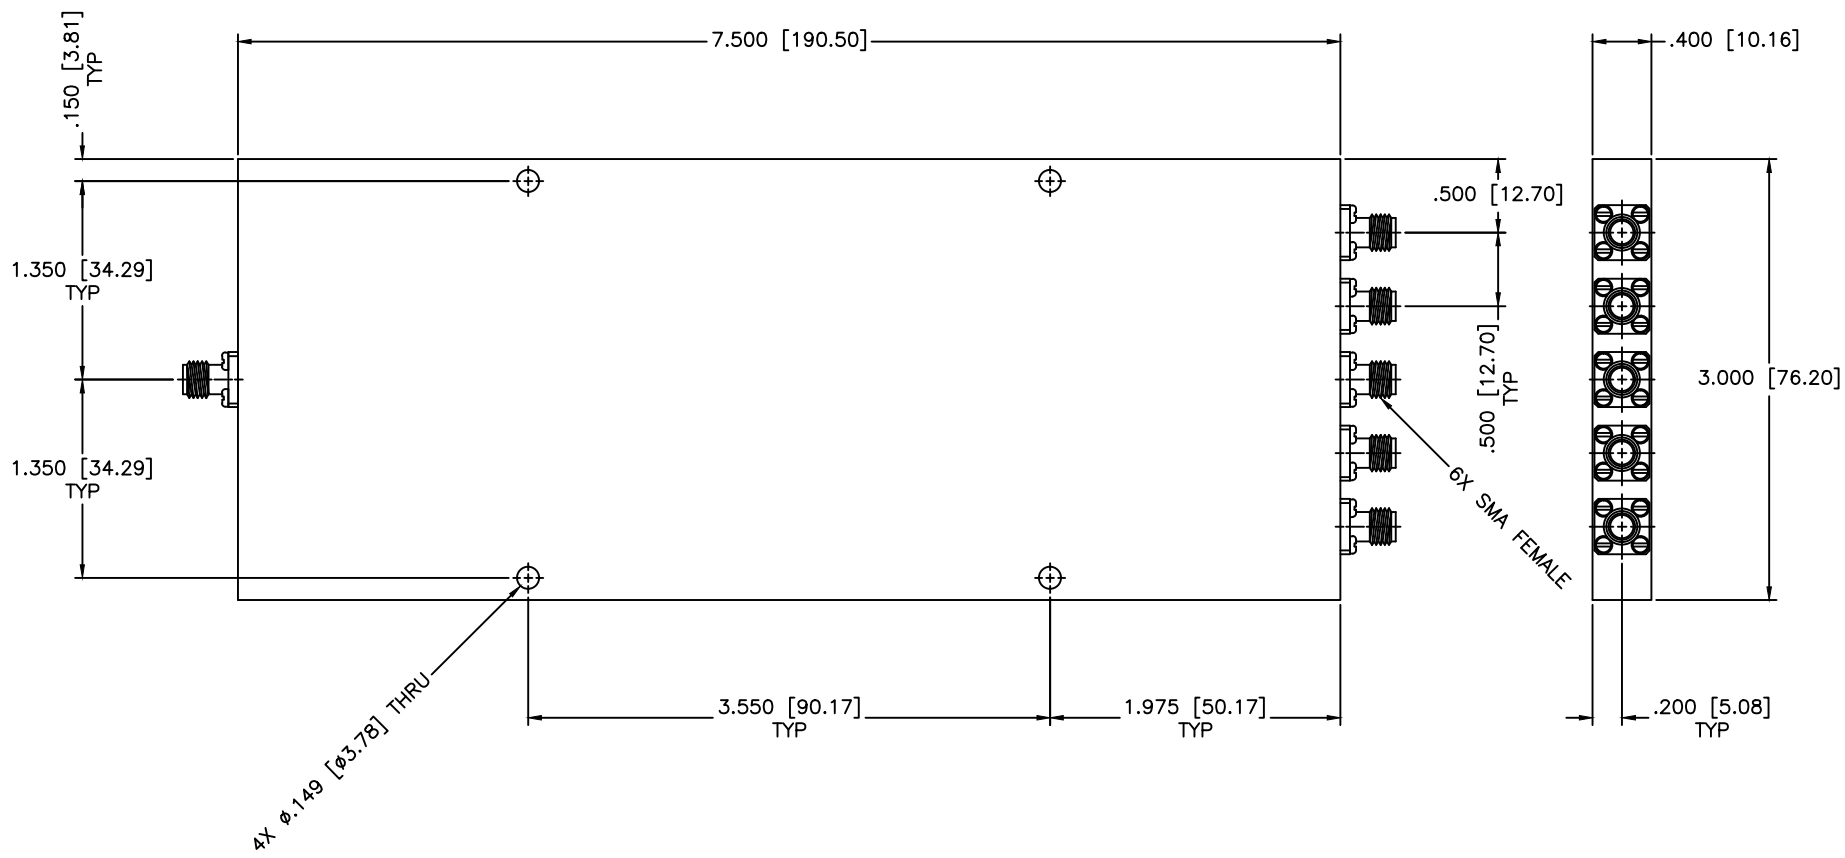

4x ϕ .149 [3.78] THRU

SPECIFICATIONS

Frequency Range: 1–3 GHz
 Insertion Loss: 2.3dB Max.
 Isolation: 16dB Min.
 VSWR: 1.65:1 Max.
 Amplitude Balance: \pm 1.3dB Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:	
DRAWN:	DATE:
Paiboon Luekhamhan	09-30-2008
APPROVED:	DATE:
T. Nguyen	09-30-2008



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: \pm 1/64
 DECIMALS: \pm .01 \pm .005
 ANGLE: \pm 1/2°

DRAWING TITLE:
5-WAY POWER DIVIDER

PART NO.
PS5-23

THIRD ANGLE PROJECTION

CAGE CODE:	SIZE:	REV:	DWG. NO.
OD2L5	N/A	N/A	83924
DO NOT SCALE THE DRAWING			