


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

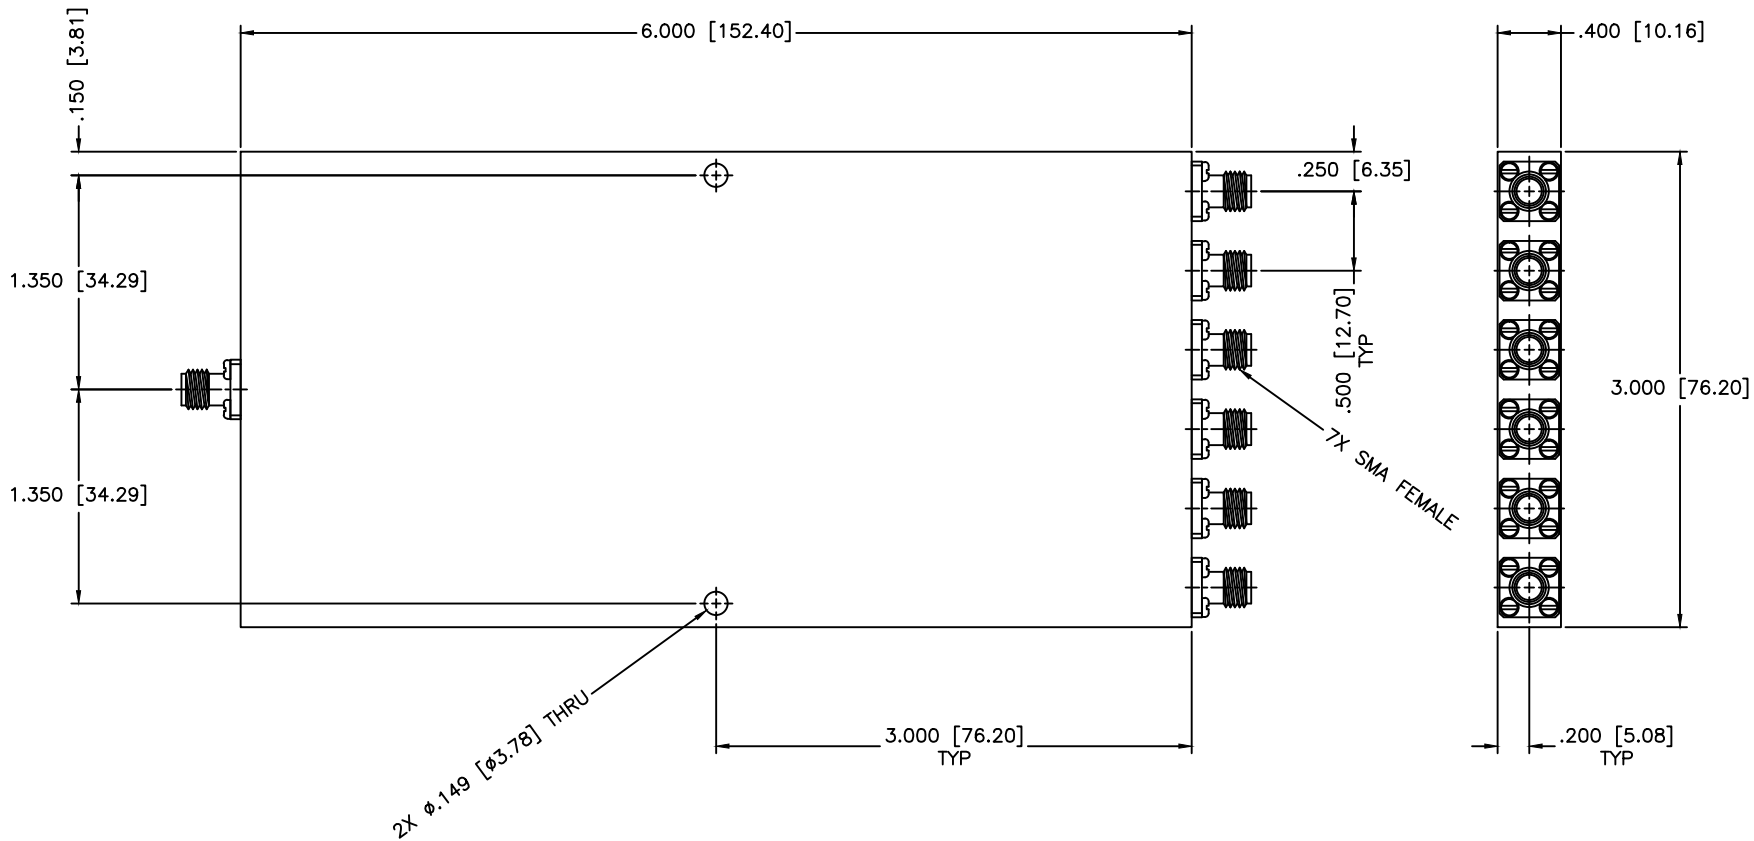

**SPECIFICATIONS**

Frequency Range: 0.65–3 GHz  
 Insertion Loss: 2.5dB Max.  
 Isolation: 15dB Min.  
 Phase Balance: ±12 Deg. Max.  
 Amplitude Balance: ±1.9dB Max.  
 VSWR IN/OUT: 1.75:1/1.70:1 Max.  
 Input Power: 20W (Load vswr @ 1.2)

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 361-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE:	N/A
			PART NO.	PS6-109
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 6-WAYS POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		
DATE: 06-06-2003		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		SIZE: N/A		REV: N/A
DATE: 06-06-2003		DWG NO.: 81990		DO NOT SCALE THE DRAWING