
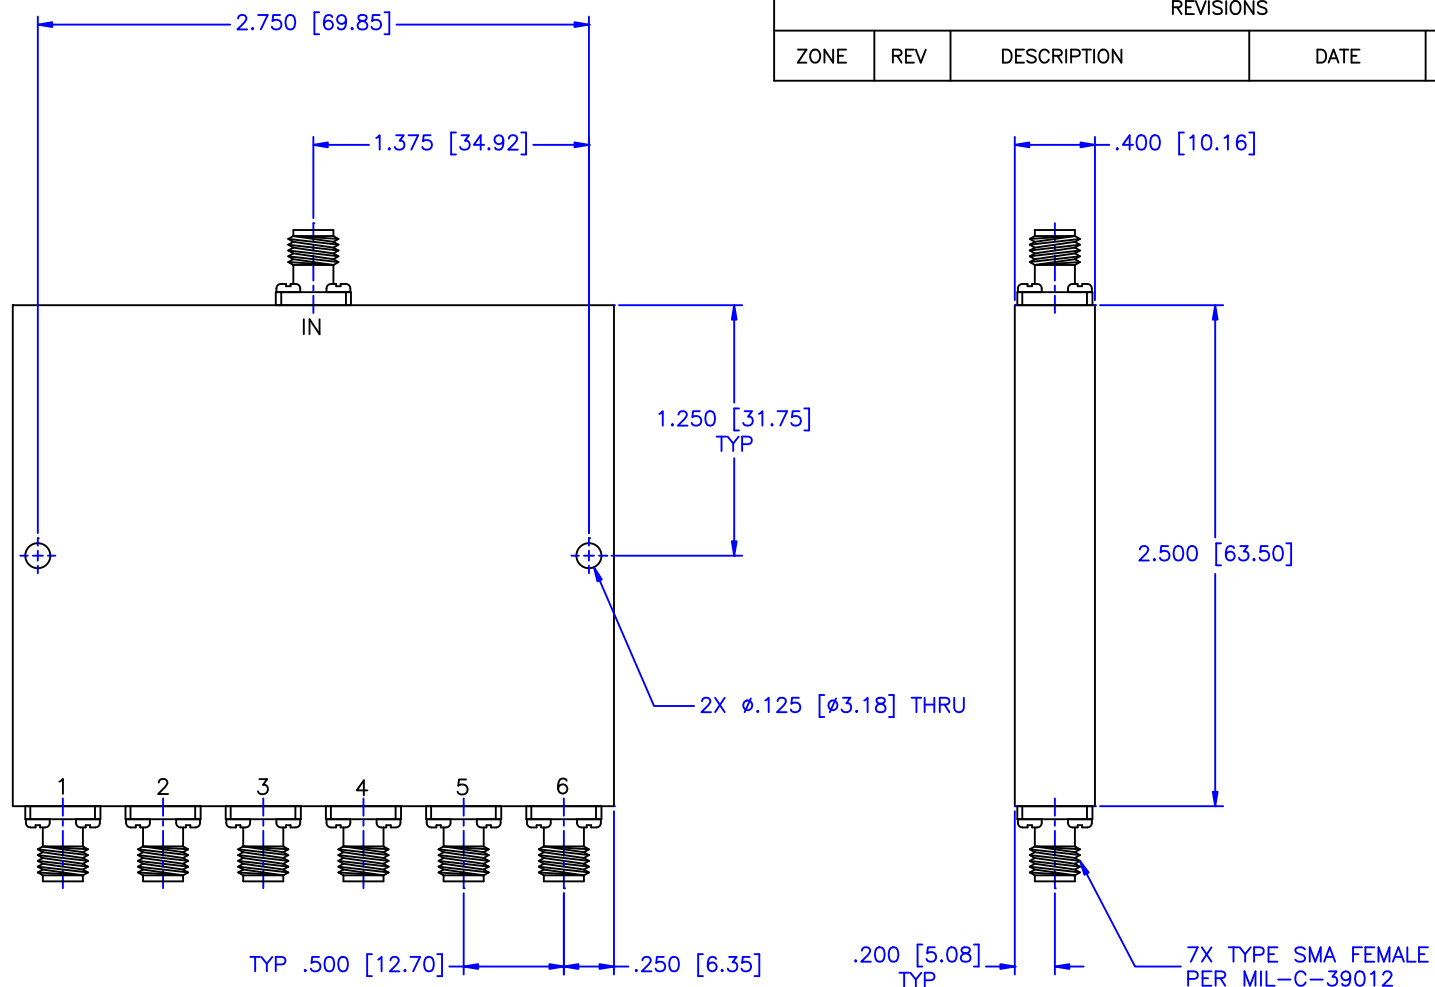




REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

ELECTRICAL SPECIFICATIONS:

Frequency Range:	18.0 to 26.5 GHz
Insertion Loss Maximum:	5.0 dB
Isolation Minimum:	11 dB
VSWR Input Maximum:	2.00:1
VSWR Output Maximum:	2.00:1
Phase Balance Max:	N/A
Amplitude Balance Max:	±1.25 dB
Average Power:	20 Watts

		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 6-WAY POWER DIVIDER	
		DRAWN: Paiboon Luekhamhan		DATE: 02-05-2002	
APPROVED: T. Nguyen		DATE: 02-05-2002		PS6-12	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	
		THIRD ANGLE PROJECTION 		SIZE: A	
				REV: N/A	
				DWG NO.	
				81913	
				DO NOT SCALE THE DRAWING	