


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

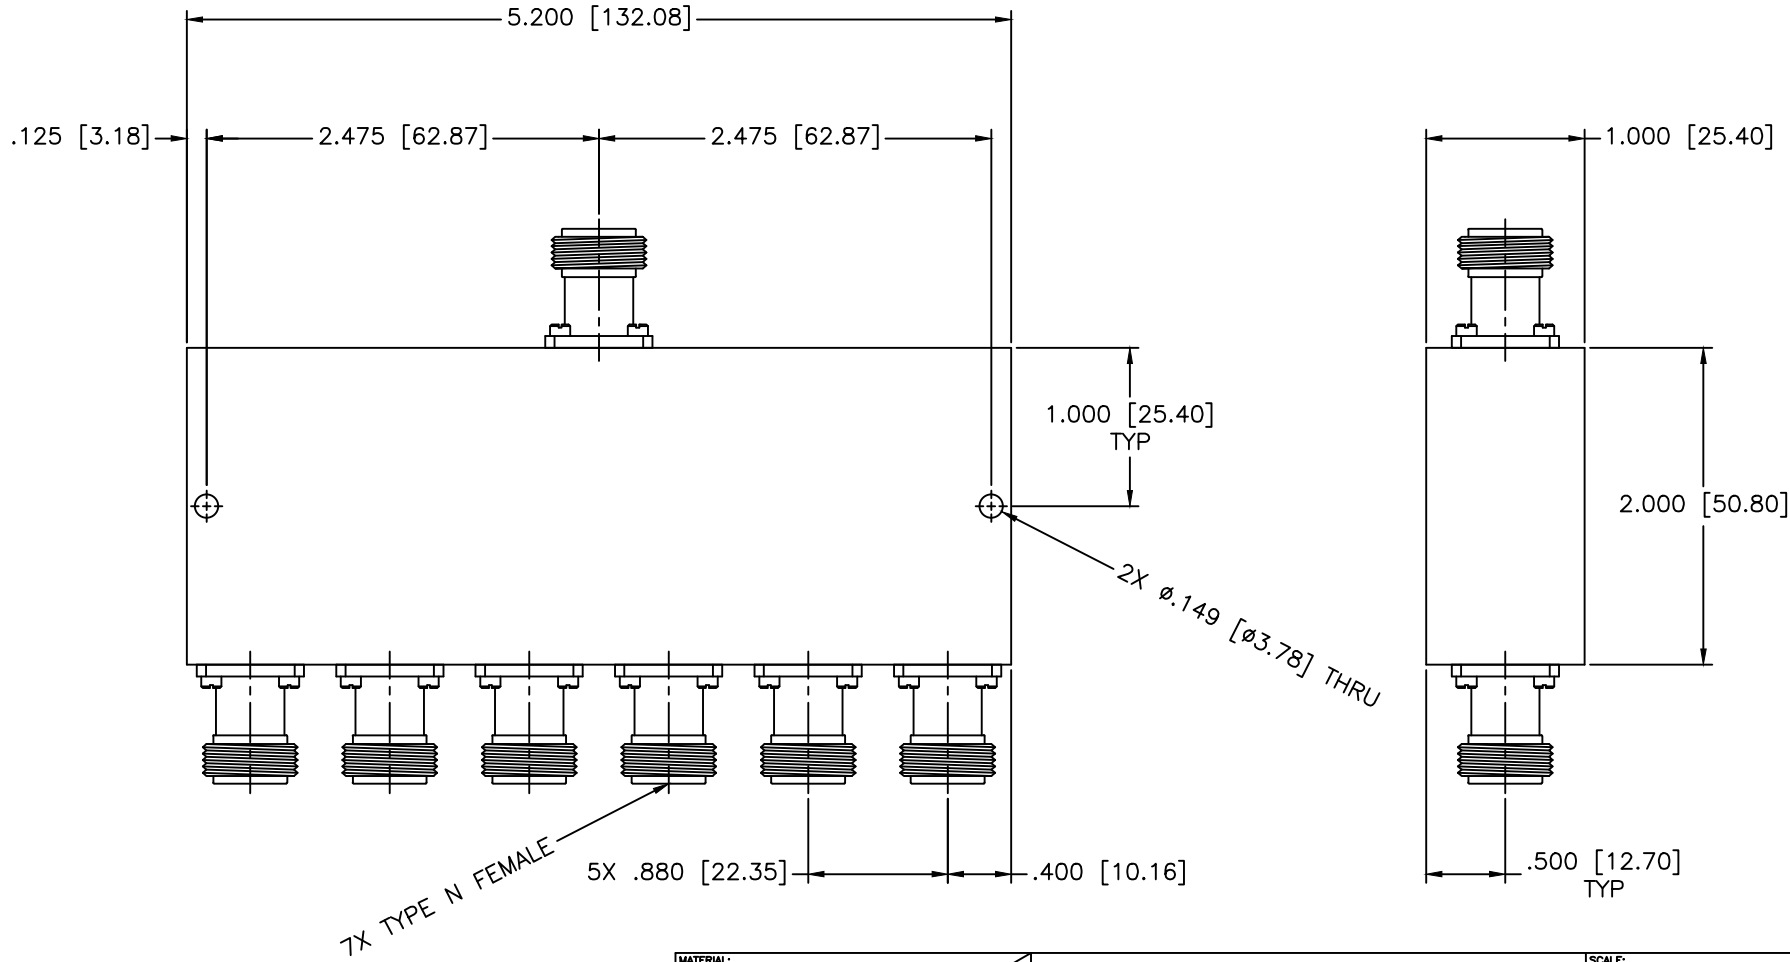

SPECIFICATIONS

Frequency Range: 1.8–2.2 GHz
 Isolation: 18dB Min.
 VSWR: 1.60:1 Max.
 Insertion Loss: 1.8dB Max.
 Amplitude Balance: ±1.75dB Max.
 Phase Balance: ±10 Deg. Max.
 Power Average: 20W (Load vswr @1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 10-08-2013
APPROVED: T. Nguyen	DATE: 10-08-2013

MCLI <small>MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM</small>	SCALE: N/A
	SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 6-WAY POWER DIVIDER
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PS6-15/NF
THIRD ANGLE PROJECTION	CAGE CODE: OD2L5
	SIZE: N/A
	REV: N/A
	DWG NO. 86399
DO NOT SCALE THE DRAWING	

