


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

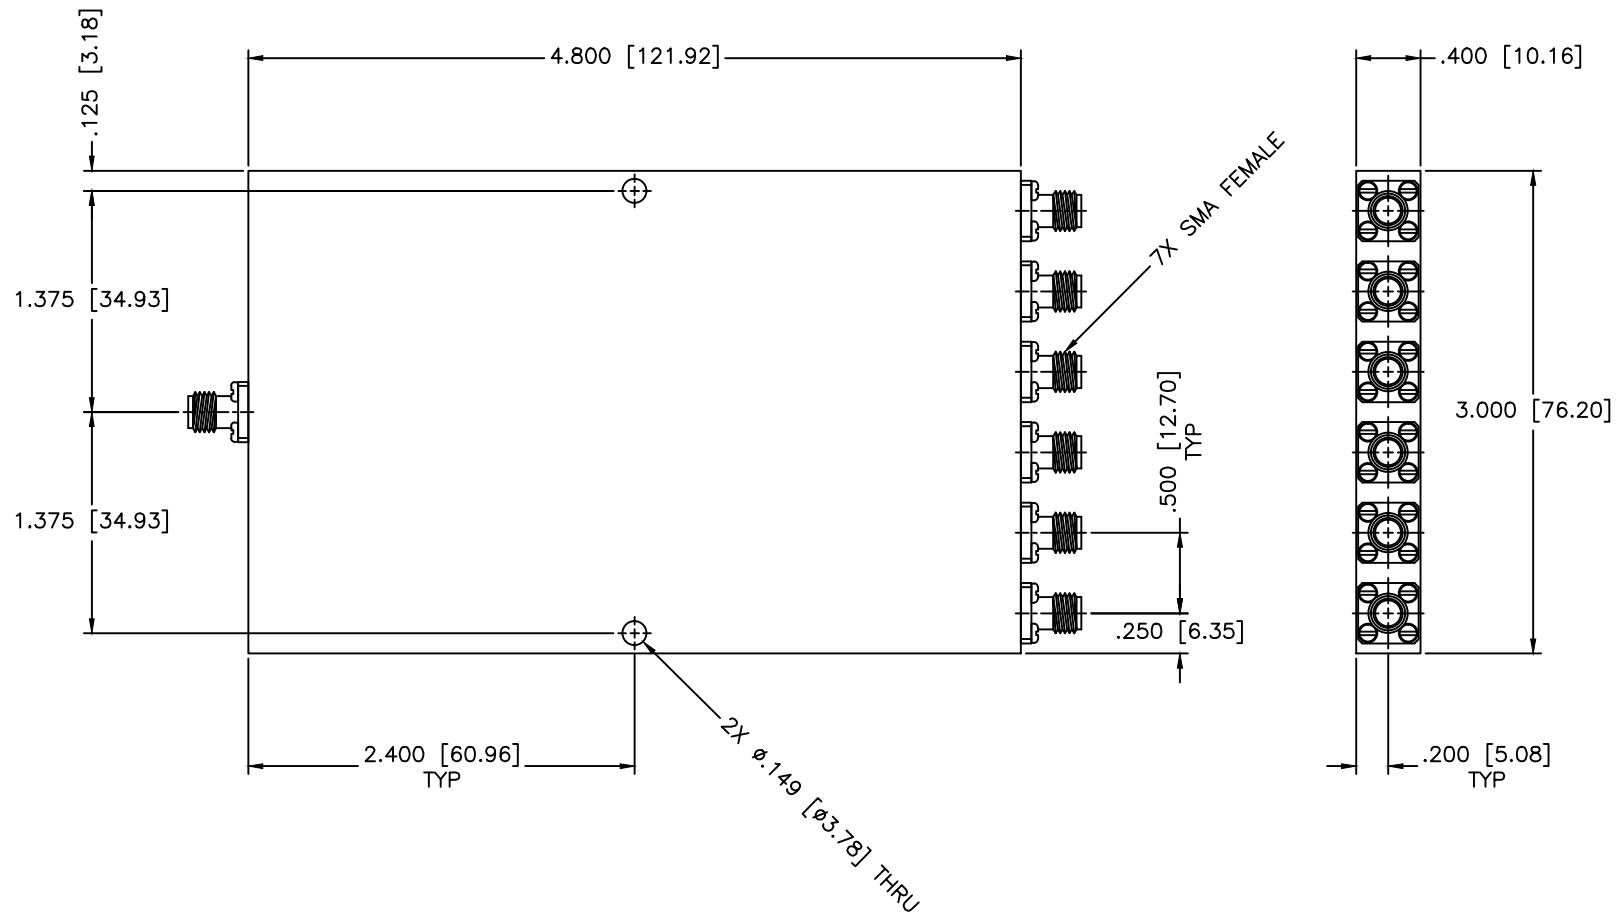

SPECIFICATIONS

Frequency Range: 3.6–6.425 GHz
 Insertion Loss: 1.9dB Max.
 Isolation: 16dB Min.
 Phase Balance: ±10 Deg. Max.
 Amplitude Balance: ±1.5dB Max.
 VSWR In/Out: 1.50:1/1.40:1 Max.
 Input Power: 20W (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		SHEET:	
DRAWN:		PART NO.		6-WAY POWER DIVIDER		
DATE:		CAGE CODE:		PS6-24		
APPROVED:		SIZE:		REV:		
T. Nguyen		A		N/A		
DATE:		DWG NO.		DO NOT SCALE THE DRAWING		
12-29-2004		OD2L5		82062		

