


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

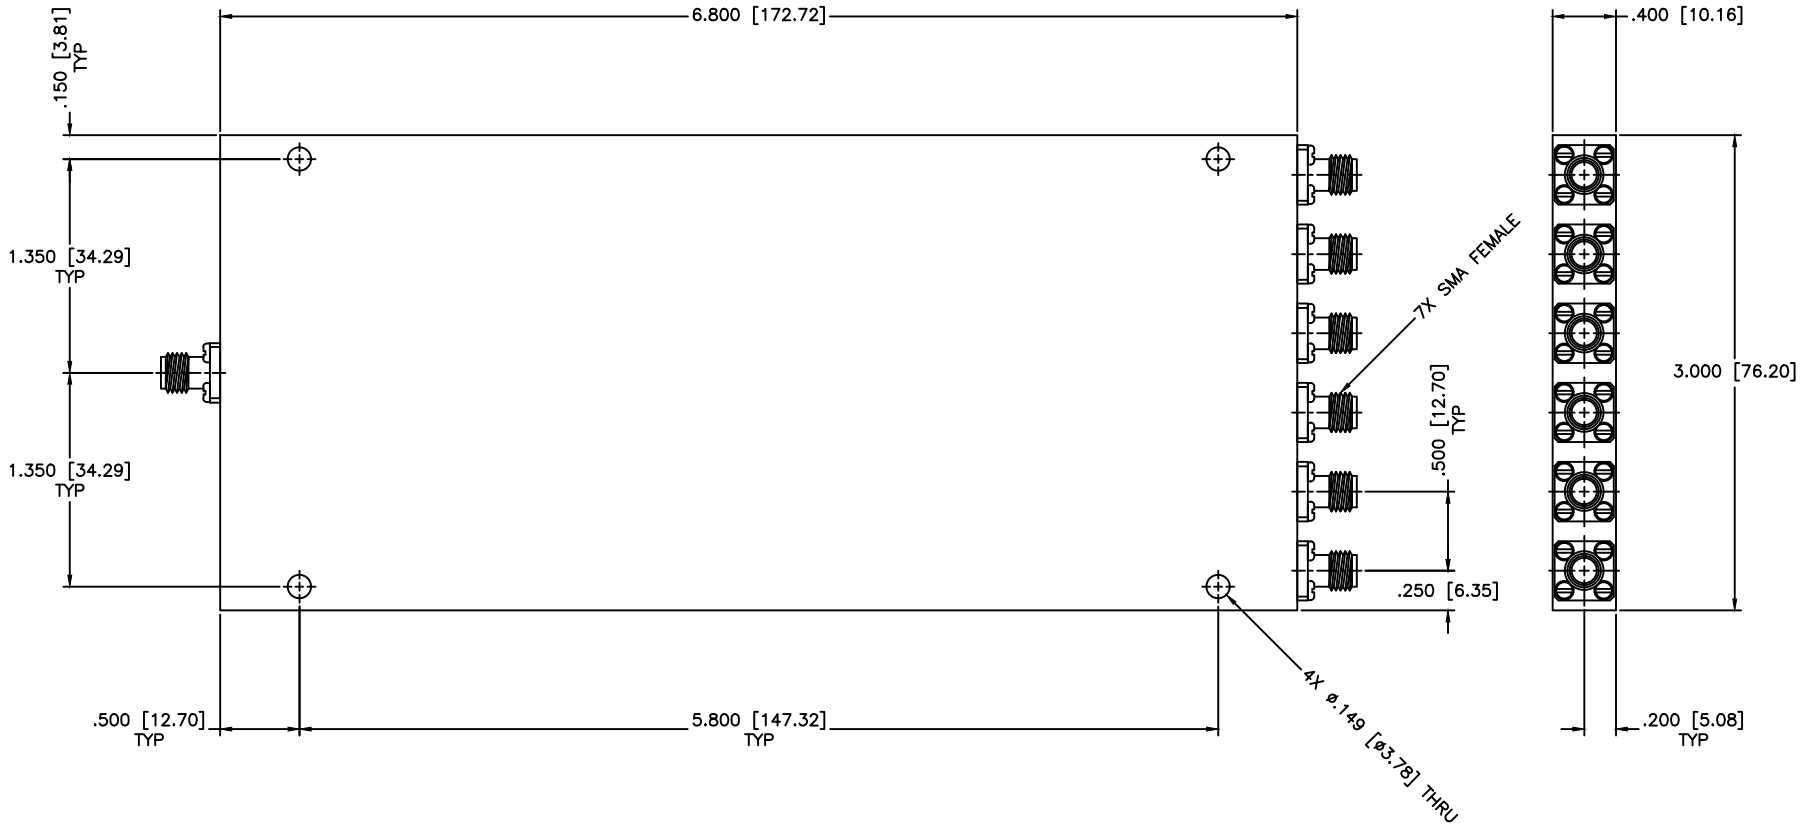

SPECIFICATIONS

Frequency Range: 2-3 GHz
 Insertion Loss: 1.7dB Max.
 Isolation: 18dB Min.
 Phase Balance: ±10 Deg. Max.
 Amplitude Balance: ±1.75dB Max.
 VSWR In/Out: 1.60:1/1.45:1 Max.
 Input Power: 20W (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: 6-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 07-07-1998		PART NO.: PS6-28	
APPROVED: T. Nguyen		DATE: 07-07-1998		CAGE CODE: OD2L5	SIZE: A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		REV: N/A	DWG NO.: 81836
DO NOT SCALE THE DRAWING					