


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

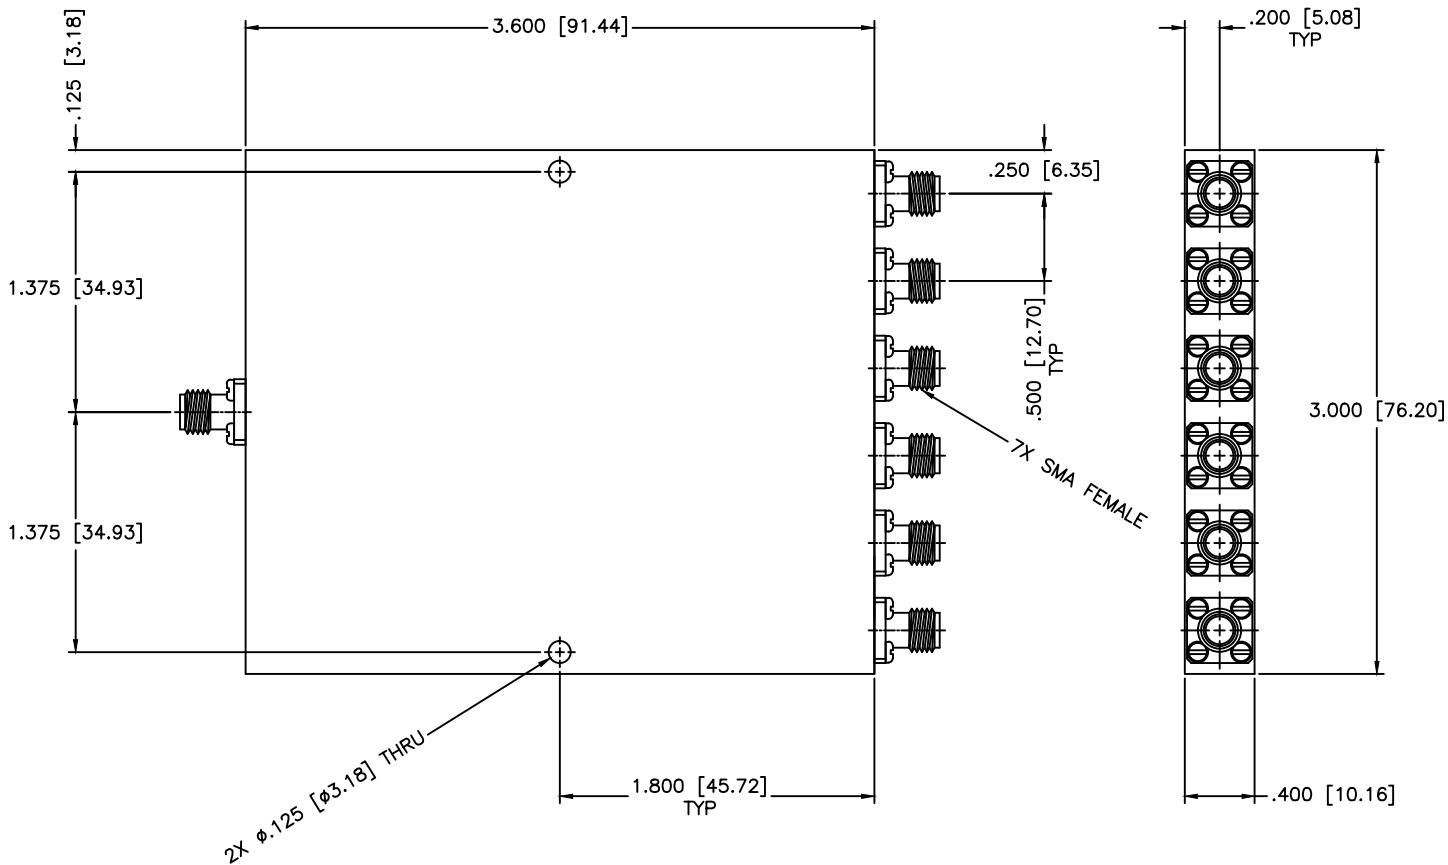

SPECIFICATIONS

Frequency Range: 7–18 GHz
 Insertion Loss: 3.5dB Max.
 Isolation: 14dB Min.
 Phase Balance: ±20 Deg. Max.
 Amplitude Balance: ±2.0dB Max.
 VSWR: 1.85:1 Max.
 Input Power: 20W (Load vswr @ 1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 12-21-1998
APPROVED: T. Nguyen	DATE: 12-21-1998

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: <h3>6-WAY POWER DIVIDER</h3>		PART NO. <h3>PS6-35</h3>	
CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG NO. 81184
DO NOT SCALE THE DRAWING			

