


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

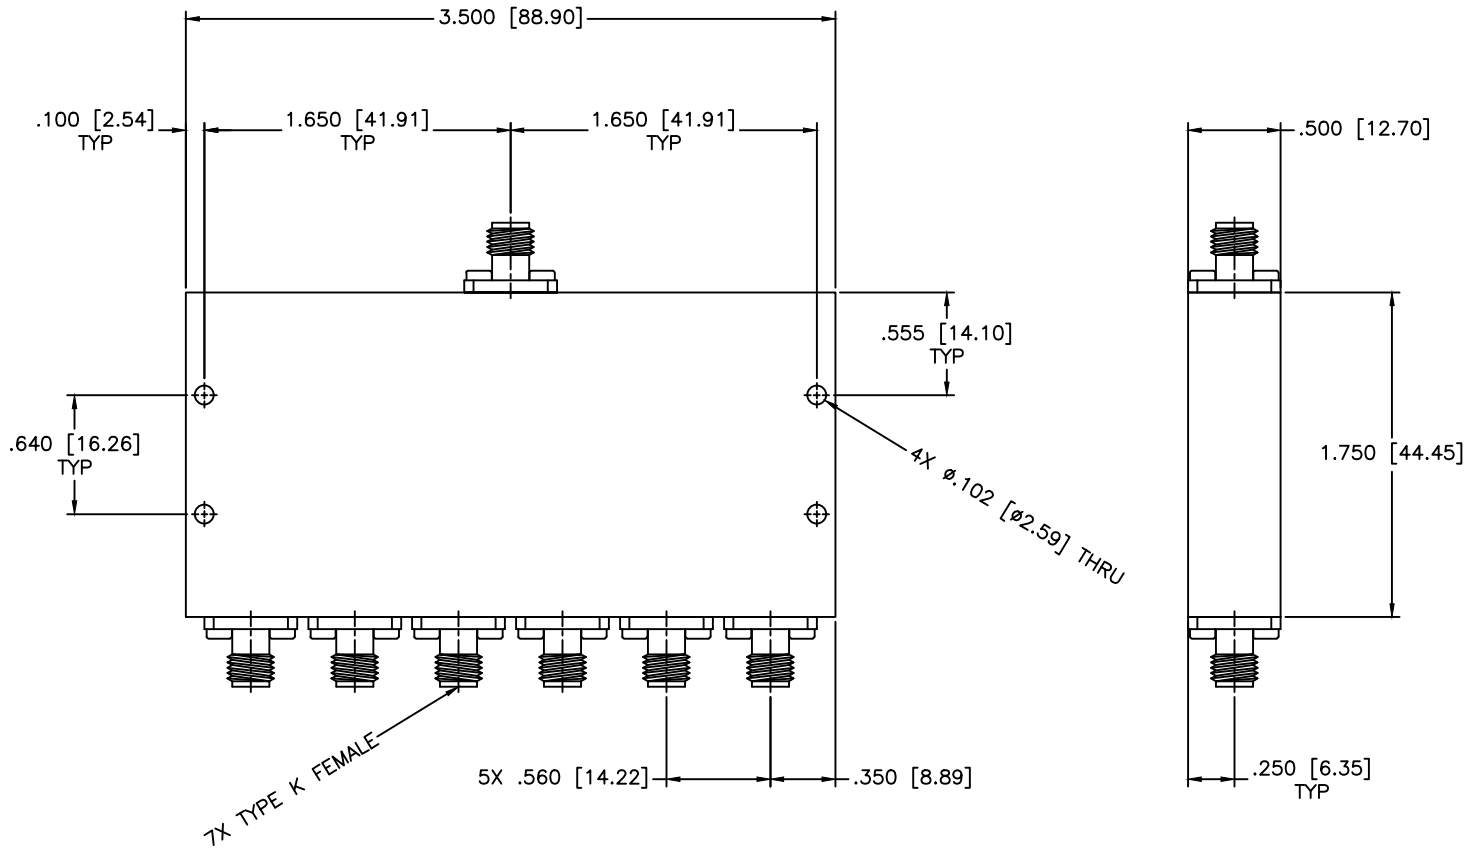

SPECIFICATIONS

Frequency Range: 10–32 GHz
 Insertion Loss: 1.9dB Max.
 Isolation: 10dB Min.
 Amplitude Balance: ±2.0dB Max.
 VSWR: 1.75:1 Max.
 Input Power: 10W (Load vswr © 1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 03-11-2006
APPROVED: T. Nguyen	DATE: 03-11-2006

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 6-WAY POWER DIVIDER
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PS6-38
THIRD ANGLE PROJECTION 	CAGE CODE: OD2L5
	SIZE: A REV: N/A DWG NO. DO NOT SCALE THE DRAWING 83086