


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

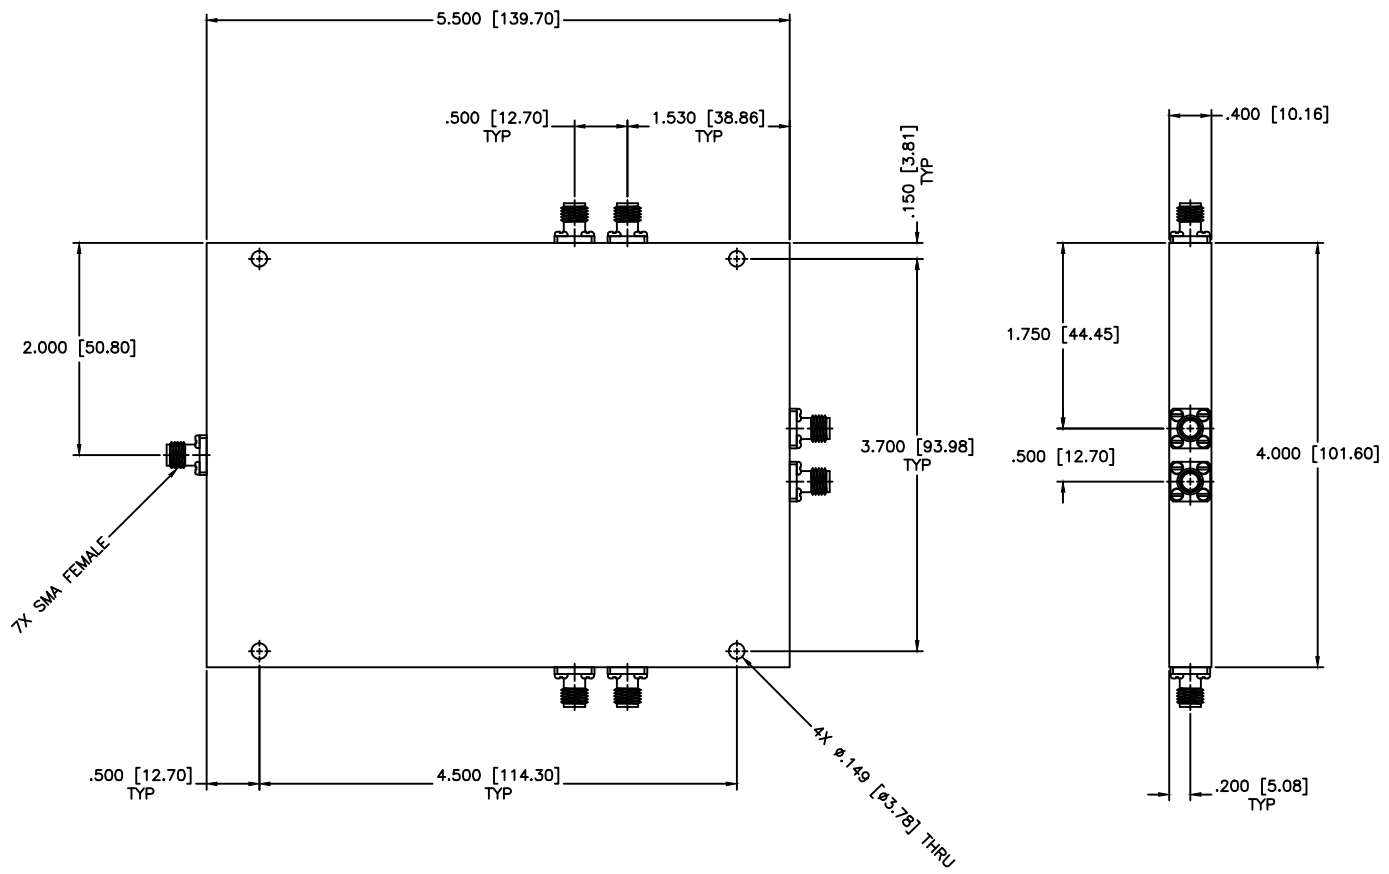

SPECIFICATIONS

Frequency Range: 0.5–2 GHz
 Insertion Loss: 2.0dB Max.
 Isolation: 16dB Min.
 Phase Balance: ± 10 Deg. Max.
 Amplitude Balance: ± 1.75 dB Max.
 VSWR In/Out: 1.70:1/1.60:1 Max.
 Input Power: 20W (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE:		6-WAY POWER DIVIDER			
PART NO.:		PS6-3B			
DRAWING: Paiboon Luekhamhan	DATE: 07-07-1998	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	SIZE: N/A
APPROVED: T. Nguyen	DATE: 07-07-1998			REV: N/A	DWG NO. 81079
DO NOT SCALE THE DRAWING					