


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

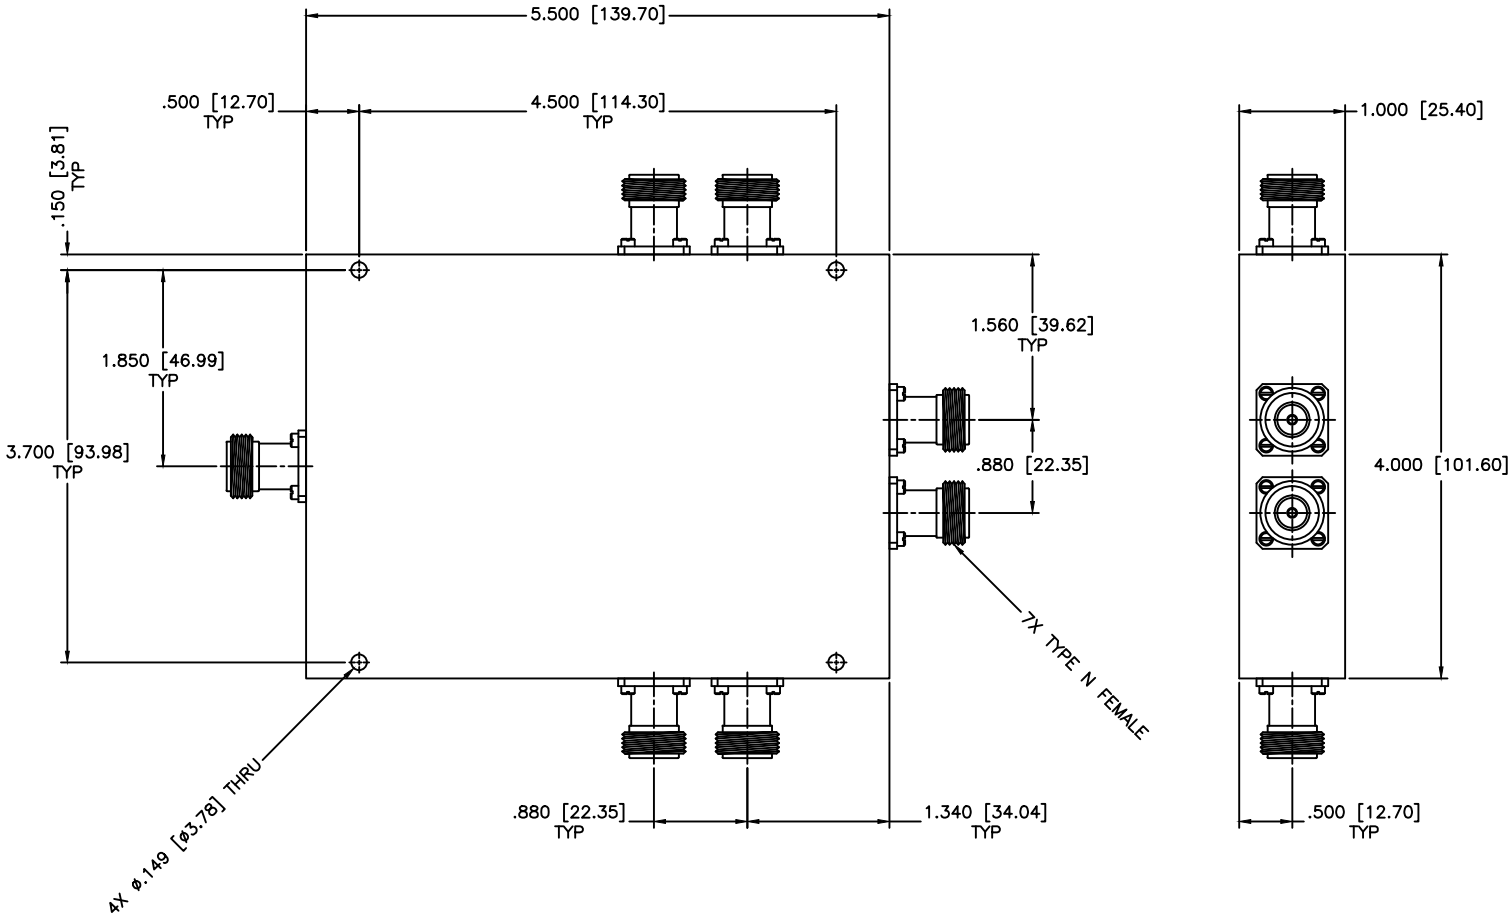

SPECIFICATIONS

Frequency Range: 0.5–2.0 GHz
 Insertion Loss: 2.0dB Max.
 Isolation: 16dB Min.
 VSWR: 1.70:1 Max.
 Phase Balance: ±10 Deg. Max.
 Amplitude Balance: ±0.8dB Max.
 Input Power: 20W (Load vswr at 1.2)

MATERIAL:		 MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°	DRAWING TITLE: 6-WAY POWER DIVIDER	
		PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: PS6-3/NF	
DRAWING:	DATE:	 THIRD ANGLE PROJECTION	CAGE CODE:	SIZE:
Paiboon Luekhamhan	10-10-2013		OD2L5	N/A
APPROVED:	DATE:		REV:	DWG. NO.:
T. Nguyen	10-10-2013		N/A	86404
			DO NOT SCALE THE DRAWING	