


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

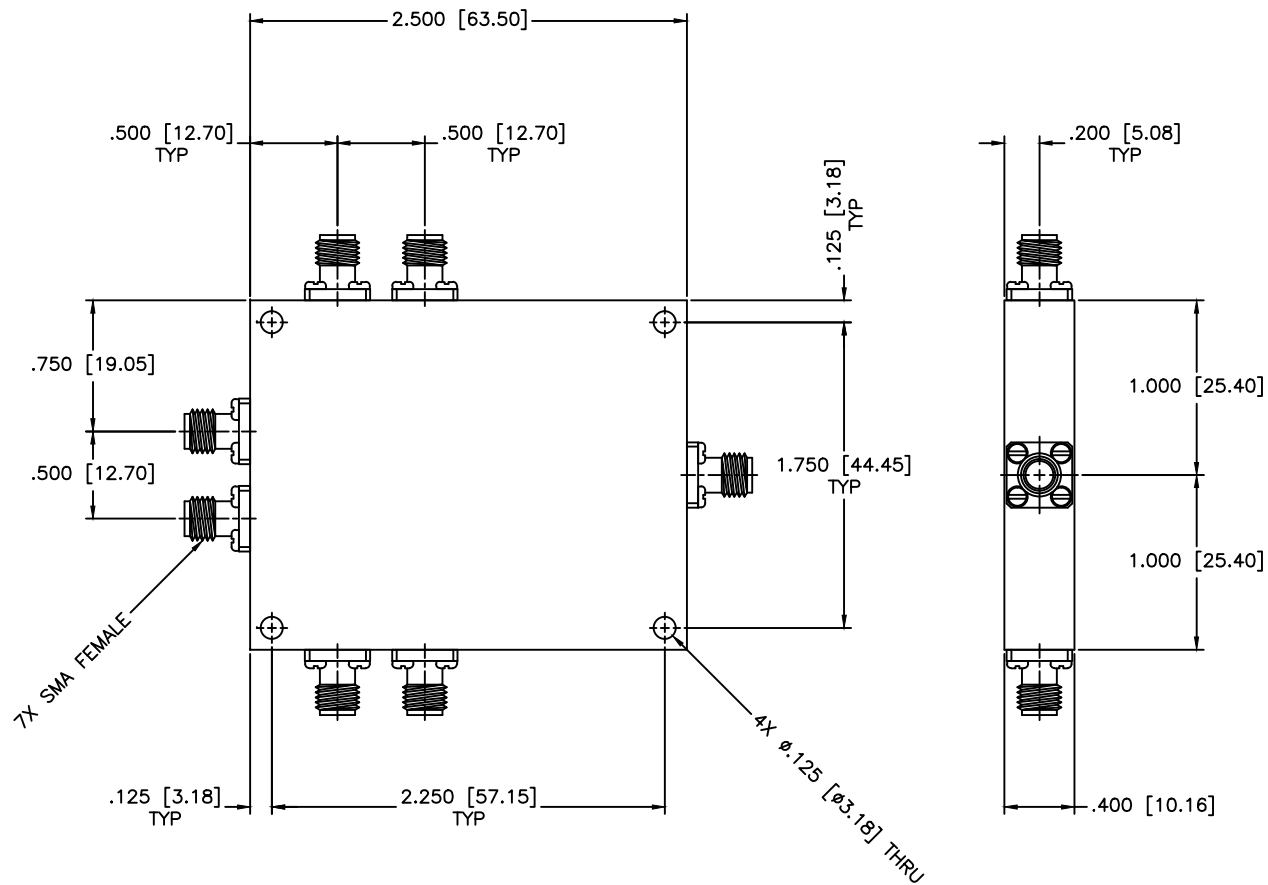

SPECIFICATIONS

Frequency Range: 0.5–2.5 GHz
 Insertion Loss: 2.5dB Max.
 Isolation: 15dB Min.
 Phase Balance: ± 12 Deg Max.
 Amplitude Balance: ± 1.9 dB Max.
 VSWR IN/OUT: 1.75:1/1.70:1 Max.
 Input Power: 20W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE: 6-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 01-26-1998	PART NO. PS6-4	
APPROVED: T. Nguyen		DATE: 01-26-1998	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO. 80838
		THIRD ANGLE PROJECTION	DO NOT SCALE THE DRAWING	