


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

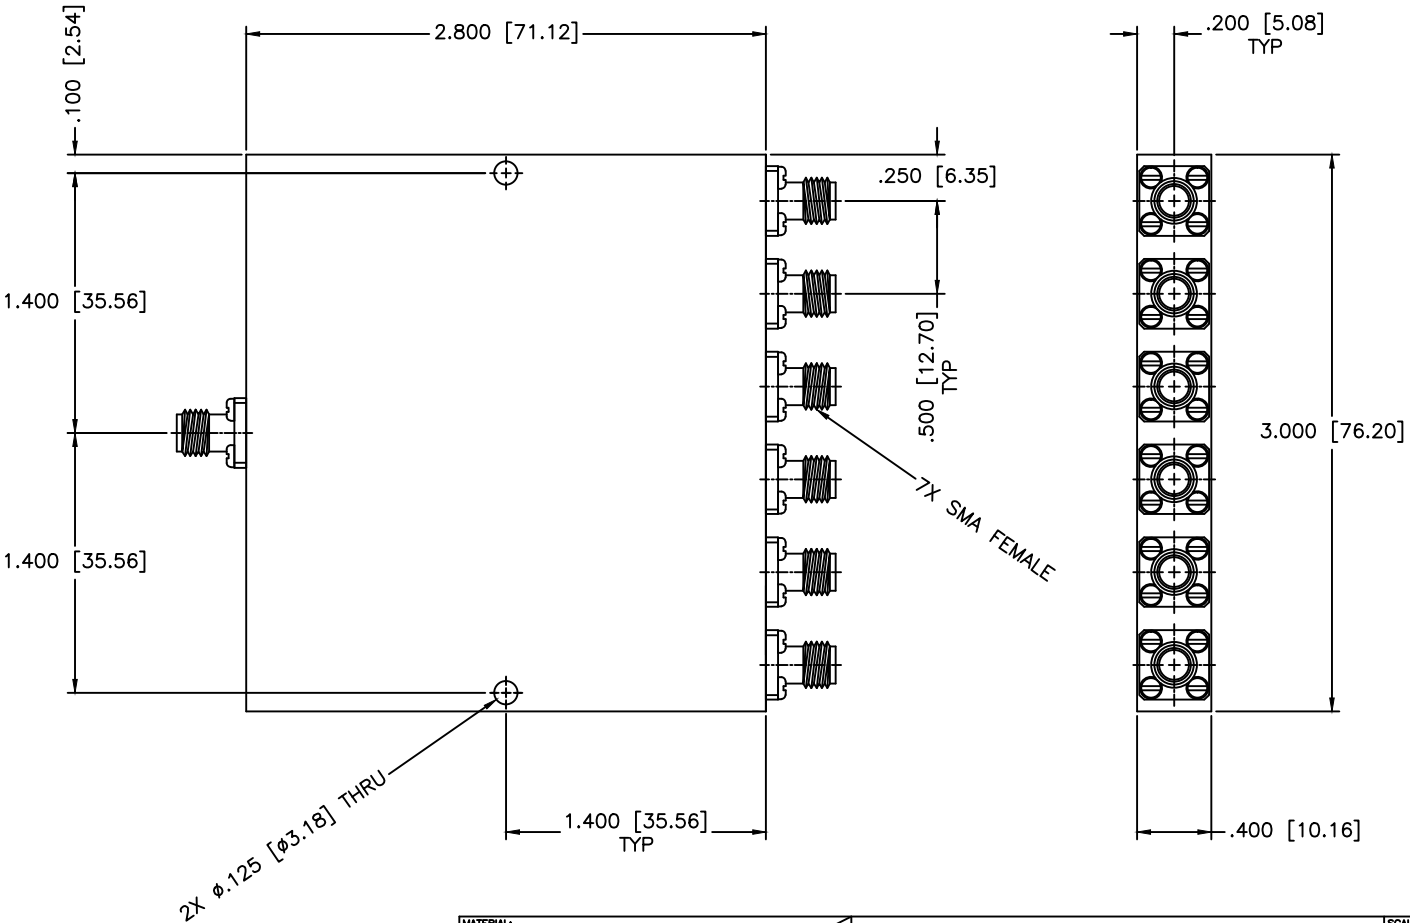

**SPECIFICATIONS**

Frequency Range: 12–26.5 GHz  
 Insertion Loss: 4.6dB Max.  
 Isolation: 14dB Min.  
 VSWR: 1.70:1 Max.  
 Amplitude Balance: ±2.0dB Max.  
 Power: 20W (Load VSWR @ 1.2 )

MATERIAL:	
DRAWN:	DATE:
Paiboon Luekhamhan	11-02-2009
APPROVED:	DATE:
T. Nguyen	11-02-2009

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWING TITLE: <b>6-WAY POWER DIVIDER</b>		PART NO.: <b>PS6-41</b>		
CAGE CODE: <b>OD2L5</b>		SIZE:	N/A	REV:
THIRD ANGLE PROJECTION 		REV:	N/A	DWG NO.:
		DO NOT SCALE THE DRAWING		<b>84626</b>