


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

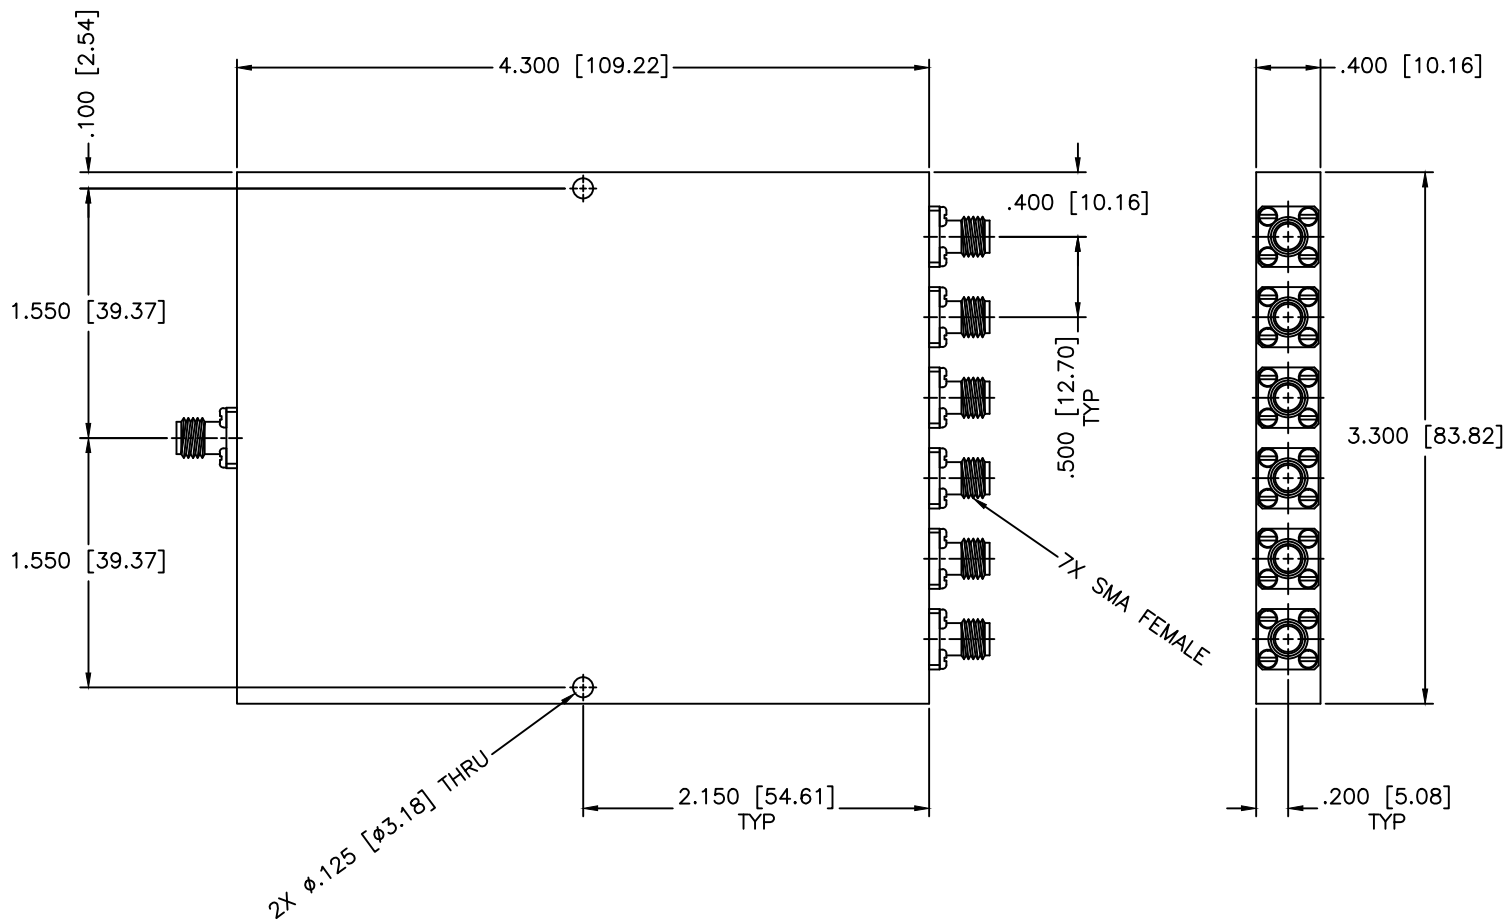

**SPECIFICATIONS**

Frequency Range: 0.81–0.83 GHz  
 Insertion Loss: 1.9dB Max.  
 Isolation: 16dB Min.  
 Phase Balance: ±20 Deg. Max.  
 Amplitude Balance: ±1.75dB Max.  
 VSWR: 1.50:1 Max.  
 Input Power: 20W (Load vswr @ 1.2)

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7256 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	6-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 12-29-2004	PART NO. PS6-42	
APPROVED: T. Nguyen		DATE: 12-29-2004	CAGE CODE: OD2L5	SIZE: A
PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		REV: N/A	DWG NO. 82065	DO NOT SCALE THE DRAWING