


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

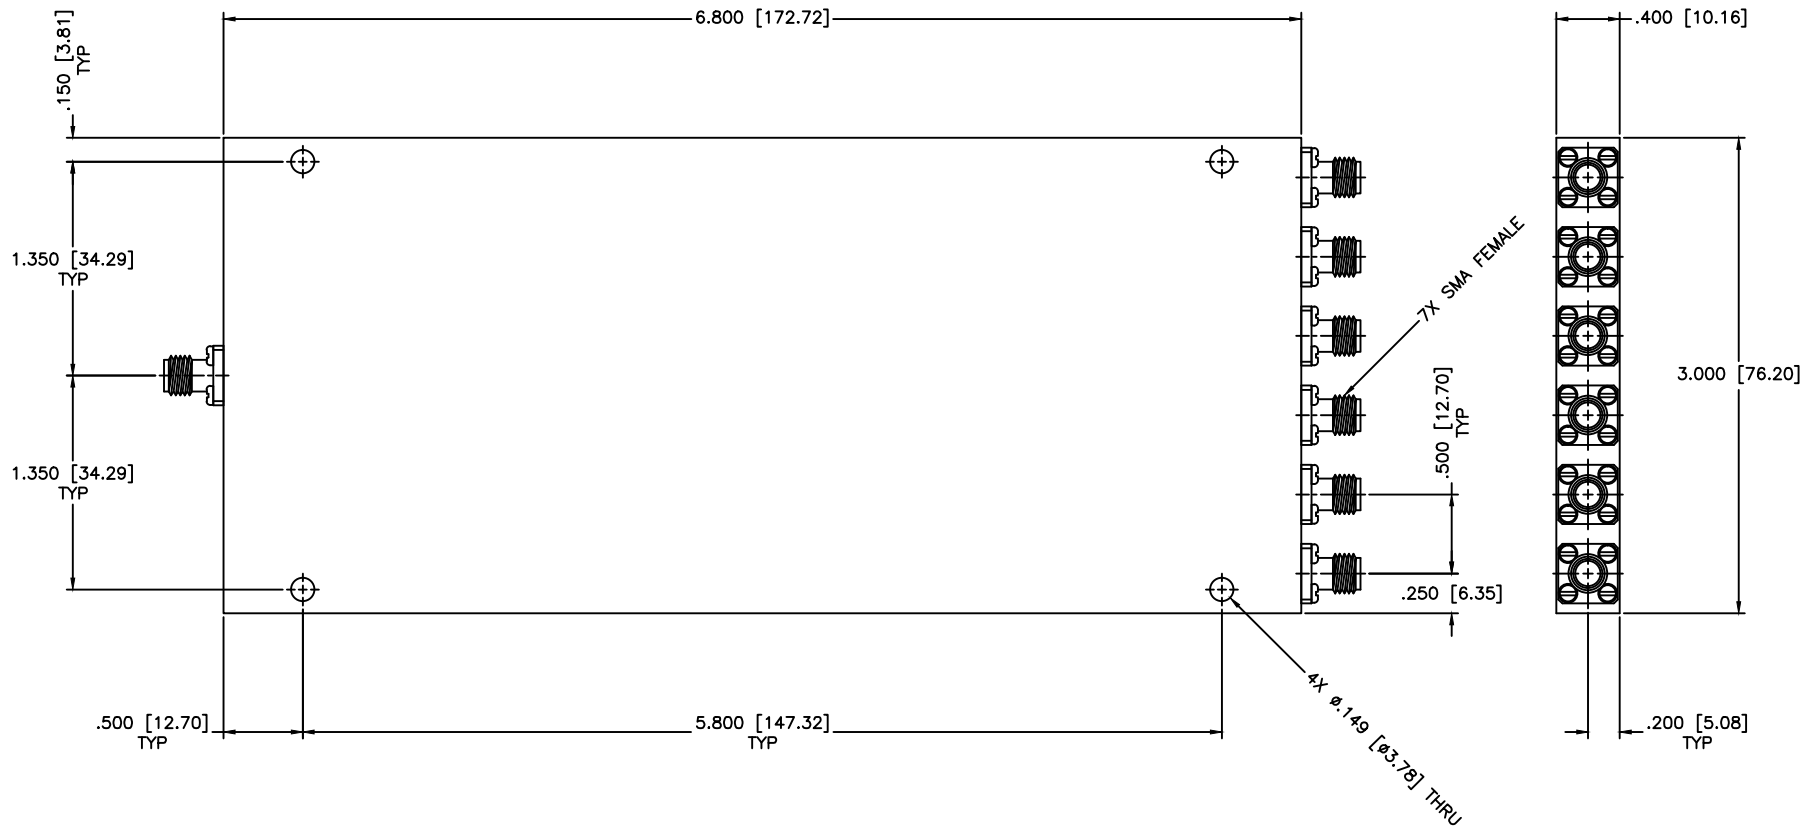

SPECIFICATIONS

Frequency Range: 2-4 GHz
 Isolation: 15dB Min.
 VSWR In/Out: 1.75:1/1.70:1 Max.
 Insertion Loss: 2.7dB Max.
 Amplitude Balance: ± 1.75 dB Max.
 Phase Balance: ± 12 Deg. Max.
 Power Average: 20 Watts

MATERIAL:	
<p>DRAWN: Paiboon Luekhamhan</p> <p>DATE: 07-07-1998</p> <p>APPROVED: T. Nguyen</p> <p>DATE: 07-07-1998</p>	

<p>MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM</p>	SCALE: N/A	
	SHEET: N/A	
<p>UNLESS OTHERWISE SPECIFIED:</p> <p>TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .008$ ANGLE: $\pm 1/2^\circ$</p>	DRAWING TITLE: 6-WAY POWER DIVIDER	
<p>PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</p>	PART NO.: PS6-5	
<p>CAGE CODE: OD2L5</p>	<p>SIZE: N/A</p>	<p>REV: N/A</p>
<p>THIRD ANGLE PROJECTION</p>		<p>DWG NO. 80839</p>
<p>DO NOT SCALE THE DRAWING</p>		