


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

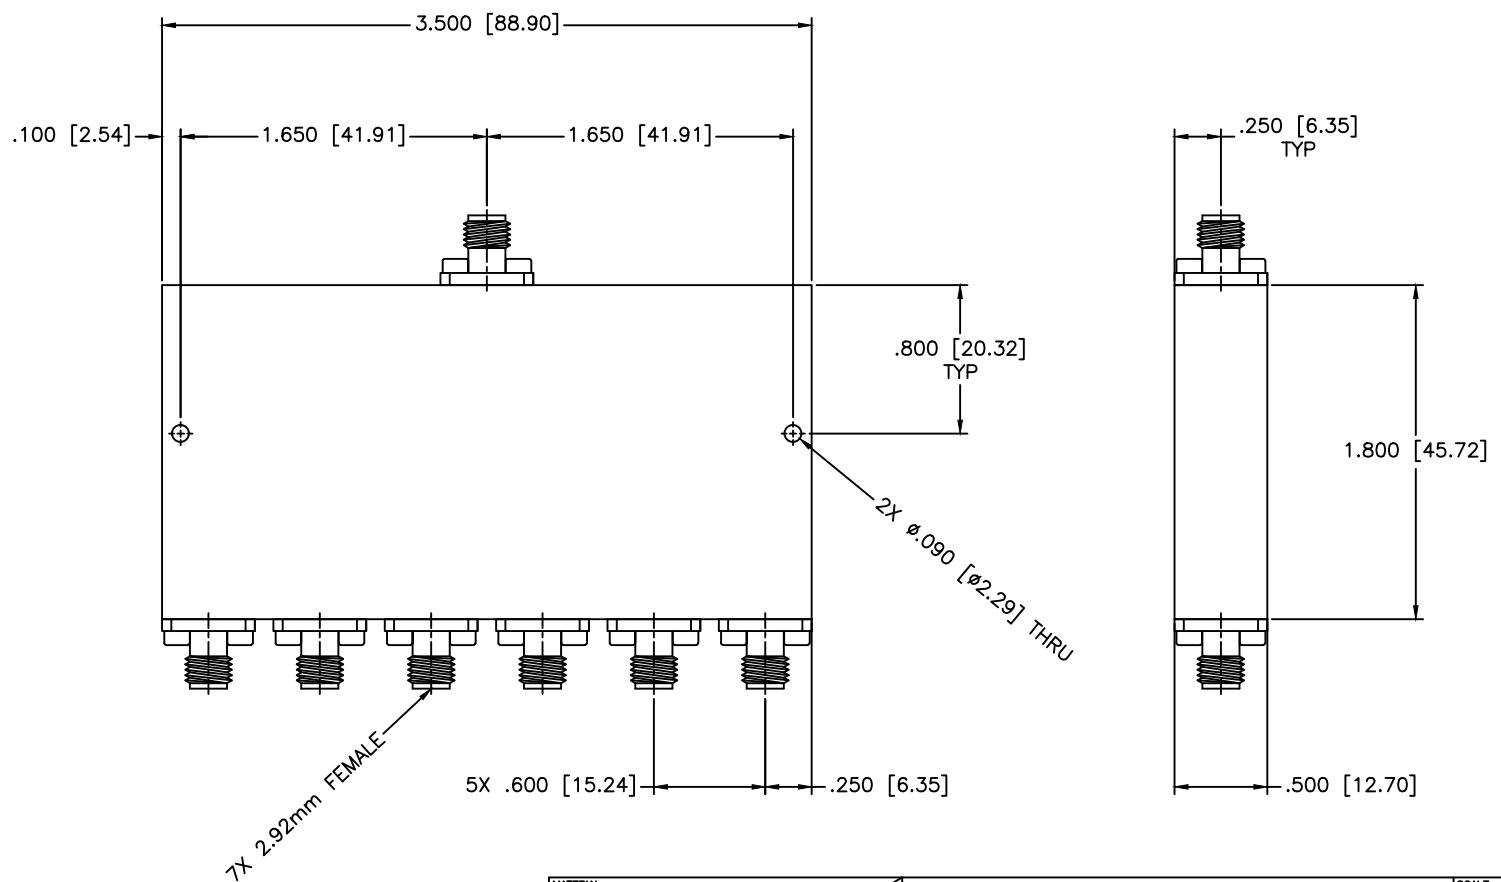

SPECIFICATIONS

Frequency Range: 10–26.5 GHz
 VSWR: 1.60:1 Max.
 Amplitude Balance: ±0.5dB Max.
 Phase Balance: ±6 Deg. Max.
 Insertion Loss: 2.1dB Max.
 Isolation: 16dB Min.
 Power Rating: 20W Avg, 3kW Peak

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A
					SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°		DRAWING TITLE: <p style="text-align: center;">6-WAY POWER DIVIDER</p>		
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. <p style="text-align: center;">PS6-51/KF</p>		
DRAWN:	DATE:		CAGE CODE:	SIZE:	REV:	DWG NO.
Paiboon Luekhamhan T. Nguyen	03-11-2014 03-11-2014		OD2L5	A	N/A	86509
			DO NOT SCALE THE DRAWING			