


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

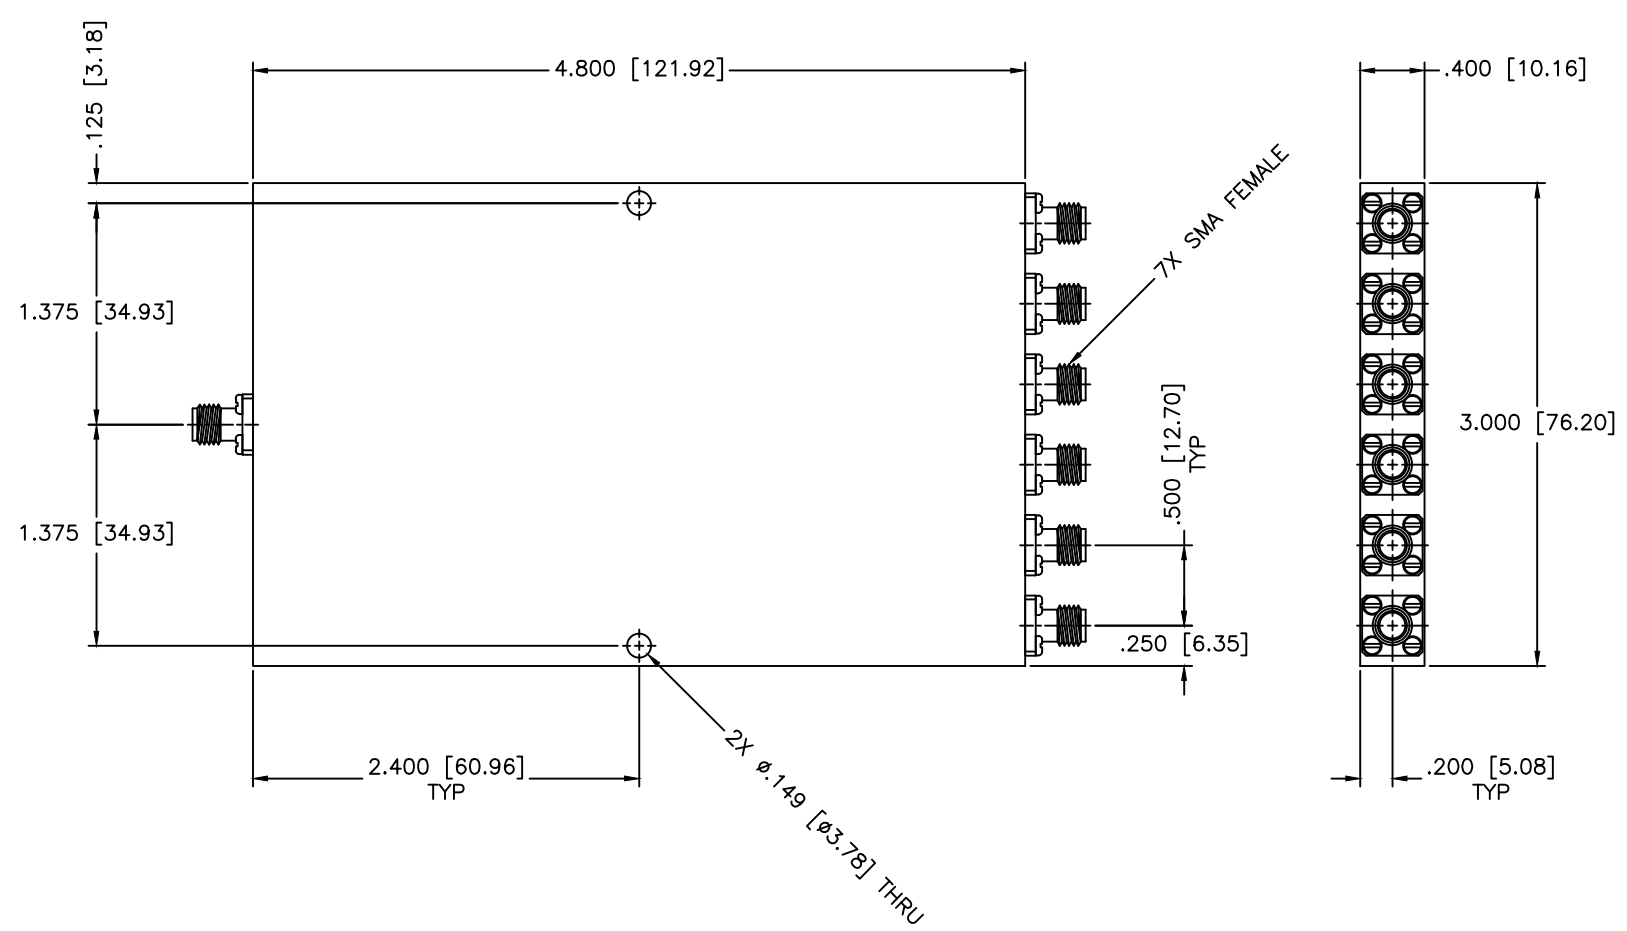

SPECIFICATIONS

Frequency Range: 4–8 GHz
 Insertion Loss: 2.8dB Max.
 Isolation: 15dB Min.
 Phase Balance: ±10 Deg. Max.
 Amplitude Balance: ±1.5dB Max.
 VSWR In/Out: 1.65:1/1.45:1 Max.
 Input Power: 20W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7258 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°			DRAWING TITLE:	6-WAY POWER DIVIDER	
DRAWN:	DATE:	<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>	PART NO.:	PS6-6	
APPROVED:	DATE:		CAGE CODE:	SIZE:	REV:
Pai boon Luekhamhan	01-22-2008	<small>THIRD ANGLE PROJECTION</small> 	OD2L5	A	N/A
T. Nguyen	01-22-2008		DO NOT SCALE THE DRAWING	81185	