


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

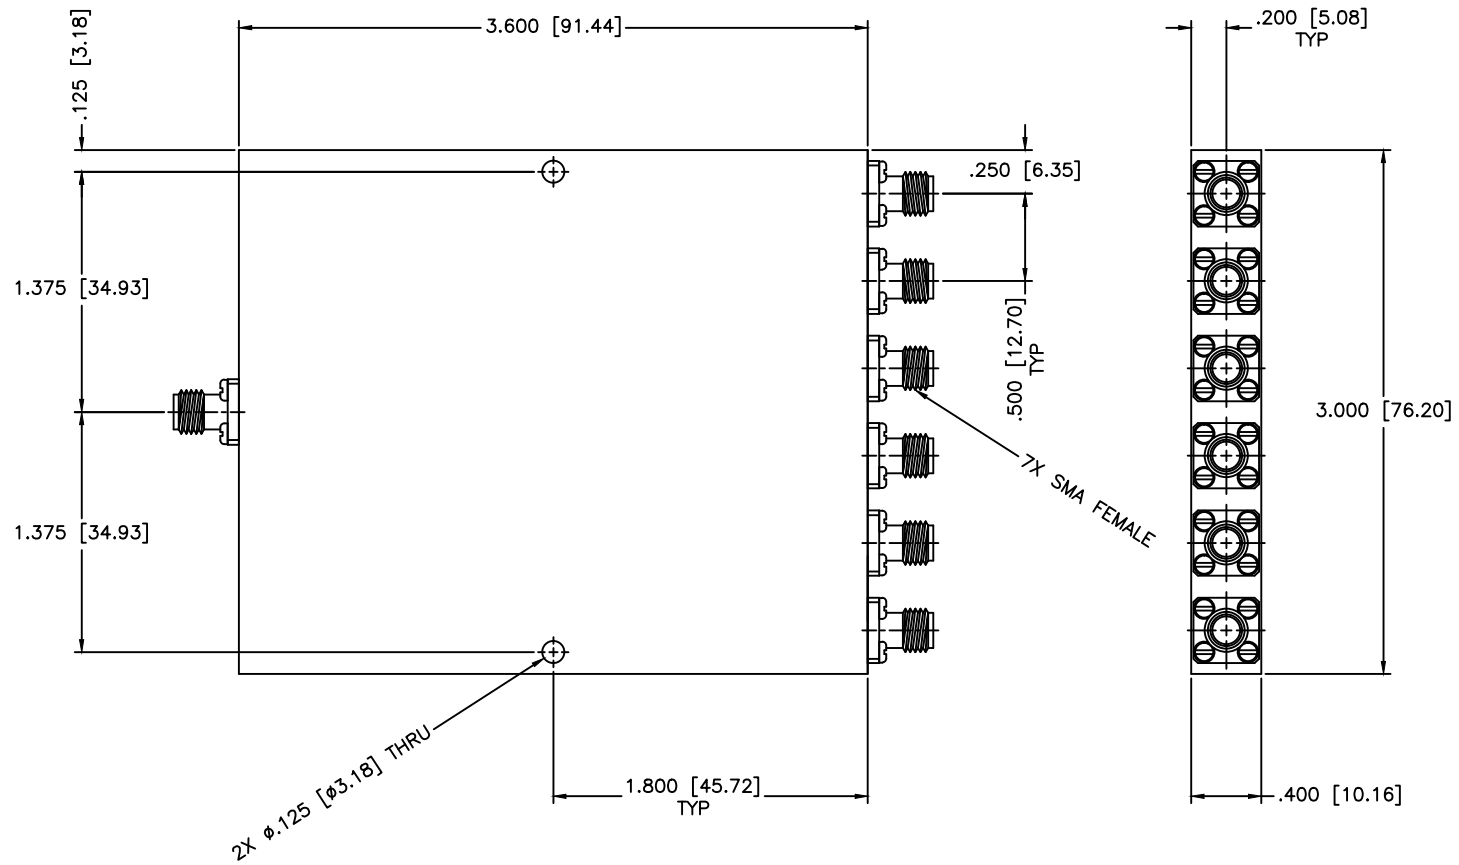

SPECIFICATIONS

Frequency Range: 8–12.4 GHz
 Insertion Loss: 3.2dB Max.
 Isolation: 15dB Min.
 VSWR IN/OUT: 1.65:1/1.45:1 Max.
 Amplitude Balance: ±2dB Max.
 Phase Balance: ±10 Max.
 Power: 20 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 6-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan DATE: 12-21-1998		PART NO.: PS6-8	
APPROVED: T. Nguyen DATE: 12-21-1998		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO. 81182
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING	