


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

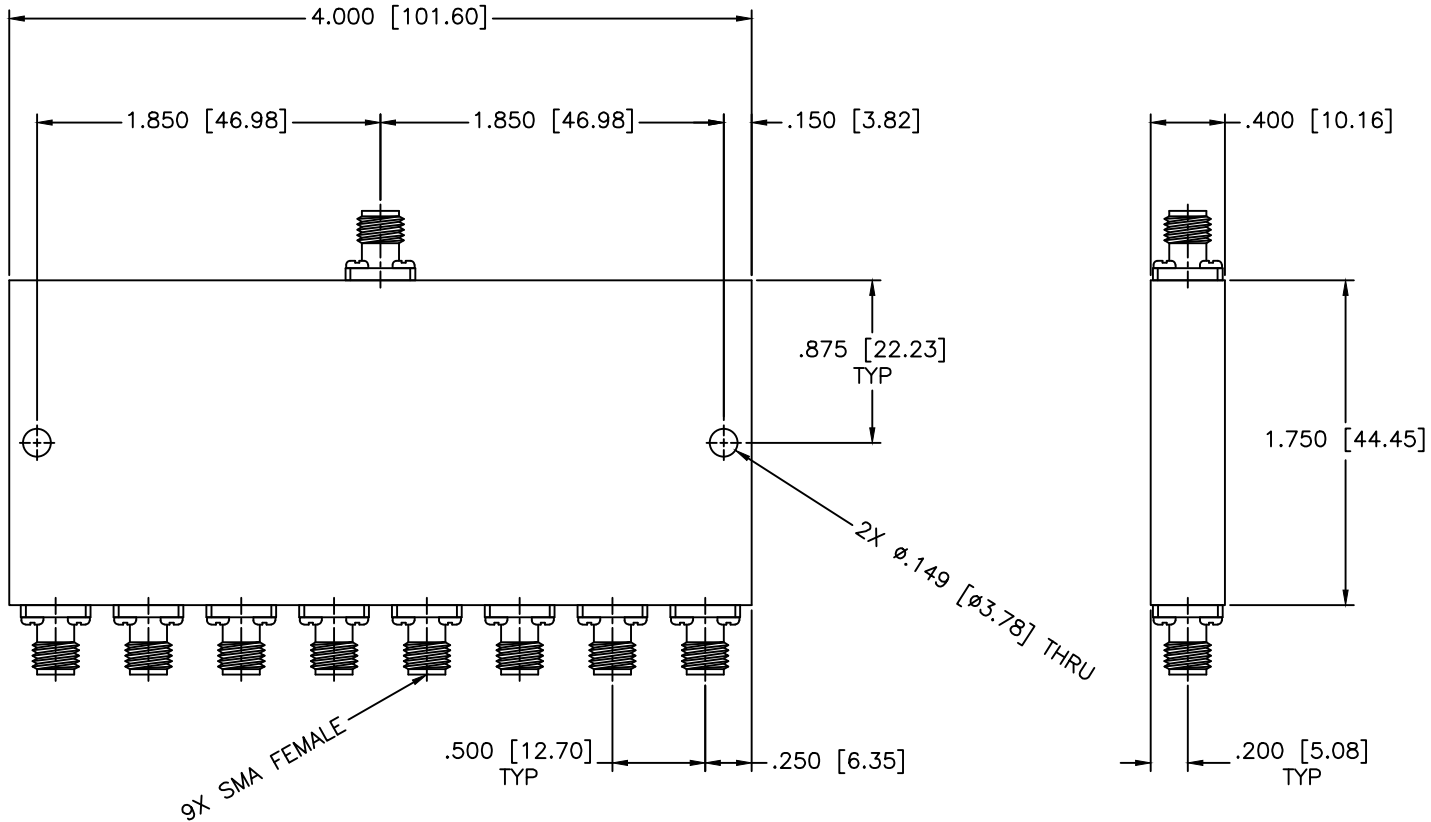

9X SMA FEMALE

SPECIFICATIONS

Frequency Range: 8–12.4 GHz
 Insertion Loss: 1.3dB Max.
 Isolation: 16dB Min.
 Power: 30W
 Amplitude Balance: ±0.5dB
 VSWR: 1.70:1 Max.
 Phase Balance: ±12° Max.
 Operating Temperature: -55°C to +85°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 10-29-1999
APPROVED: T. Nguyen	DATE: 10-29-1999

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 8-WAY POWER DIVIDER		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PS8-10		
THIRD ANGLE PROJECTION	CAGE CODE: OD2L5	SIZE: A	REV: N/A
	DO NOT SCALE THE DRAWING		DWG NO. 80250