


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

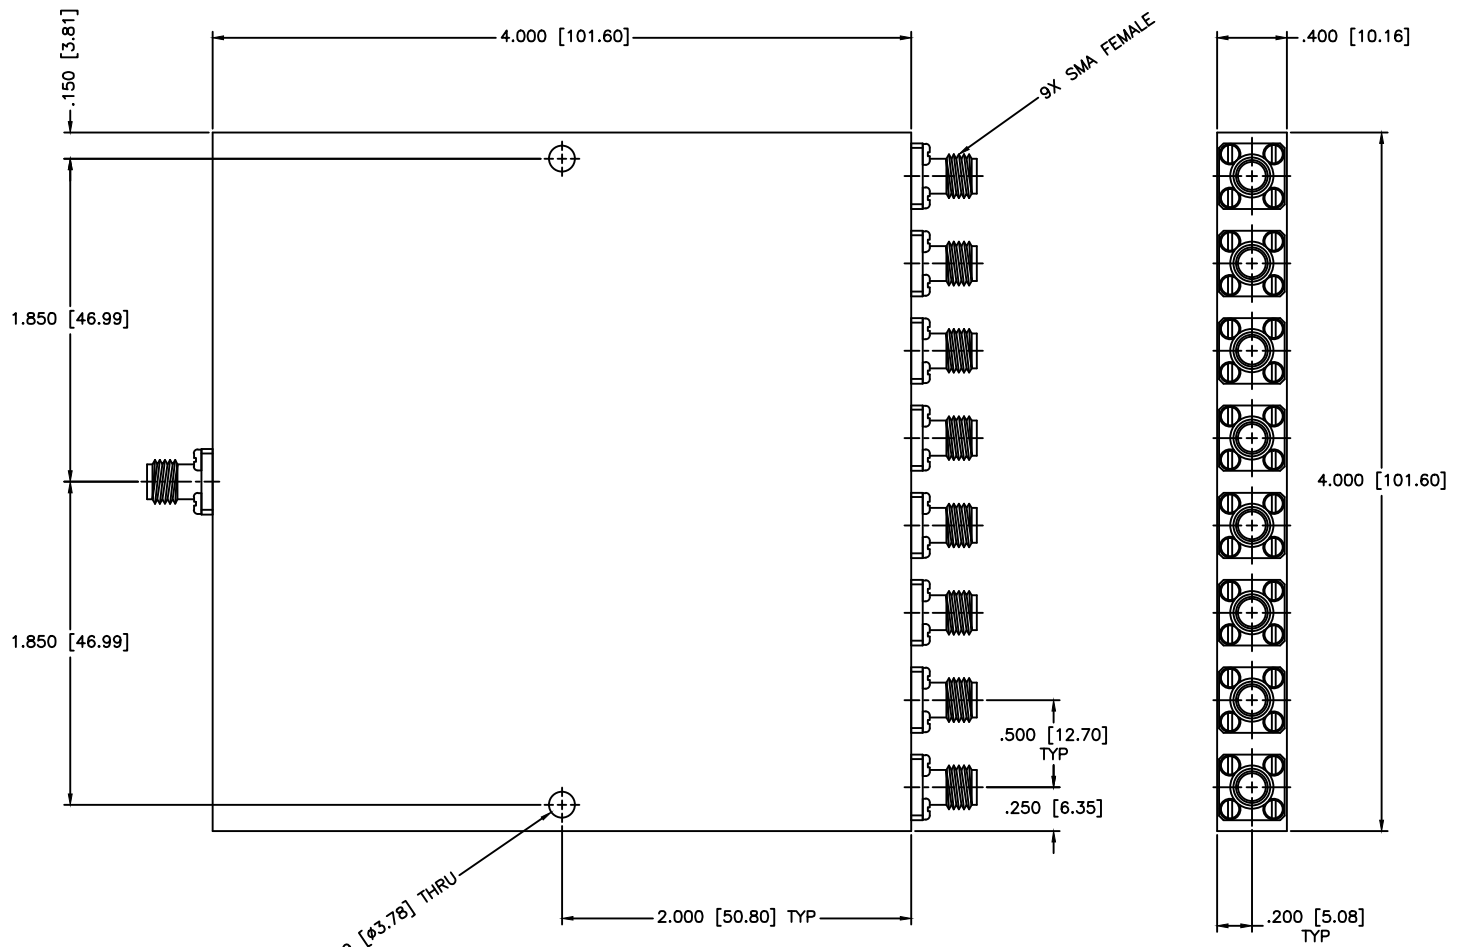

SPECIFICATIONS

Frequency Range: 3.5–5 GHz
 VSWR In/Out: 1.45:1/1.35:1 Max.
 Insertion Loss: 1.0dB Max.
 Isolation: 18dB Min.
 Phase Balance: ±14 Deg. Max.
 Amplitude Balance: ±0.6dB Max.
 Power Rating: 30W (Load vswr @ 1.2)

2X Ø.149 [Ø3.78] THRU

MATERIAL:	
DRAWN:	DATE:
Paiboon Luekhamhan	10-18-1998
APPROVED:	DATE:
T. Nguyen	10-18-1998



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE:
8-WAY POWER DIVIDER

PART NO.
PS8-106

CAGE CODE:	SIZE:	REV:	DWG NO.
OD2L5	N/A	N/A	81172
DO NOT SCALE THE DRAWING			

