


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

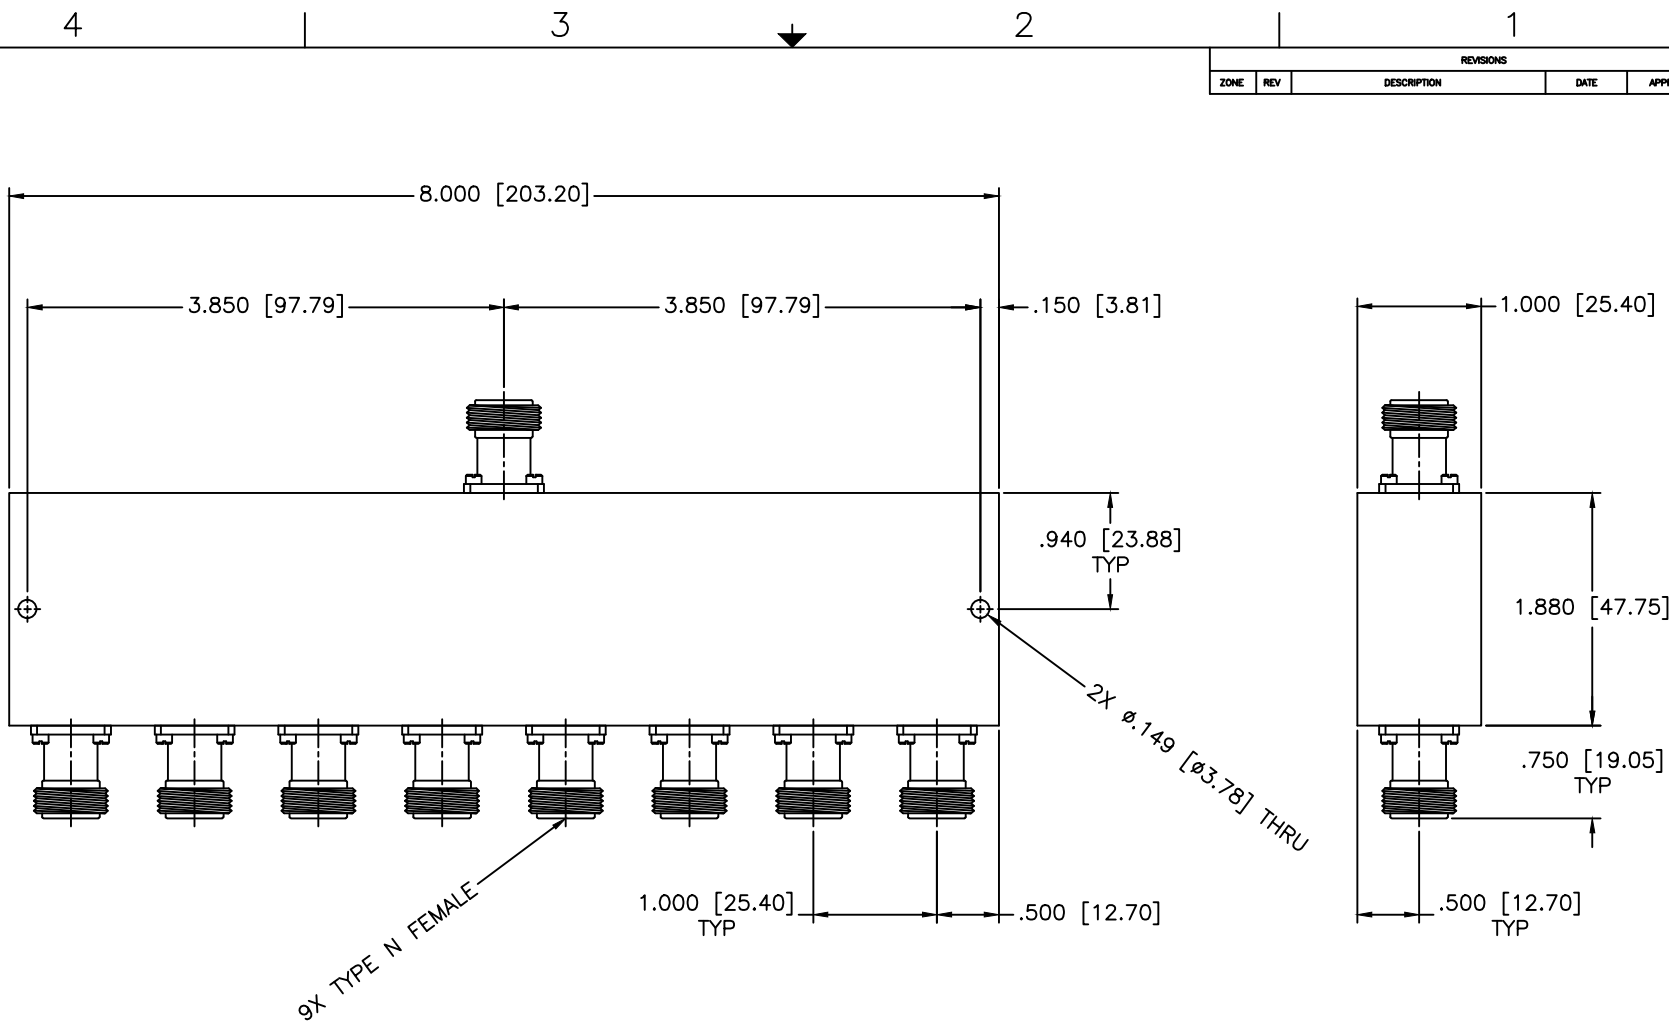

SPECIFICATIONS

Frequency Range: 8–12.4 GHz
 Input VSWR: 1.70:1/1.70:1 Max.
 Insertion Loss: 2.9dB Max.
 Isolation: 15dB Min.
 Phase Balance: ±12 Deg. Max.
 Amplitude Balance: ±0.8dB Max.
 Power Rating: 30W (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.008 ANGLE: ±1/2°			DRAWING TITLE: 8-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 08-05-2021		PART NO.: PS8-10/NF	
APPROVED: T. Nguyen		DATE: 08-05-2021		CAGE CODE: OD2L5	SIZE: N/A
THIRD ANGLE PROJECTION		REV: N/A		DWG NO.: 86915	
DO NOT SCALE THE DRAWING					