


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

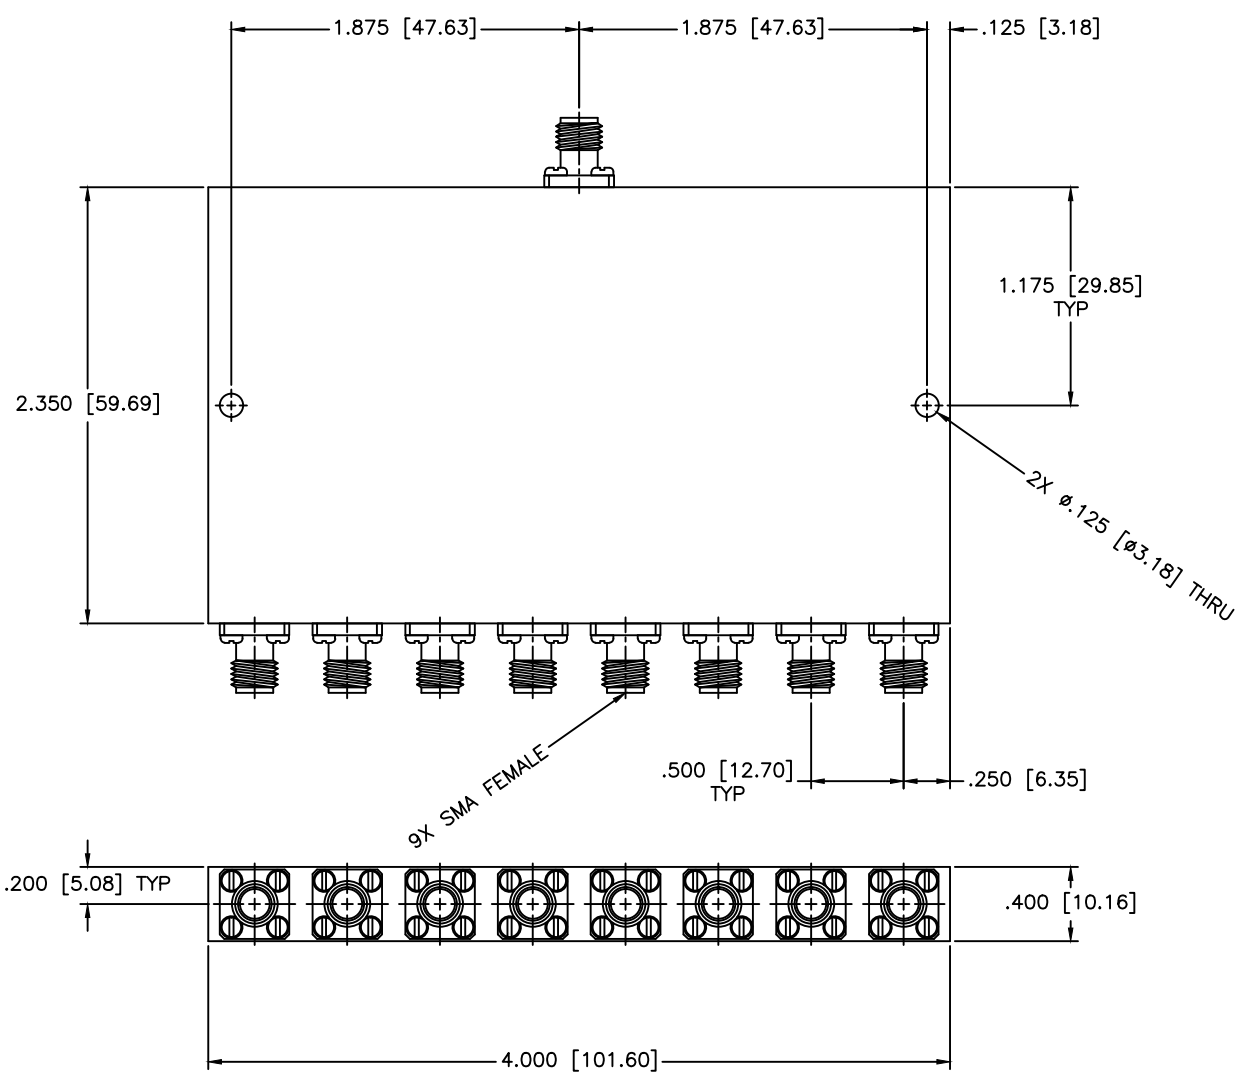

**SPECIFICATIONS**

Frequency Range: 6–18 GHz  
 Insertion Loss: 2.2dB Max.  
 Isolation: 15dB Min.  
 VSWR (In/Out): 1.80:1 Max./1.70:1 Max.  
 Phase Balance: ±15 Deg. Max.  
 Amplitude Balance: ±0.9dB Max.  
 Power Rating: 30W Avg, (Load vswr @ 1.2)

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.015 ANGLE: ±1/2°		DRAWING TITLE: 8-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PS8-11		
DATE: 12-06-2001		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 12-06-2001		SIZE: A REV: B DWG NO. 82156
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		

