


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

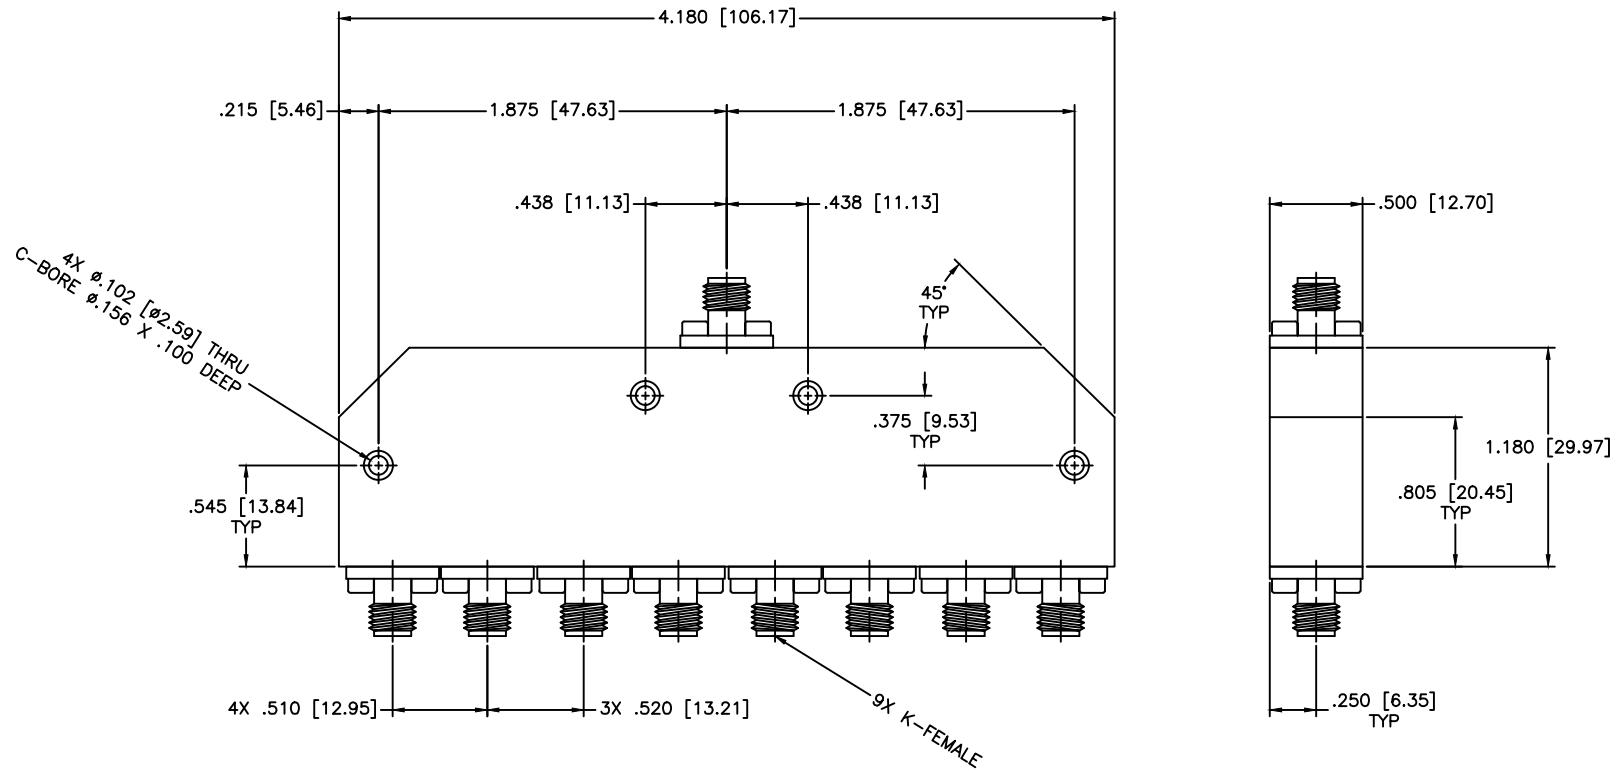

SPECIFICATIONS

- Frequency Range: 28–31GHz
- Insertion Loss: 3.5dB Max.
- Isolation: 20dB Min.
- VSWR: 1.50:1 Max.
- Power Rating: 20W Avg, 3kW Peak
- Amplitude Balance: ±0.4dB Max.
- Phase Balance: ±6 Deg. Max.
- Operating Temperature: -32°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.015 ANGLE: ±1/2°			DRAWING TITLE:	8-WAY POWER DIVIDER
DRAWN:		PART NO.:		PS8-117
DATE:		CAGE CODE:		OD2L5
APPROVED:		SIZE:		A
DATE:		REV:		N/A
T. Nguyen		DWG NO.:		84741
03-19-2010		DO NOT SCALE THE DRAWING		