


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

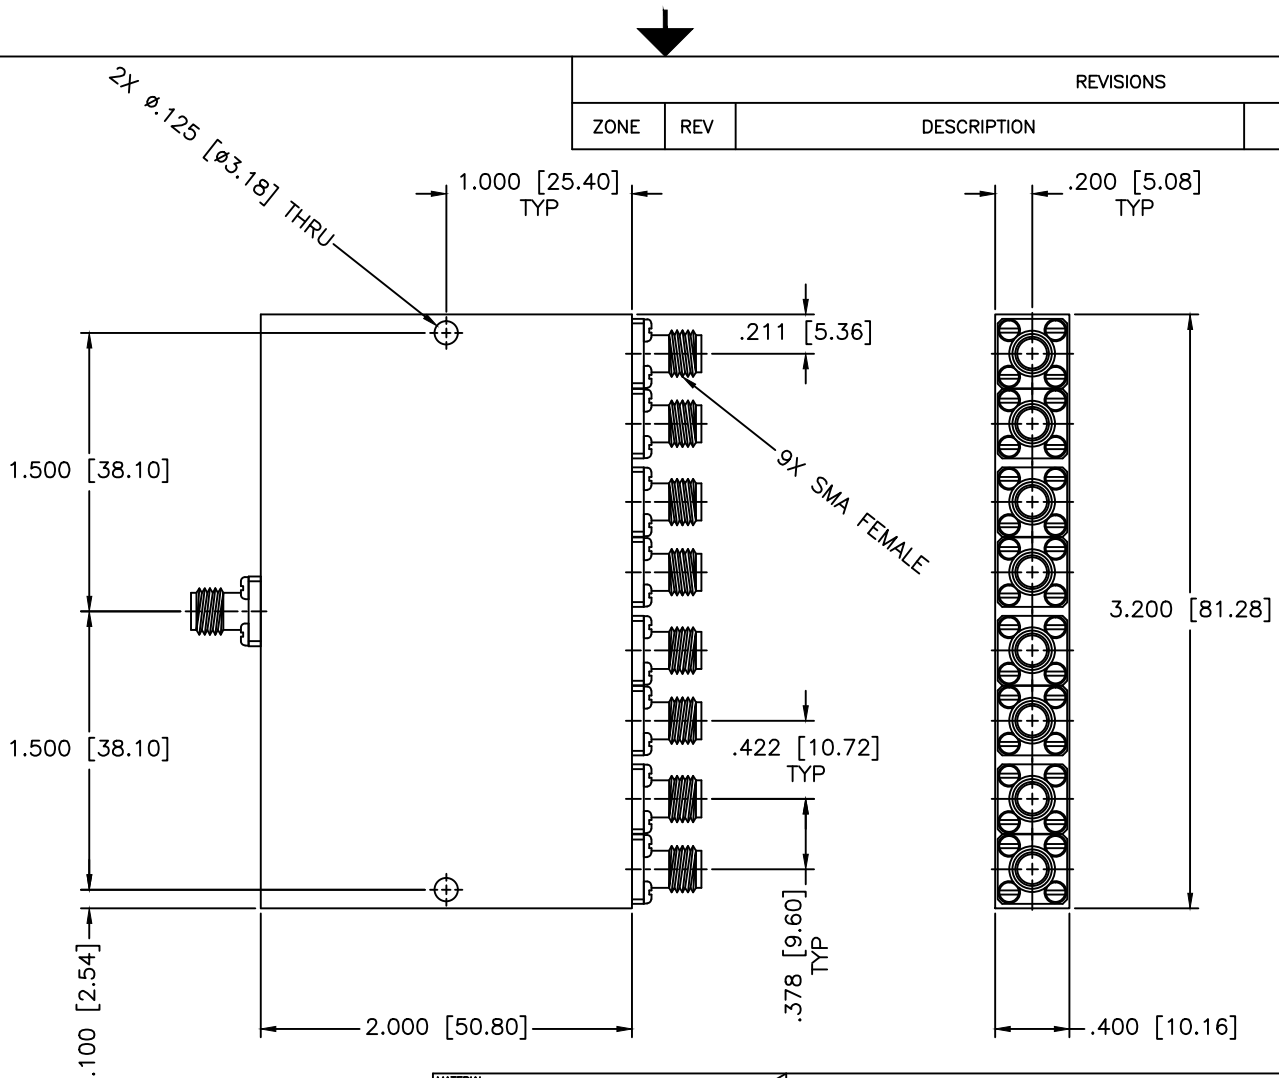

**SPECIFICATIONS**

Frequency Range: 3.4–4.2 GHz  
 VSWR In/Out: 1.40:1/1.30:1 Max.  
 Insertion Loss: 1.0dB Max.  
 Isolation: 19dB Min.  
 Phase Balance: ±6 Deg. Max.  
 Amplitude Balance: ±0.4dB Max.  
 Power Rating: 30W (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A	
					SHEET:	N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>8-WAY POWER DIVIDER</b>					
DRAWN: Paiboon Luekhamhan		DATE: 10-25-1999		PART NO. <b>PS8-119</b>			
APPROVED: T. Nguyen		DATE: 10-25-1999		CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 81479
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING			
		THIRD ANGLE PROJECTION					