


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

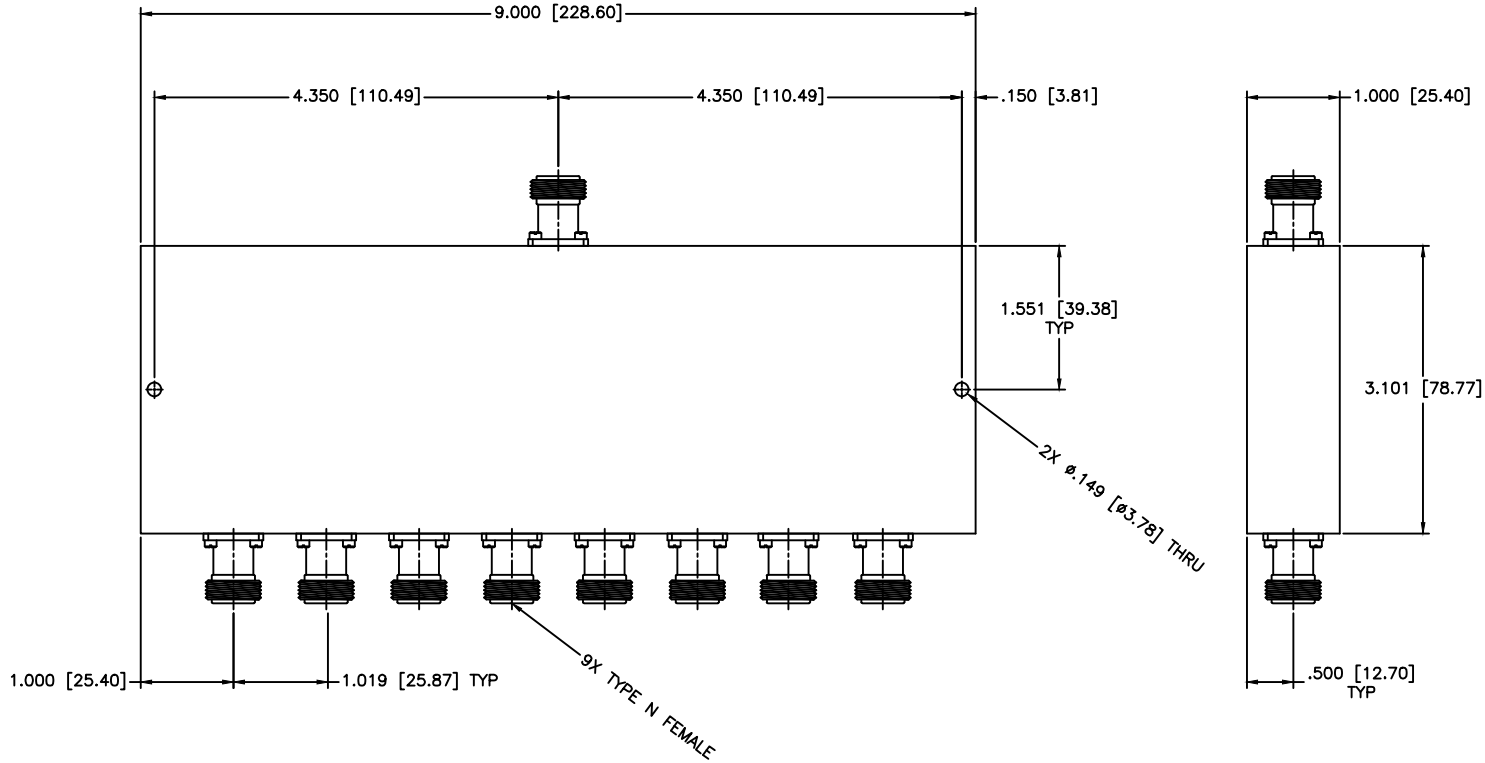

SPECIFICATIONS

Frequency Range: 5.8–6.7 GHz
 Insertion Loss: 0.8dB Max.
 Isolation: 40dB Min.
 Power Rating: 30 Watts
 Amplitude Balance: ± 0.5 dB
 VSWR: 1.40:1 Max.
 Phase Balance: ± 10 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE:		SHEET:
			PART NO.		8-WAY POWER DIVIDER	
			CAGE CODE:		PS8-120/IC	
DRAWN:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	SIZE:	REV:	DWG. NO.	
APPROVED:	DATE:		OD2L5	C	N/A	81019
			DO NOT SCALE THE DRAWING			