


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

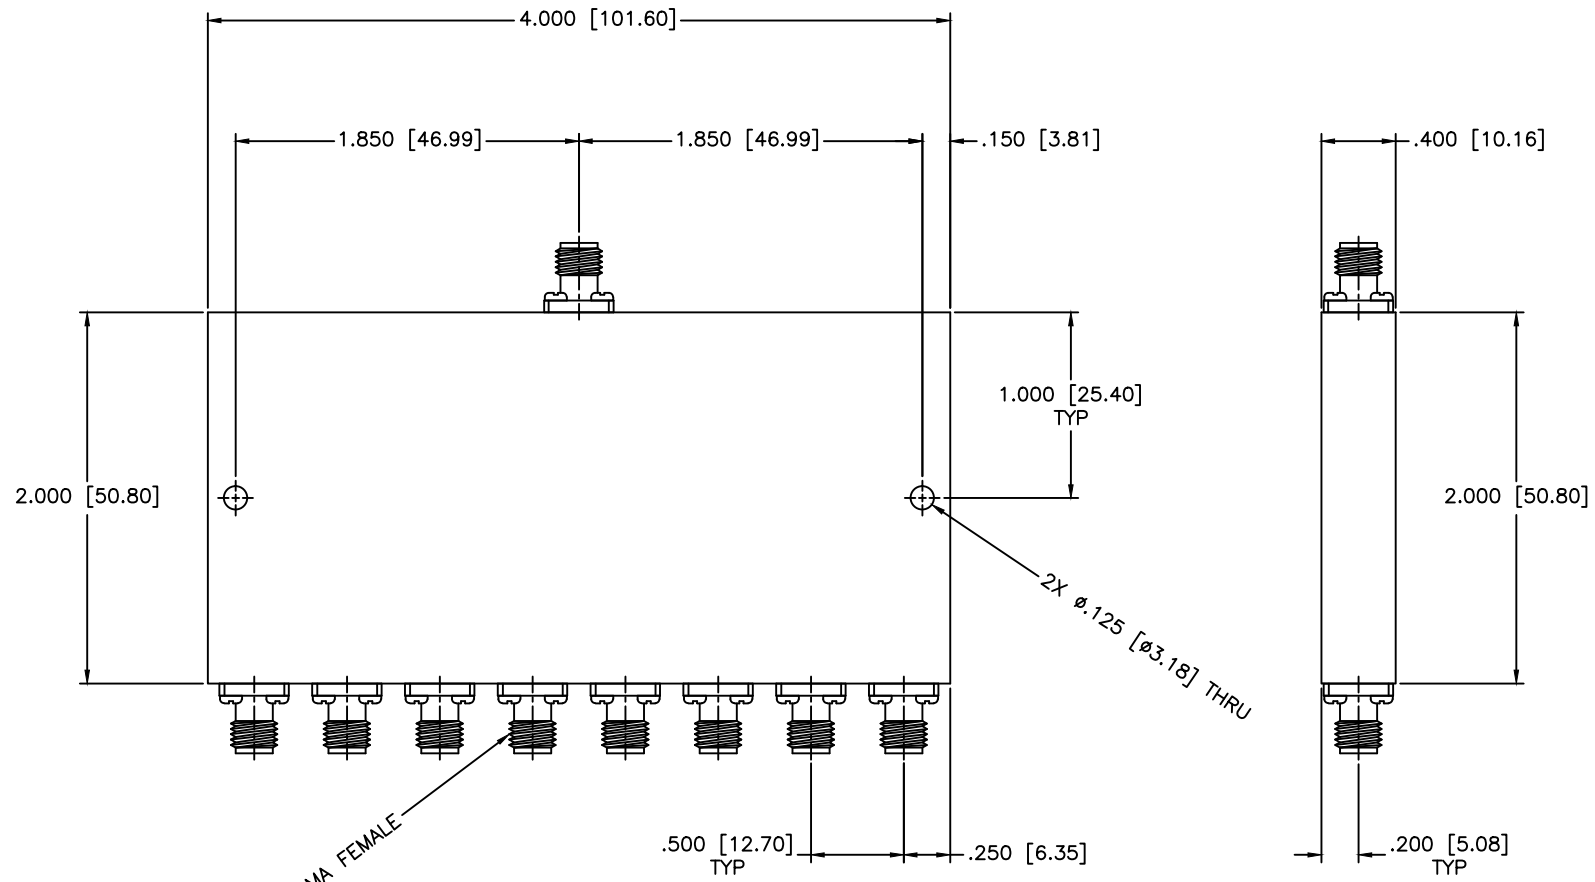

9X SMA FEMALE

**SPECIFICATIONS**

Frequency Range: 11.7–12.75 GHz  
 Insertion Loss: 2.2dB Max.  
 Isolation: 16dB Min.  
 Power Rating: 30 Watts  
 Amplitude Balance: ±0.6dB  
 VSWR IN/OUT: 1.70:1/1.65:1 Max.  
 Phase Balance: ±14 Deg. Max.

MATERIAL:	
DRAWN:	DATE:
Paiboon Luekhamhan	10-21-1999
APPROVED:	DATE:
T. Nguyen	10-21-1999

**MCLI** MICROWAVE COMMUNICATIONS LABORATORIES INC.  
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710  
 TEL: (727) 344-6254 FAX: (727) 381-6116  
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: <b>8-WAY POWER DIVIDER</b>		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. <b>PS8-121</b>		
THIRD ANGLE PROJECTION	CAGE CODE: <b>OD2L5</b>	SIZE: <b>A</b>	REV: <b>N/A</b>
	DO NOT SCALE THE DRAWING		DWG NO. <b>81478</b>